

SECURITIES AND EXCHANGE COMMISSION
WASHINGTON, DC 20549

FORM 6-K

REPORT OF FOREIGN PRIVATE ISSUER
PURSUANT TO RULE 13a-16 OR 15d-16 OF
THE SECURITIES EXCHANGE ACT OF 1934

Report on Form 6-K dated March 27, 2009

Commission File Number 1-14846

AngloGold Ashanti Limited
(Translation of registrant's name into English)

76 Jeppe Street
Newtown
Johannesburg, 2001
(P.O. Box 62117, Marshalltown, 2107)
South Africa
(Address of principal executive offices)

Indicate by check mark whether the registrant files or will file annual reports under cover of Form 20-F or Form 40-F.

Form 20-F Form 40-F

Indicate by check mark if the registrant is submitting the Form 6-K in paper as permitted by Regulation S-T Rule 101(b)(1):

Yes No

Indicate by check mark if the registrant is submitting the Form 6-K in paper as permitted by Regulation S-T Rule 101(b)(7):

Yes No

Indicate by check mark whether the registrant by furnishing the information contained in this Form is also thereby furnishing the information to the Commission pursuant to Rule 12g3-2(b) under the Securities Exchange Act of 1934.


Yes No

Enclosure: Press release ANGLOGOLD ASHANTI - 2008 MINERAL RESOURCES AND ORE RESERVES

Mineral Resource and Ore Reserve Report 2008



Scope



Annual Financial Statements
2008



Report to Society 2008



Mineral Resource and Ore
Reserve Report 2008



Country Reports 2008



Online Report 2008

Mineral Resources and Ore Reserves are reported in accordance with the minimum standards described by the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code, 2004 Edition), and also conform to the standards set out in the South African Code for the Reporting of Mineral Resources and Mineral Reserves (SAMREC 2000 Code). Mineral Resources are inclusive of the Ore Reserve component unless otherwise stated.

Information is presented both by country and by either operation or exploration project. The country overviews include the following tables: Mineral Resource and Ore Reserve, gold price and exchange rates, details of average drill-hole spacing and type, Ore Reserve modifying factors, development sampling results, Mineral Resource and Ore Reserve comparison by operation and Mineral Resource and Ore Reserve by-products. Topics for discussion include Geology, Mineral Resource estimation, exclusive Mineral Resource, Ore Reserve estimation and Inferred Mineral Resource in business plan. All Mineral Resources and Ore Reserves listed in this document are attributable unless otherwise stated.

The operational reviews include the following: Geology, Mineral Resource, exclusive Mineral Resource, Mineral Resource and Ore Reserve reconciliation, Mineral Resource and Ore Reserve by-products, Ore Reserves, grade tonnage information and competent persons.

This document, the Mineral Resource and Ore Reserve Report 2008, is a key component of the AngloGold Ashanti suite of 2008 annual reports produced to record the company's performance regarding its finances, operations, and sustainable development for the 12 months ended 31 December 2008. Other major documents in this suite of reports are the Annual Financial Statements 2008 and the Report to Society 2008, all of which together with the Country Reports are available on the corporate website, www.anglogoldashanti.com

The Annual Financial Statements 2008 contains a summary extract of AngloGold Ashanti's Mineral Resources and Ore Reserves.

Note:

Rounding of figures in this document may result in minor computational discrepancies. Throughout this report, dollar or \$ represents US dollar unless otherwise stated.

Contents

2	Corporate profile		
4	Mineral Resources and Ore Reserves – group overview		
7	Mineral Resources by country (attributable)		
9	Ore Reserves by country (attributable)		
10	Mineral Resources and Ore Reserves - by operation		
12	South Africa		
	Regional overview		
	Great Noligwa		
	Kopanang		
	Moab Khotsong		
	Tau Lekoa		
	Mponeng		
	Savuka		
	TauTona		
	Surface operations		
53	Argentina		
	Regional overview		
	Cerro Vanguardia		
59	Australia		
	Regional overview		
	Boddington		
	Sunrise Dam		
	Tropicana		
72	Brazil		
	Regional overview		
	Brasil Mineração		
	Serra Grande		
84	Colombia		
	Regional overview		
	Gramalote		
	La Colosa		
92	Democratic Republic of Congo		
	Regional overview		
	Mongbwalu		
97	Ghana		
	Regional overview		
	Iduapriem		
	Obuasi		
110	Guinea		
	Regional overview		
	Sigiri		
118	Mali		
	Regional overview		
	Morila		
	Sadiola		
	Yatela		
133	Namibia		
	Regional overview		
	Navachab		
139	Tanzania		
	Regional overview		
	Geita		
148	United States		
	Regional overview		
	Cripple Creek & Victor		
155	Resource and reserve definitions		
157	Glossary of terms		
IBC	Administrative information		

Corporate profile

ANGLOGOLD ASHANTI - A LEADING GLOBAL PRODUCER OF GOLD

Headquartered in Johannesburg, South Africa, the company has 21 operations and a number of exploration programmes in both the established and new gold-producing regions of the world.

In 2008, AngloGold Ashanti produced 4.98 million ounces of gold from its operations – an estimated 7% of global production – making it the third largest producer in the world. The bulk of its production came from deep-level underground operations (41%) and surface operations (2%) in South Africa. Contributions from other countries were Ghana (11%), Mali (8%), Australia (9%), Brazil (8%), Tanzania (5%), USA (5%), Guinea (7%), Argentina (3%) and Namibia (1%). In South Africa, ramping up of production at Moab Khotsong continued and is expected to increase significantly in 2009, and to be at full production levels in 2012.

During 2008, AngloGold Ashanti's global exploration programme continued to gain momentum, either directly or in collaboration with exploration partnerships and joint ventures, in Colombia and the Democratic Republic of Congo (DRC), Australia, Russia, China and the Philippines.

As at 31 December 2008, AngloGold Ashanti employed 62,895 people, including contractors, had Proved and Probable Ore Reserves of 74.9 million ounces of gold and had incurred capital expenditure of \$1,201 million for the year.


In response to an ever-changing socio-economic environment, AngloGold Ashanti has announced its intention to review its current structure and asset base. It remains a values-driven company and these values, the foremost of which is safety, and the group's business principles continue to guide the company, its managers and employees, and form the basis of the company's contract with all of its business – shareholders, employees, communities, business partners, governments and civil society organisations.

STOCK EXCHANGE INFORMATION

AngloGold Ashanti's primary stock exchange listing is on the JSE Limited (Johannesburg). It is also listed on the exchanges in New York, London, Australia and Ghana as well as on Euronext Paris and Euronext Brussels. AngloGold Ashanti had 353,483,410 ordinary shares in issue and a market capitalisation of \$9.8 billion as at 31 December 2008 (31 December 2007: \$11.9 billion).



AngloGold Ashanti global operations and exploration: 2008

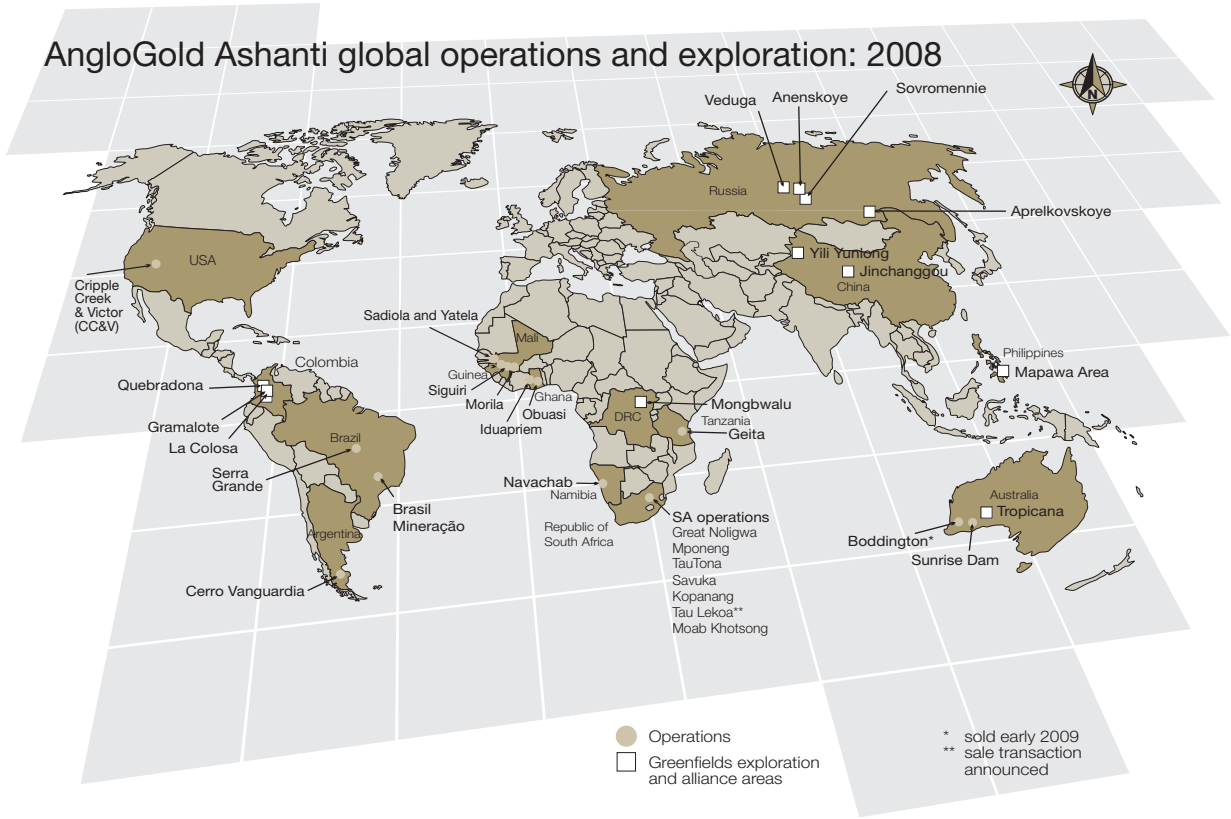

Mineral Resources

and Ore Reserves - group overview

Mineral Resources and Ore Reserves are reported in accordance with the minimum standards described by the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code, 2004 Edition), and also conform to the standards set out in the South African Code for the Reporting of Mineral Resources and Mineral Reserves (SAMREC 2000 Code). Mineral Resources are inclusive of the Ore Reserve component unless otherwise stated.

MINERAL RESOURCES

The 2008 Mineral Resource increased by 40.5 million ounces before the subtraction of depletion. After a depletion of 7.2 million ounces, the net increase is 33.4 million ounces to give a total Mineral Resource of 241.0 million ounces. Mineral Resources were estimated at a gold price of \$1,000/oz (2007: \$700/oz). The increased gold price resulted in 13.3 million ounces being added to the Mineral Resource while successful exploration and revised modelling resulted in a further increase of 27.5 million ounces. The remaining loss of 0.3 million ounces is the result of various other reasons.

Mineral Resource		Million oz
Mineral Resource as at 31 December 2007		207.6
Reductions		
TauTona	Transfers to Mponeng	(1.9)
Great Noligwa	Transfer of SV4 to Moab Khotsong	(1.2)
Tau Lekoa	Significant structure and facies changes to the north of Tau Lekoa	(1.2)
Other	Total of non-significant changes	(1.4)
Additions		
La Colosa	Successful greenfields exploration	12.3
Mponeng	Granting of WUDL's licence and transfers from TauTona	7.9
Moab Khotsong	Transfer of SV4 to Moab Khotsong	4.4
Obuasi	Exploration below 50 Level	3.9
Savuka	Improved economic outlook as a result of an increase in the gold price	1.8
Boddington	Growth in Mineral Resources: successful near-mine exploration drilling and higher gold price	1.6
Iduapriem	Due to increase in Mineral Resource gold price and remodelling of Block 7 & 8	1.4
Cripple Creek & Victor	Successful exploration	1.2
Sadiola	Due to increase in Mineral Resource gold price, increase in deep sulphides project	1.2
Siguiri	Due to increase in Mineral Resource gold price and increases in the Mineral Resource at Sintroko and Foulata	1.0
Other	Total of non-significant changes	2.4
Mineral Resource as at 31 December 2008		241.0

ORE RESERVES

The 2008 Ore Reserve increased by 7.7 million ounces before the subtraction of depletion. After a depletion of 5.9 million ounces, the net increase is 1.8 million ounces to give a total Ore Reserve of 74.9 million ounces.

A gold price of \$720/oz was used for Ore Reserve estimates (2007: \$600/oz). The change in economic assumptions made from 2007 to 2008 resulted in the Ore Reserve increasing by 2.7 million ounces while exploration and modelling resulted in an additional increase of 5.0 million ounces.

Ore Reserve		Million oz
Ore Reserve as at 31 December 2007		73.1
Reductions		
TauTona	Carbon Leader ground between 123-126 levels was transferred to Mponeng. With the change to scattered grid mining, lower value estimates resulting from increased sampling and drilling resulted in reductions. These were partially offset by a higher mine call factor and the inclusion of the Carbon Leader eastern block.	(1.5)
Geita	Mineral Resource model changes and the application of grade factors to mitigate low model confidence; cost increases	(1.4)
Great Noligwa	Transfer of the SV4 section to Moab Khotsong	(1.3)
Other	Total of non-significant changes	(1.1)
Additions		
Mponeng	Increased grades, the additional ground from TauTona 123-126 level and improved economics which allowed for the mining of Block 3 & 5	2.8
Obuasi	The increase is due to a revised mine design and schedule	1.3
Boddington	The growth in Ore Reserve is due to successful drilling and a higher gold price	1.1
Siguiri	The Seguelen NW and Sintroko deposits were upgraded from Inferred to Indicated and the mining efficiency increased	0.6
Other	Total of non-significant changes	1.3
Ore Reserve as at 31 December 2008		74.9



Mineral Resources and Ore Reserves *cont.*

BY-PRODUCTS

Several by-products are recovered as a result of the processing of gold Ore Reserves.

These include 0.19 million tonnes of uranium from the South African operations, 0.29 million tonnes of copper from Australia, 0.44 million tonnes of sulphur from Brazil and 35.7 million ounces of silver from Argentina.

EXTERNAL AUDIT OF MINERAL RESOURCE AND ORE RESERVE STATEMENT

During the course of the year and as part of the rolling audit programme, the AngloGold Ashanti's 2008 Mineral Resources and Ore Reserves for the following operations were submitted for external audit:

- Mponeng
- TauTona
- Vaal River Surface Sources
- Iduapriem
- Navachab
- Sadiola
- Yatela

The company has been informed that the audit identified no material shortcomings in the process by which AngloGold Ashanti's Ore Reserves and Mineral Resources were evaluated. It is the company's intention to continue this process so that each of its operations will be audited every three years on average.

COMPETENT PERSONS

The information in this report that relates to Exploration Results, Mineral Resources and Ore Reserves is based on information compiled by the competent person. These individuals are identified in the report. The competent person consent to the inclusion of Exploration Results, Mineral Resources and Ore Reserves information in this report, in the form and context in which it appears.

During the past decade, the company has developed and implemented a rigorous system of internal and external reviews of Exploration Results, Mineral Resources or Ore Reserves. A documented chain of responsibility exists from the competent person at the operations to the company's Mineral Resource and Ore Reserve Steering Committee. Accordingly, the Chairman of the Mineral Resource and Ore Reserve Steering Committee VA Chamberlain, MSc (Mining Engineering), BSc (Hons) (Geology), MAusIMM, assumes responsibility for the Mineral Resource and Ore Reserve processes for AngloGold Ashanti and is satisfied that the competent person have fulfilled their responsibilities.



Mineral Resources by country (attributable) inclusive of Ore Reserves

as at 31 December 2008	Resource category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
South Africa	Measured	25.56	13.80	352.57	11.34
	Indicated	739.87	3.27	2,416.79	77.70
	Inferred	56.35	10.47	590.06	18.97
	Total	821.77	4.09	3,359.42	108.01
Argentina	Measured	11.01	1.73	19.04	0.61
	Indicated	22.00	3.48	76.49	2.46
	Inferred	4.97	4.11	20.45	0.66
	Total	37.99	3.05	115.98	3.73
Australia	Measured	101.25	1.19	120.77	3.88
	Indicated	404.49	0.84	340.15	10.94
	Inferred	154.79	0.89	138.43	4.45
	Total	660.53	0.91	599.35	19.27
Brazil	Measured	11.11	7.01	77.80	2.50
	Indicated	13.46	6.49	87.36	2.81
	Inferred	28.51	6.76	192.59	6.19
	Total	53.07	6.74	357.75	11.50
Colombia	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	409.77	1.01	415.45	13.36
	Total	409.77	1.01	415.45	13.36
Democratic Republic of Congo	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	29.25	2.69	78.53	2.52
	Total	29.25	2.69	78.53	2.52
Ghana	Measured	94.21	5.21	490.68	15.78
	Indicated	138.91	2.86	397.31	12.77
	Inferred	100.10	4.25	425.27	13.67
	Total	333.23	3.94	1,131.26	42.22
Guinea	Measured	33.53	0.63	21.25	0.68
	Indicated	125.22	0.84	105.53	3.39
	Inferred	64.08	0.90	57.85	1.86
	Total	222.82	0.83	184.63	5.94
Mali	Measured	19.40	1.64	31.86	1.02
	Indicated	26.39	2.48	65.32	2.10
	Inferred	11.10	2.30	25.49	0.82
	Total	56.89	2.16	122.68	3.94
Namibia	Measured	13.83	0.74	10.25	0.33
	Indicated	61.94	1.26	78.05	2.51
	Inferred	42.31	1.09	46.25	1.49
	Total	118.08	1.14	134.55	4.33
Tanzania	Measured	–	–	–	–
	Indicated	83.84	3.63	304.10	9.78
	Inferred	25.12	3.81	95.77	3.08
	Total	108.97	3.67	399.87	12.86
United States	Measured	255.90	0.87	223.31	7.18
	Indicated	183.75	0.73	134.97	4.34
	Inferred	83.61	0.66	55.60	1.79
	Total	523.26	0.79	413.88	13.31
Total	Measured	565.80	2.38	1,347.53	43.32
	Indicated	1,799.87	2.23	4,006.08	128.80
	Inferred	1,009.96	2.12	2,141.75	68.86
	Total	3,375.63	2.22	7,495.36	240.98

Mineral Resources

and Ore Reserves *cont.*

Mineral Resources by country (attributable) exclusive of Ore Reserves					
as at 31 December 2008	Resource category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
South Africa	Measured	14.62	14.08	205.80	6.62
	Indicated	556.66	2.70	1,504.17	48.36
	Inferred	56.35	10.47	590.06	18.97
	Total	627.63	3.66	2,300.04	73.95
Argentina	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	–	–	–	–
	Total	–	–	–	–
Australia	Measured	34.85	1.38	48.22	1.55
	Indicated	189.99	0.78	147.58	4.74
	Inferred	154.79	0.89	138.43	4.45
	Total	379.63	0.88	334.22	10.75
Brazil	Measured	3.20	6.63	21.20	0.68
	Indicated	6.63	6.29	41.74	1.34
	Inferred	27.49	6.81	187.13	6.02
	Total	37.32	6.70	250.06	8.04
Colombia	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	409.77	1.01	415.45	13.36
	Total	409.77	1.01	415.45	13.36
Democratic Republic of Congo	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	29.25	2.69	78.53	2.52
	Total	29.25	2.69	78.53	2.52
Ghana	Measured	33.32	6.42	241.08	6.88
	Indicated	73.90	2.48	183.06	5.89
	Inferred	56.46	3.75	211.95	6.81
	Total	163.69	3.72	609.09	19.58
Guinea	Measured	5.57	0.70	3.91	0.13
	Indicated	37.13	0.79	29.51	0.95
	Inferred	64.36	0.91	58.49	1.88
	Total	107.06	0.86	91.91	2.95
Mali	Measured	4.34	0.81	3.50	0.11
	Indicated	21.42	2.37	50.75	1.63
	Inferred	11.10	2.30	25.49	0.82
	Total	36.87	2.16	79.74	2.56
Namibia	Measured	6.63	0.56	3.71	0.12
	Indicated	34.36	1.18	40.61	1.31
	Inferred	42.31	1.09	46.25	1.49
	Total	83.30	1.09	90.58	2.91
Tanzania	Measured	–	–	–	–
	Indicated	35.95	3.32	119.38	3.84
	Inferred	25.12	3.81	95.77	3.08
	Total	61.07	3.52	215.15	6.92
United States	Measured	143.33	0.83	118.71	3.82
	Indicated	128.04	0.67	86.38	2.78
	Inferred	83.61	0.66	55.60	1.79
	Total	354.99	0.73	260.69	8.38
Total	Measured	245.87	2.52	619.12	19.91
	Indicated	1,084.10	2.03	2,203.18	70.83
	Inferred	960.61	1.98	1,903.16	61.19
	Total	2,290.58	2.06	4,725.46	151.93

Ore Reserves by country (attributable)


as at 31 December 2008		Tonnes	Grade	Contained	Contained
	Category	million	g/t	gold	gold
				tonnes	Moz
South Africa	Proved	13.72	7.81	107.13	3.44
	Probable	215.10	4.37	939.79	30.21
	Total	228.82	4.58	1,046.92	33.66
Argentina	Proved	9.99	1.39	13.90	0.45
	Probable	12.29	3.52	43.24	1.39
	Total	22.27	2.56	57.13	1.84
Australia	Proved	67.82	1.10	74.54	2.40
	Probable	214.50	0.90	192.57	6.19
	Total	282.33	0.95	267.11	8.59
Brazil	Proved	7.77	6.44	50.06	1.61
	Probable	7.02	5.82	40.87	1.31
	Total	14.79	6.15	90.93	2.92
Ghana	Proved	56.85	4.24	240.89	7.74
	Probable	36.43	3.82	139.10	4.47
	Total	93.28	4.07	379.98	12.22
Guinea	Proved	56.13	0.56	31.48	1.01
	Probable	67.11	1.04	69.64	2.24
	Total	123.24	0.82	101.12	3.25
Mali	Proved	9.29	1.87	17.33	0.56
	Probable	6.65	2.26	15.02	0.48
	Total	15.94	2.03	32.35	1.04
Namibia	Proved	7.21	0.89	6.39	0.21
	Probable	27.58	1.28	35.19	1.13
	Total	34.78	1.20	41.58	1.34
Tanzania	Proved	–	–	–	–
	Probable	54.30	2.93	159.06	5.11
	Total	54.30	2.93	159.06	5.11
United States	Proved	122.57	0.93	104.60	3.36
	Probable	55.70	0.87	48.59	1.56
	Total	168.27	0.91	153.19	4.93
Total	Proved	341.35	1.89	646.31	20.78
	Probable	696.67	2.42	1,683.07	54.11
	Total	1,038.02	2.24	2,329.38	74.89



Mineral Resources


and Ore Reserves - by operation



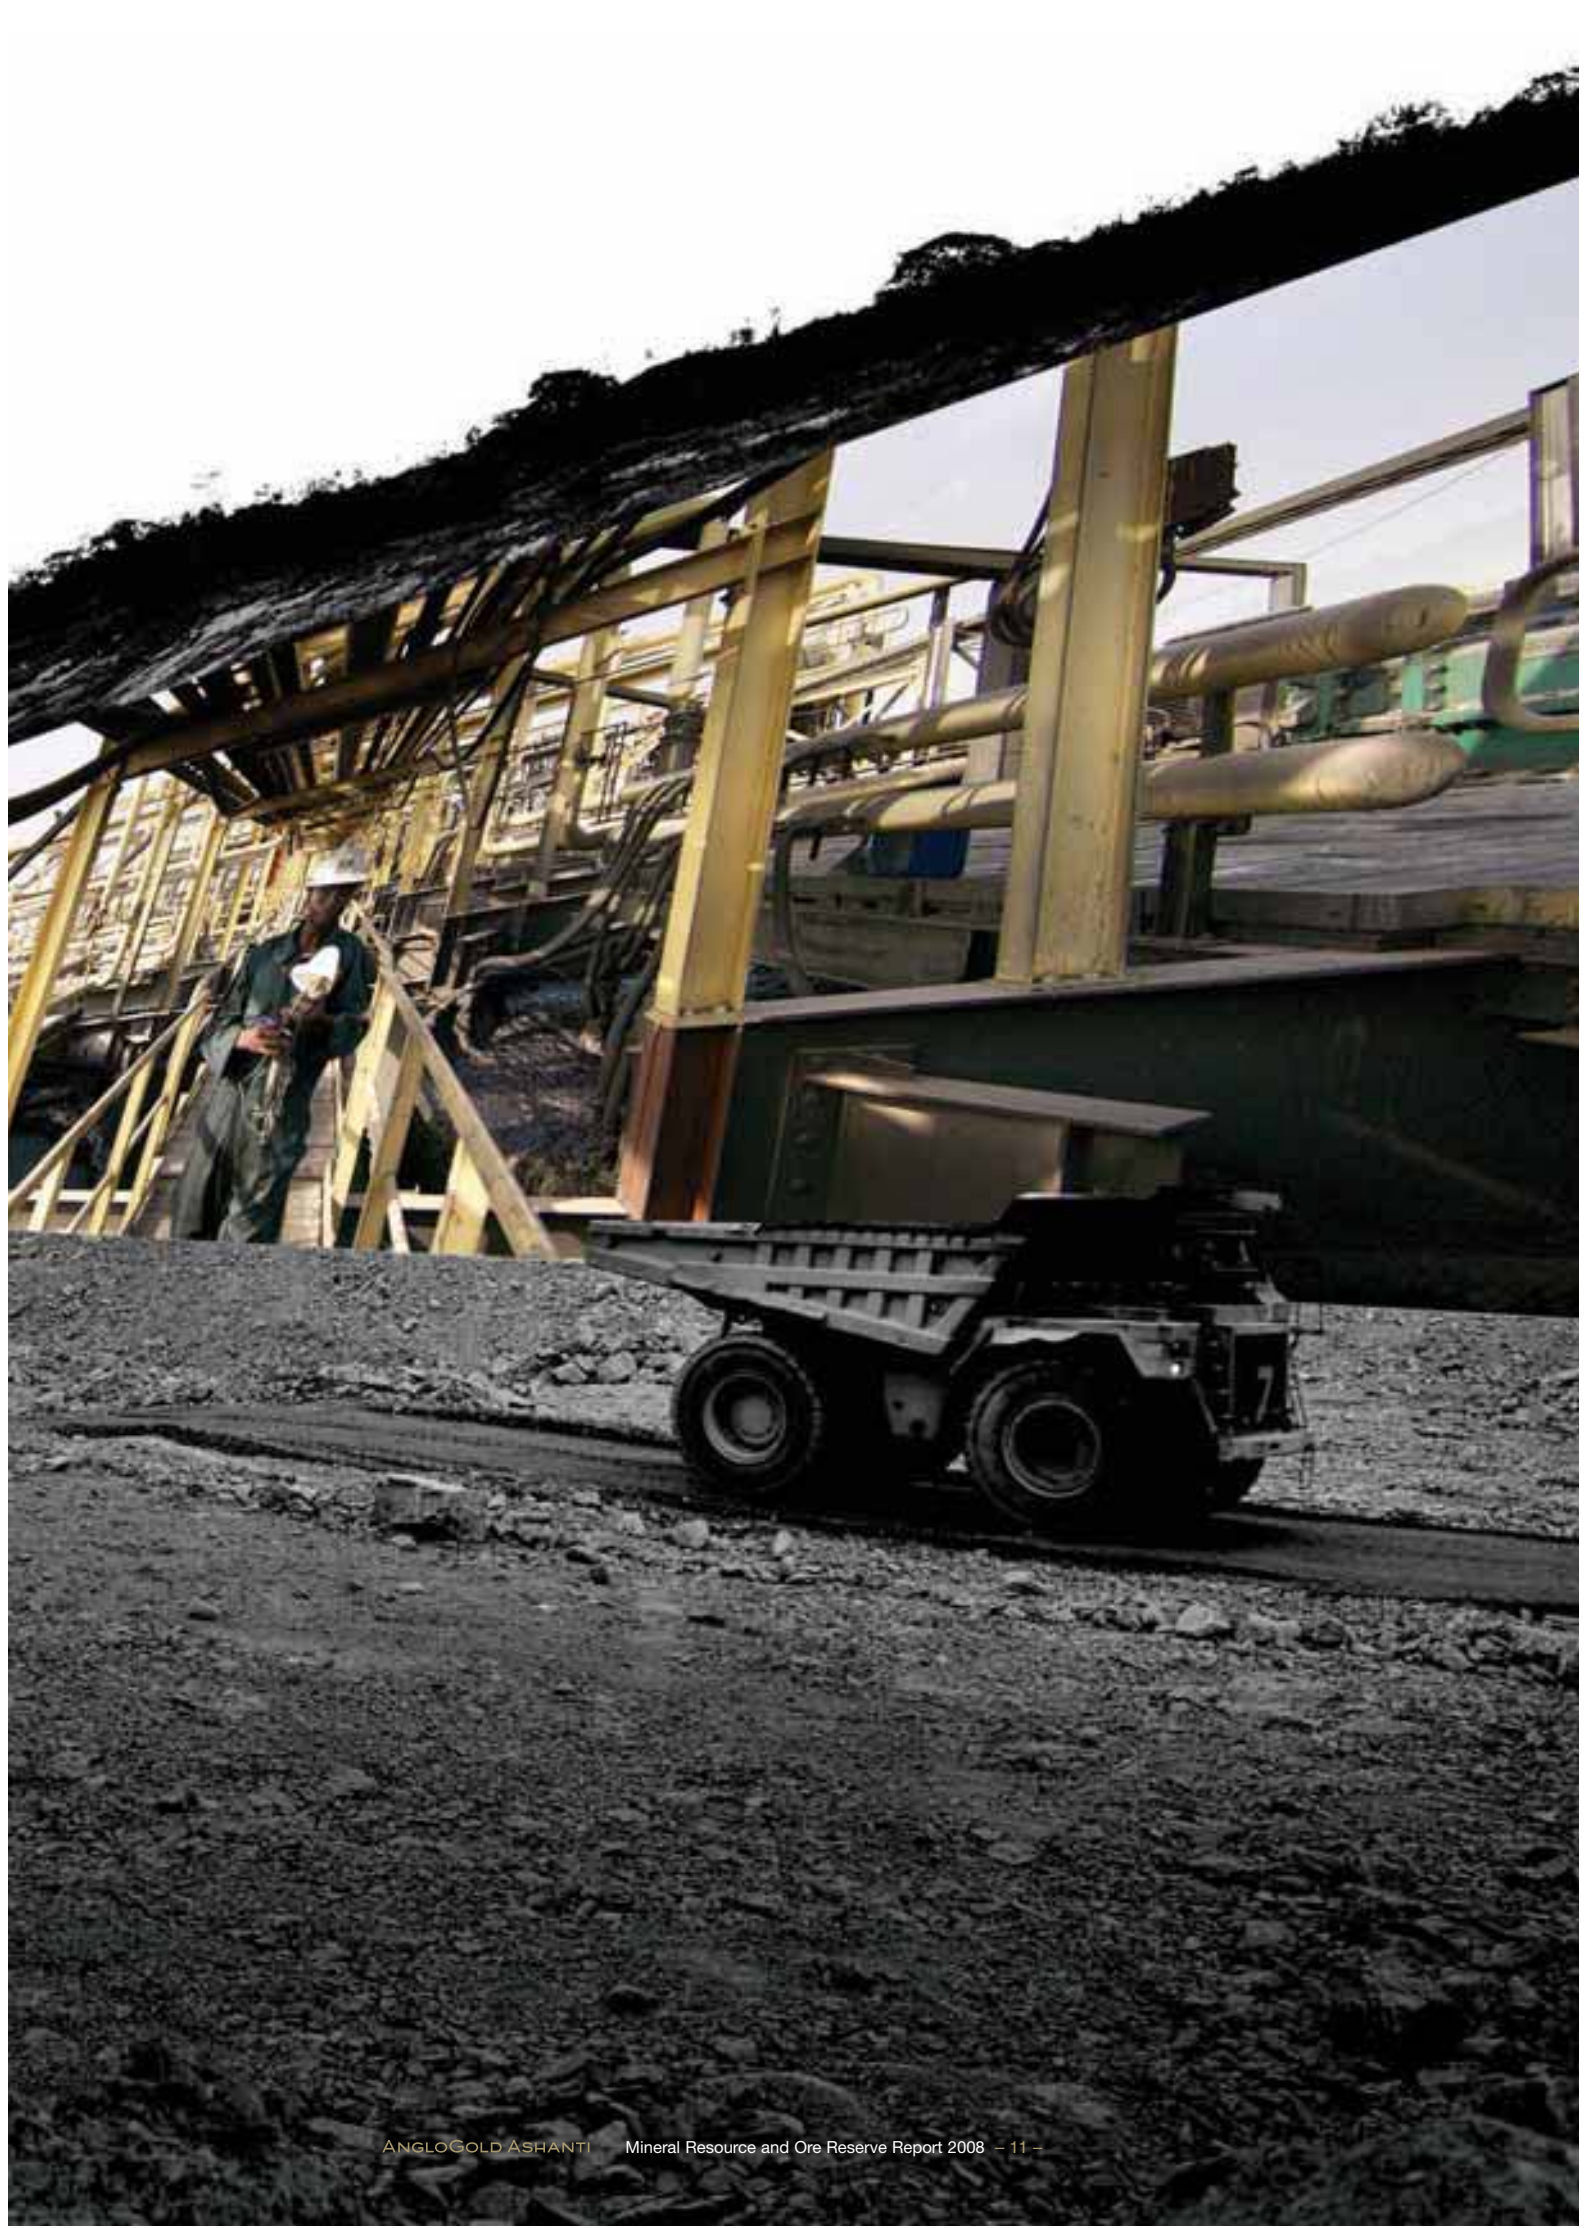

South Africa

Regional overview

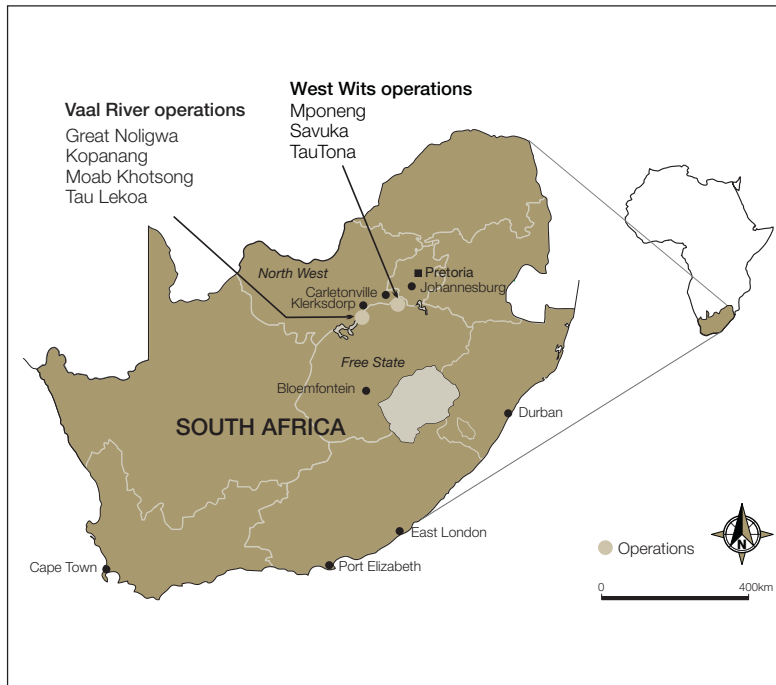

The South African operations comprise seven underground mines located in two geographical regions on the Witwatersrand Basin called the Vaal River and West Wits operations.

The **Vaal River operations** consist of the Great Noligwa, Kopanang, Moab Khotsong and Tau Lekoa mines. The primary reefs mined in this region are the Vaal Reef (VR) and the Ventersdorp Contact Reef (VCR) and the secondary reef mined is the Crystalkop Reef (C Reef).

The **West Wits operations** are made up of Mponeng, Savuka and TauTona, which are situated near the town of Carletonville. The primary reefs mined are the Carbon Leader Reef (CLR) and the VCR.



All seven operations are 100% owned by AngloGold Ashanti. In addition, the Vaal River Surface and West Wits Surface operations mine the waste rock dumps and tailings dams which result from the mining and processing of the primary and secondary reef horizons.

The South African operations are all located in the rocks of the famous Witwatersrand Basin, which is regarded as the greatest gold-bearing repository on Earth.

GEOLOGY OF THE WITWATERSRAND BASIN

The Witwatersrand Supergroup (deposited in area often described as the Witwatersrand Basin) comprises a six-kilometre thick sequence of predominantly argillaceous and arenaceous sediments that extend laterally for some 300 kilometres north-east/south-west and 100 kilometres north-west/south-east on the Kaapvaal Craton. The upper portion of the sequence contains the laterally extensive, gold-bearing quartz pebble conglomerate horizons (commonly referred to as "reefs").

Further west, south and east the basin is overlain by up to four kilometres of Archaean, Proterozoic and Mesozoic volcanic and sedimentary rocks. The Witwatersrand Basin is late Archaean in age and is considered to be around 2.7 to 2.8 billion years old.

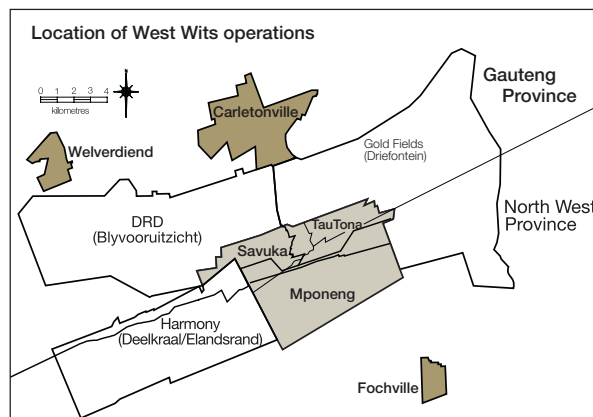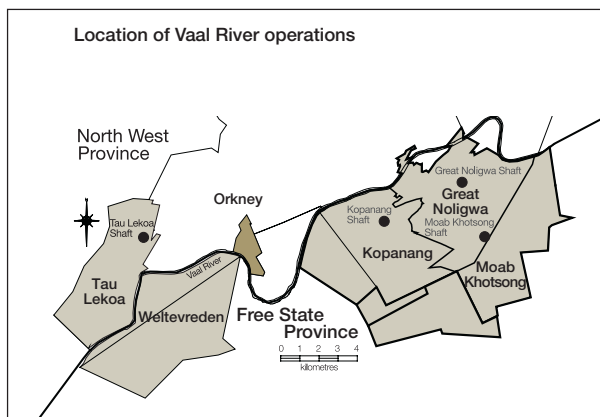

The reefs, which are generally less than two metres thick, are widely considered to represent laterally extensive braided fluvial deposits. Separate fan systems were developed at different entry points and these are preserved as distinct goldfields with local geological variations. AngloGold Ashanti operates in two of these goldfields, known as the Carletonville (West Wits) and Klerksdorp (Vaal River) goldfields.

There is still much debate about the origin of the gold mineralisation in the Witwatersrand Basin. Gold was generally considered to have been deposited syngenetically with the conglomerates, but increasingly an epigenetic theory of origin is being supported. Nonetheless, the most fundamental determinant of gold distribution in the basin remains the sedimentary features, such as facies variations and channel directions. Gold generally occurs in native form often associated with pyrite and carbon, with quartz being the main gangue mineral.

WEST WITS OPERATIONS

Two reef horizons are exploited at the West Wits operations: the VCR, located at the top of the Central Rand Group, and the CLR near the base. The separation between the two reefs increases from north to south, from 400 metres to 900 metres, owing to non-conformity of the VCR horizon. TauTona and Savuka exploit both reefs, while Mponeng currently only mines the VCR. The structure is relatively simple, with rare instances of faults greater than 70 metres.

The CLR consists of one or more conglomerate units and varies from several centimetres to more than three metres in thickness. Regionally, the VCR dips at approximately 21°, but may vary between 5° and 50°, accompanied by changes in thickness of the conglomerate units. Where the conglomerate has the attitude of the regional dip, it tends to be thick, well-developed and accompanied by higher gold accumulations. Where the attitude departs significantly from the regional dip, the reef is thin and gold grades tend to be erratic.

VAAL RIVER OPERATIONS

In order of importance, the reefs mined at the Vaal River operations are the VR, the VCR and the C Reef:

- The VR contains approximately 85% of the Ore Reserve tonnage with mining grades of between 10g/t and 20g/t gold and comprises a series of oligomictic conglomerates and quartzite packages developed on successive non-conformities. Several distinct facies have been identified, each with its own unique gold distribution and grade characteristic;

South Africa

cont.

- The VCR has a lower gold grade than the VR, and contains approximately 15% of the estimated Ore Reserve. The economic portion is concentrated in the western part of the lease area and can take the form of a massive conglomerate, a pyritic sand unit with intermittent pebble layers, or a thin conglomerate horizon. The reef is located at the contact between the overlying Kliprivierberg Lavas of the Ventersdorp Super Group and the underlying sediments of the Witwatersrand Super Group, which creates a distinctive seismic reflector. The VCR is located up to one kilometre above the VR; and
- The C Reef is a thin, small-pebble conglomerate with a carbon-rich basal contact, located approximately 270 metres above the VR. It has less than 1% of the estimated Ore Reserve with gold grades similar to those of the VR, but less continuity. The most significant structural features are the north-east striking normal faults which dip to the north-west and south-east, resulting in zones of fault loss.

Mineral Resource and Ore Reserve gold prices and exchange rates

	Units	2008	2007
Gold price – Mineral Resource	US\$/oz	1,000	700
Gold price – Ore Reserve	US\$/oz	720	600
Exchange rate – South Africa	ZAR/US\$	8.67	7.70

MINERAL RESOURCE ESTIMATION

A multi-disciplinary approach is adapted to Mineral Resource estimation whereby inputs are required from the geoscience, survey, and mine planning departments. A computerised system called the Mineral Resource Inventory System (MRIS) integrates all the input information to produce the final Mineral Resource per operation. Mineral Resource estimates are computed from a composite grid of value estimates, comprising various block sizes. The macro block sizes vary from 210m x 210m to 420m x 420m with micro blocks of 30m x 30m.

Compound lognormal macro co-kriging estimation techniques are used to produce estimates for the larger block sizes. This technique uses the Bayesian approach whereby the assayed (observed) data in the mined-out areas are used to infer the population characteristics of the area ahead of current mining. The geological model forms the basis for this estimation and all surface borehole information from the peripheral areas of the mine lease play a crucial role in determining the geological model boundaries. Simple kriging is used for the 30-metre block sizes and these estimates are constrained by the kriging variance.

The Mineral Resources are initially reported as inclusive of Ore Reserves as they form the basis for the Ore Reserve conversion process. Mineral Resource cut-offs are computed by operation, for each reef horizon. These cut-offs incorporate a profit margin that is relevant to the business plan. Mineral Resource grade tonnage curves are produced for the individual operations, which show the potential of the orebody at different cut-offs. These curves are produced for dimensions equivalent to a practical mining unit for underground operations.

EXCLUSIVE MINERAL RESOURCE

The exclusive Mineral Resource is defined as the inclusive Mineral Resource minus the in-situ Ore Reserve before stoping width, dilution and mine call factors are applied. Scoping studies are conducted on this exclusive Mineral Resource, where capital requirements and current costs are used to test economic potential. If these studies show no reasonable economic potential at the Mineral Resource gold price then the material is excluded from the Mineral Resource. All planned pillars (ahead of current mining) form part of the exclusive Mineral Resource.

Details of average drillhole spacing and type in relation to Mineral Resource classification

Mine/Project	Category	Spacing m (- x -)	Diamond drilling	Chip sampling	Comments
South African mines	Measured	5 x 5		✓	Based on constrained kriging variance, supported by chip sampling in stopes
	Indicated	2 x 200	✓	✓	Supported by underground drillholes and chip sampling of reef development ends
	Inferred	1,000 x 1,000	✓		Supported by surface drillholes
	Grade control	5 x 5		✓	Chipped channel samples

ORE RESERVE ESTIMATION

All mine designs are undertaken using the Cadmine® software package and include the delineation of mining or stoping areas for each mining level and section, usually leading from an extension to the existing mining sequence, and the definition of the necessary development layouts. The in situ Mineral Resource is scheduled monthly for the full Life-Of-Mine (LOM) plan. The value estimates for these schedules are derived directly from the Mineral Resource Inventory System (MRIS).

Modifying factors are applied to the in situ Mineral Resource to arrive at an Ore Reserve. These factors comprise a dilution factor to accommodate the difference between the mill width and the stoping width as well as the mine call factor (MCF).

INFERRED MINERAL RESOURCE IN BUSINESS PLAN

The LOM plans include minimal Inferred Mineral Resources.



South Africa

cont.

Ore Reserve modifying factors						
as at 31 December 2008						
Mine	Ore Reserve Cut-off grade g/t Au	Cut-off value cmg/t Au	Stoping width cm	Dilution %	Mine call factor (MFC) %	Metallurgical recovery %
Great Noligwa						
Crystalkop Reef	4.70	600	128	10.0	66.62	96.13
Vaal Reef	3.74	600	160	34.0	66.62	96.13
Kopanang						
Crystalkop Reef	4.90	500	102	23.0	68.49	97.81
VR Base	4.90	500	102	23.0	68.49	97.81
VR EDOM	4.90	500	102	18.0	68.49	97.81
Moab Khotsong						
Middle Mine Area	4.70	700	149	49.0	79.11	97.20
PZ 2	5.03	700	139	25.0	78.00	96.67
Top Mine Area	4.17	700	168	28.0	67.00	97.20
Tau Lekoa						
VCR Base	2.78	400	144	31.0	84.32	97.35
Mponeng						
CL Below 120 Level	7.50	750	100	10.0	81.00	98.67
VCR 109 to 120 level	5.36	750	140	40.0	90.13	98.21
VCR Above 901 Level	5.36	750	140	39.0	90.13	98.21
VCR Below 120 level	5.36	750	140	36.0	90.13	98.21
Savuka						
Carbon Leader Reef	7.96	900	113	81.0	62.70	97.50
Ventersdorp Contact Reef	7.96	900	113	54.0	62.70	97.50
TauTona						
CLR Base	7.67	729	95	112.0	80.97	97.82
CLR Below 120	7.67	729	95	92.0	81.01	97.82
Remnant CLR Shaft Pillar	7.29	729	100	54.0	80.97	97.82
VCR Shaft Pillar	7.54	729	127	100.0	85.00	97.82
Vaal River Surface						
SA Met – Rock Dump	0.32	–	–	–	100.00	91.00
SA Met – Tailings Dump	0.25	–	–	–	100.00	48.00
West Wits Surface						
WWGO – Rock Dump	0.24	–	–	–	100.00	91.00

Development sampling results – January to December 2008

Development values represent actual results of sampling, no allowances having been made for adjustments necessary in estimating Ore Reserves.

Statistics are shown in metric units	Advanced	Sampled	Average	Sampled gold		Uranium	
	metres		channel	Average	Average	Average	Average
	(total)	metres	width (cm)	g/t	cm g/t	kg/t	cm kg/t
VAAL RIVER							
Great Noligwa							
Vaal Reef	4,825	404	124.3	29.34	3,647	1.60	199.35
Kopanang							
Vaal Reef	24,818	2,564	18.4	79.62	1,465	5.25	96.09
Moab Khotsong							
Vaal Reef	16,558	1,478	124.3	19.64	2,441	1.07	129.42
Tau Lekoa							
Ventersdorp Contact Reef	7,509	546	86.2	13.07	1,127	–	–
WEST WITS							
Mponeng							
Ventersdorp Contact Reef	17,673	3,208	74.0	33.50	2,479	–	–
Savuka							
Ventersdorp Contact Reef	–	–	–	–	–	–	–
Carbon Leader Reef	2,882	274	50.1	80.74	4,045	–	–
TauTona							
Ventersdorp Contact Reef	315	–	–	–	–	–	–
Carbon Leader Reef	8,657	264	16.0	153.06	2,449	1.74	27.85



South Africa

cont.

Reconciliation of Mineral Resource and Ore Reserve									
as at 31 December 2008			Changes in gold contained						
Mine	Category	2007	Deple- tion ⁽¹⁾	Model change ⁽²⁾	Moz Scope change ⁽³⁾	2008	Net Diff	change %	Comment
Great Noligwa	Resource	8.83	(0.49)	(0.25)	(0.45)	7.65	(1.19)	(13)	Transfer of the SV4 section from Great Noligwa to Moab Khotsong
	Reserve	3.90	(0.31)	(0.30)	(0.67)	2.63	(1.28)	(33)	Transfer of the SV4 section from Great Noligwa to Moab Khotsong
Kopanang	Resource	9.35	(0.60)	(0.16)	0.89	9.49	0.14	1	
	Reserve	4.34	(0.36)	0.03	–	4.00	(0.34)	(8)	Favourable economics offset by depletions and grade reduction
Moab Khotsong	Resource	13.79	(0.38)	2.92	1.90	18.24	4.45	32	Transfer of the SV4 section from Great Noligwa to Moab Khotsong
	Reserve	6.97	(0.21)	(0.01)	0.57	7.32	0.36	5	Transfer of the SV4 section from Great Noligwa to Moab Khotsong
Tau Lekoa	Resource	6.49	(0.18)	(0.68)	(0.32)	5.31	(1.18)	(18)	Significant geological structure and facies changes to the north of Tau Lekoa
	Reserve	1.29	(0.15)	(0.22)	–	0.92	(0.37)	(29)	Lower average resource value (down by 53 cmg/t), geological losses and reclassification of Mineral Resources resulting from information gained from borehole G55
Mponeng	Resource	41.56	(0.76)	5.78	2.85	49.43	7.87	19	Granting of the WUDL's licence and transfers from TauTona
	Reserve	10.15	(0.62)	1.41	2.06	12.99	2.84	28	Increasing in grade, additional ground from TauTona 123-126 level as well as Mponeng PASR blocks 3 & 5
Savuka	Resource	2.62	(0.12)	1.58	0.28	4.37	1.75	67	Improved economic outlook as result of an increase in gold price
	Reserve	0.69	(0.07)	0.25	(0.10)	0.76	0.07	11	Grade increase of 13% and favourable economics extended LOM by one year
TauTona	Resource	9.04	(0.33)	(0.56)	(1.01)	7.14	(1.90)	(21)	Transfers to Mponeng
	Reserve	4.61	(0.29)	–	(1.25)	3.08	(1.53)	(33)	TauTona 123-126 level ground transferred to Mponeng, reduction through changed mine design of scattered grid to bracket geological structure, lower value estimates due to increase sampling and drilling, slightly offset by higher MCF and inclusion of CLR Eastern block

Reconciliation of Mineral Resource and Ore Reserve (cont.)

as at 31 December 2008			Changes in gold contained							
Mine	Category	2007	Deple- tion ⁽¹⁾	Model change ⁽²⁾	Moz		2008	Net change		Comment
					Scope change ⁽³⁾			Diff	%	
Vaal River	Resource	5.10	(0.12)	0.13	(0.10)	5.02	(0.08)	(2)		
Surface (VRGO)	Reserve	1.92	(0.12)	0.02	0.09	1.91	(0.01)	(1)	Favourable economics	
West Wits	Resource	1.44	(0.01)	0.03	(0.10)	1.37	(0.07)	(5)		
Surface	Reserve	–	–	–	0.04	0.04	0.04	0		
South Africa	Resource	98.21	(2.97)	8.81	3.96	108.01	9.79	10		
Total	Reserve	33.88	(2.14)	1.17	0.74	33.66	(0.23)	(1)		

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.

2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.

3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.

URANIUM

AngloGold Ashanti produces a uranium oxide concentrate (U_3O_8) as a by-product from its South African gold mining operations. AngloGold Ashanti currently produces between 550 and 650 tonnes of U_3O_8 annually, with the potential to increase this to 1,000 tonnes by the year 2012.

Although mined as a by-product of gold for many years, U_3O_8 was not considered a Mineral Resource until the year 2005. Due to the rapid increase in the U_3O_8 price over the last few years, renewed focus has been placed on the U_3O_8 content within the Witwatersrand reefs with the result that in 2005, uranium was reported for the first time as a fully SAMREC compliant Mineral Resource.

The AngloGold Ashanti mines in the Vaal River region that currently produce uranium oxide as a by-product are Great Norigwa, Kopanang, and Moab Khotsonq. The uranium oxide is extracted from the VR, although Great Norigwa mine also produces some uranium oxide from the C Reef. The mines in the West Wits region that have uranium Mineral Resources are Mponeng, Savuka and TauTona and in this mining region the uranium is only present in the CLR.

The surface tailings storage facilities that have been classified as uranium resources are the Kopanang Pay dam and the tailings storage facilities in the West Wits region. Uraninite and brannerite are the most common uranium-bearing minerals, although uraniferous leucoxene and coffinite are also present. Uraninite was the original primary uranium-bearing mineral and was possibly introduced as detrital material during the deposition of the Witwatersrand sediments.

South Africa

cont.

Mineral Resource – Uranium (U ₃ O ₈)					
Mine/Project	Resource category	Tonnes million	Metric		Imperial
			Grade (kg/t)	Contained uranium oxide tonnes	Pounds millions
Great Noligwa	Measured	–	–	–	–
	Indicated	17.71	0.50	8,844	19.50
	Inferred	2.25	0.37	937	2.07
	Total	20.23	0.48	9,780	21.56
Kopanang	Measured	–	–	–	–
	Indicated	22.58	0.73	16,531	36.44
	Inferred	1.79	0.63	1,133	2.50
	Total	24.36	0.72	17,663	38.94
Moab Khotsong	Measured	2.64	0.75	1,982	4.37
	Indicated	22.62	0.76	17,235	38.00
	Inferred	12.44	0.63	7,864	17.34
	Total	37.70	0.72	27,081	59.70
Mponeng	Measured	–	–	–	–
	Indicated	27.08	0.19	5,130	11.31
	Inferred	18.65	0.19	3,453	7.61
	Total	45.72	0.19	8,583	18.92
Savuka	Measured	–	–	–	–
	Indicated	6.15	0.22	1,328	2.93
	Inferred	–	–	–	–
	Total	6.15	0.22	1,328	2.93
TauTona	Measured	–	–	–	–
	Indicated	8.81	0.30	2,602	5.74
	Inferred	–	–	–	–
	Total	8.81	0.30	2,602	5.74
Vaal River Surface	Measured	–	–	–	–
	Indicated	55.52	0.10	5,363	11.82
	Inferred	–	–	–	–
	Total	55.52	0.10	5,363	11.82
West Wits Surface	Measured	–	–	–	–
	Indicated	138.97	0.08	10,770	23.74
	Inferred	–	–	–	–
	Total	138.97	0.08	10,770	23.74
Total	Measured	2.64	0.75	1,982	4.37
	Indicated	299.44	0.23	67,801	149.48
	Inferred	35.39	0.38	13,386	29.51
	Total	337.47	0.25	83,169	183.36

Ore Reserve – Uranium (U₃O₈)

Mine/Project	Resource category	Tonnes million	Grade (kg/t)	Contained	Imperial
				uranium oxide tonnes	Pounds millions
Great Noligwa	Proved	–	–	–	–
	Probable	12.51	0.31	3,892	8.85
	Total	12.51	0.31	3,892	8.85
Kopanang	Proved	–	–	–	–
	Probable	9.41	0.36	3,432	7.57
	Total	9.41	0.36	3,432	7.57
Moab Khotsong	Proved	–	–	–	–
	Probable	25.28	0.47	11,877	26.18
	Total	25.28	0.47	11,877	26.18
Total	Proved	–	–	–	–
	Probable	47.21	0.41	19,201	42.33
	Total	47.21	0.41	19,201	42.33



South Africa

Great Nologwa



LOCATION

Great Nologwa is located about 15km south-east of the town of Orkney, in the southern part of the Klerksdorp goldfield. The mine exploits the VR at depths varying between 1,500m and 2,600m below surface. Scattered mining methods are employed where access to the reef is from the footwall haulage and return airway development, with cross-cuts developed every 180m to the reef horizon. Raises are then developed on-reef to the level above, and the reef is stoped out on-strike. The Great Nologwa lease area is constrained to the north by Pamodzi Gold Mine, to the east by Buffelsfontein Gold Mine, to the south by the Jersey and Die Hoek faults, (which displace the reef down by approximately 1,000m and 900m respectively), and to the west by Kopanang Mine.

GEOLOGY

The VR is the principal economic horizon at Great Nologwa, accounting for over 90% of the gold produced at the mine. The VR is part of the Witwatersrand Supergroup and is stratigraphically located near the middle of the Central Rand Group in the Johannesburg Subgroup on an unconformity below the Krugersdorp Formation. The VR unit can reach a maximum thickness of more than two metres and consists of a thin basal conglomerate (the C Facies) and a thicker sequence of upper conglomerates (the A Facies), separated by internal quartzite (the B Facies). Across most of the Great Nologwa lease area, the A Facies is the principal economic horizon within the VR, although sporadic remnants of C Facies may be preserved below the A Facies. The high gold values in the VR are often associated with high uranium values. Uranium is a very important by-product of Great Nologwa.

The C Reef has been mined on a limited scale in the central part of Great Nologwa, where a high-grade, north-south orientated channel containing two economic horizons has been exposed. To the east and west of this channel the C Reef is poorly developed with relatively small areas of economic interest. High uranium values in the C Reef are also often associated with high gold values. To the north, the C Reef sub-crops against the Gold Estates Conglomerates and in the extreme south of the mine the C Reef has been eliminated by a deeply eroded Kimberley Channel and the Jersey fault.

Mineral Resource

as at 31 December 2008

Great Noligwa	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Crystalkop Reef	Measured	0.82	7.96	6.51	0.21
	Indicated	6.87	9.13	62.74	2.02
	Inferred	1.65	8.20	13.52	0.44
	Total	9.34	8.86	82.76	2.66
Vaal Reef	Measured	6.64	14.20	94.23	3.03
	Indicated	3.39	14.71	49.84	1.60
	Inferred	0.87	12.61	10.98	0.35
	Total	10.89	14.23	155.06	4.99
Great Noligwa	Total	20.23	11.76	237.82	7.65


Exclusive Mineral Resource

as at 31 December 2008

Great Noligwa	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	2.46	12.87	31.67	1.02
	Indicated	6.10	9.69	59.10	1.90
	Inferred	2.52	9.73	24.50	0.79
Great Noligwa	Total	11.08	10.41	115.28	3.71

The shaft pillar and the C Reef form potential mineable areas. Approximately 14% of the Exclusive Mineral Resource is expected to be taken up in safety and remnant pillars ahead of current mining.


GM SECTION

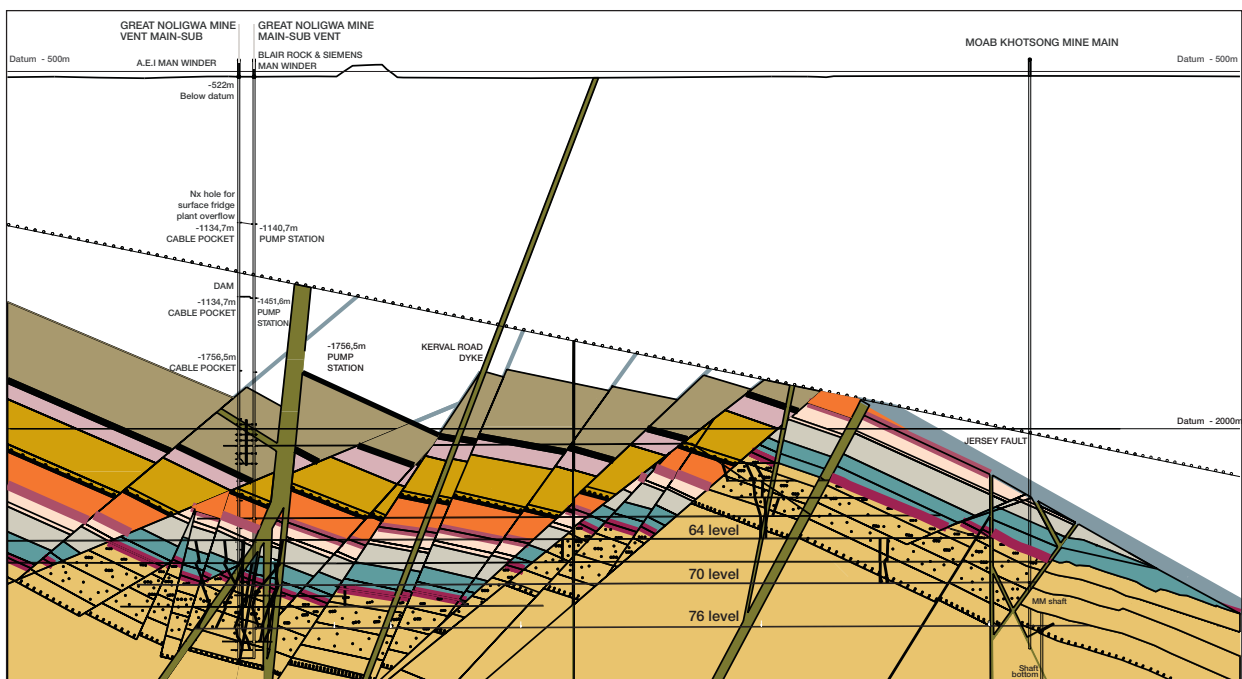


South Africa

Great Noligwa cont.

Great Noligwa: Mineral Resource reconciliation 2007 vs 2008

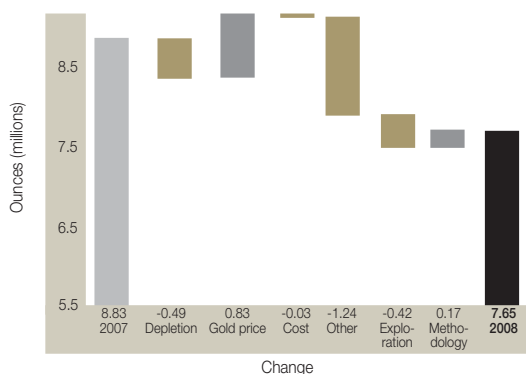

Great Noligwa: Ore Reserve reconciliation 2007 vs 2008

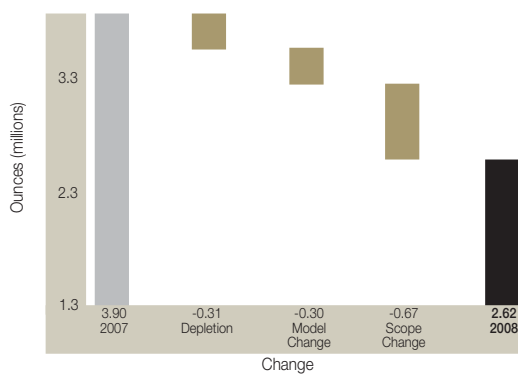


Ore Reserve

as at 31 December 2008

Great Noligwa	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Crystalkop Reef	Proved	0.72	5.97	4.32	0.14
	Probable	2.67	5.92	15.80	0.51
	Total	3.39	5.93	20.12	0.65
Vaal Reef	Proved	5.75	7.25	41.70	1.34
	Probable	2.57	7.71	19.83	0.64
	Total	8.33	7.39	61.53	1.98
Great Noligwa	Total	11.72	6.97	81.64	2.63

Great Noligwa – Underground (Metric)

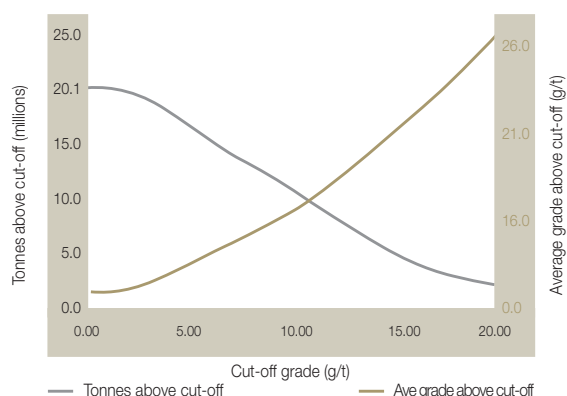

Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	F Putter	SACNASP	400052/95	25 years
Ore Reserve	A Kruger	PLATO	PMS0114	31 years

South Africa

Kopanang



LOCATION

Kopanang Mine is located on the farms Pretoriuskraal 53 and Grootdraai 468 in the Free State province, just south of the Vaal River and about 10km south-east of the town of Orkney, which is itself located about 170km south-west of Johannesburg. The mine, in production since 1984, was originally known as Vaal Reef's 9 Shaft and forms part of the Klerksdorp goldfield. The mine is located immediately south of the Vaal River, is bound to the south by the Jersey Fault and to the east by Great Nologwa Mine, and incorporates an area of 35km². Dolomites of the Transvaal Supergroup outcrop on surface and these result in a very subdued topography with few rock exposures being present.

GEOLOGY

Gold-bearing conglomerates of the Central Rand Group of the Witwatersrand are exploited, the most important of which is known as the VR. These conglomerates are exposed via a twin-shaft system that reaches a maximum depth of 2,340m. The VR is exploited at depths of between 1,300m and 2,600m below surface. On Kopanang, almost all of the gold produced is from the VR, although minor amounts of gold are extracted from the secondary C Reef, which is stratigraphically located about 250m above the VR.

The VR is a medium- to high-grade reef consisting of a basal conglomerate called the Stilfontein Reef and an overlying reef called the Upper Vaal. Current terminology separates the reef into A, B and C Facies, where the C Facies is the basal Stilfontein, the A Facies, the Upper Vaal, and the B Facies an internal layer of quartzite.

At Kopanang, the Upper VR, or A Facies, consists of a series of small pebble conglomerates and grits and contains very little gold. Further to the east at Great Nologwa, the A Facies becomes more robust and better developed and contains high gold values.

The B facies is simply a fine-grained grey, black speckled orthoquartzite that separates the A and C Facies.

The C Facies is the basal conglomerate of the VR and is the main gold carrier on Kopanang. It varies very little in thickness, with a thickness of 7-10cm being typical. The conglomerate comprises mostly quartz (92-98%) and chert (2-8%), with occasional porphyry clasts (<2%). The matrix is generally very pyritic and the base is non-channelised, and often contains a well-developed carbon seam.


South Africa

Kopanang *cont.*

The C Reef contains two economic conglomerates, although the lowermost conglomerate is only preserved as small remnants. Gold concentrations are typically associated with a carbon seam. The C Reef sub-crops in the north against the Gold Estates Conglomerates Formation. To the south of this unconformity, the reef can be eliminated by the Kimberley Channels or bedding parallel faulting.

The VR and C Reef generally dip towards the south-east at dips of between 10° and 20°.

Kopanang is situated in a structurally complicated area of the Witwatersrand Basin, which has been subjected to numerous tectonic events. The complexity of the faulting at Kopanang became evident during initial surface diamond borehole drilling. Prior to 1970, 12 surface boreholes had been drilled on the farm Pretoriuskraal 53 and only five of these intersected the VR, the rest had been faulted out. Approximately 20% of the ground in the mine lease area has been eliminated due to the presence of faulting. At least nine structural groups, of differing ages, are thought to be present on this mine. The interaction of different aged structures on the mine can be very complicated, and the relationship of different aged structures is further complicated as many of these faults appear to have been reactivated at latter stages, or may have been active over long periods of time. This time frame ranges from late Archaean to Cretaceous, and therefore involves some 2.7 billion years of structural deformation.

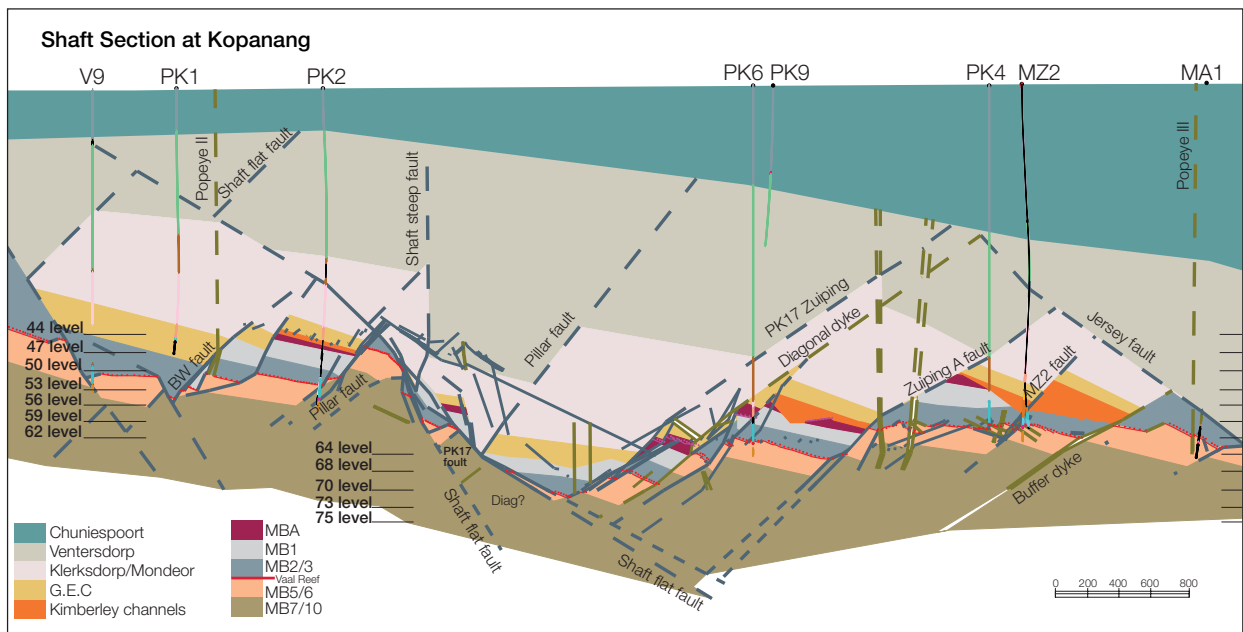

Mineral Resource

as at 31 December 2008

Kopanang	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Crystalkop Reef	Measured	0.11	10.74	1.20	0.04
	Indicated	0.31	12.58	3.89	0.13
	Inferred	0.99	13.28	13.10	0.42
	Total	1.41	12.93	18.19	0.59
VR Base	Measured	2.49	17.67	44.02	1.42
	Indicated	17.81	11.28	200.88	6.46
	Inferred	0.66	11.68	7.68	0.25
	Total	20.96	12.05	252.58	8.12
VR EDOM	Measured	0.19	14.53	2.71	0.09
	Indicated	1.67	12.06	20.12	0.65
	Inferred	0.14	10.06	1.45	0.05
	Total	2.00	12.15	24.28	0.78
Kopanang	Total	24.36	12.11	295.05	9.49


Exclusive Mineral Resource

as at 31 December 2008


Kopanang	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	1.66	19.76	32.88	1.06
	Indicated	4.82	12.06	58.11	1.87
	Inferred	1.79	12.43	22.24	0.71
Kopanang	Total	8.27	13.69	113.23	3.64

The VR in the western portion of the mine lease (Gencor 1E area) forms a potential mineable area. Approximately 44% of the exclusive Mineral Resource is expected to be taken up in safety and remnant pillars ahead of current mining.

Kopanang: Mineral Resource reconciliation 2007 vs 2008

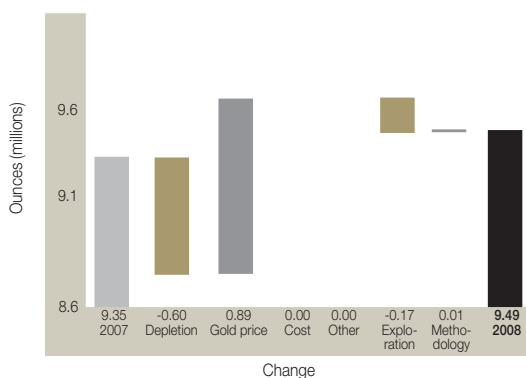

Kopanang: Ore Reserve reconciliation 2007 vs 2008

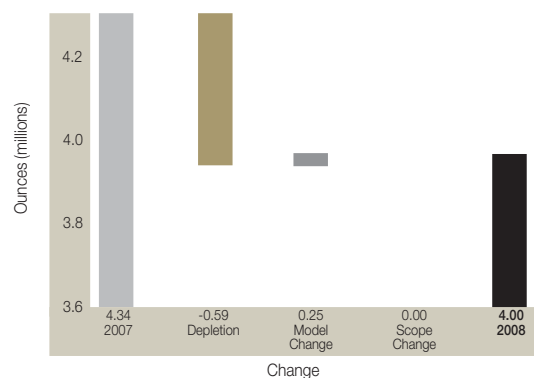

South Africa


Kopanang *cont.*

Ore Reserve

as at 31 December 2008

Kopanang	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Crystalkop Reef	Proved	0.01	4.51	0.05	–
	Probable	0.02	4.89	0.09	–
	Total	0.03	4.74	0.14	0.01
VR Base	Proved	0.98	9.42	9.25	0.30
	Probable	13.32	7.71	102.71	3.30
	Total	14.30	7.83	111.96	3.60
VR EDOM	Proved	0.13	7.58	1.00	0.03
	Probable	1.73	6.61	11.41	0.37
	Total	1.86	6.67	12.41	0.40
Kopanang	Total	16.19	7.69	124.51	4.00

Kopanang – Underground (Metric)

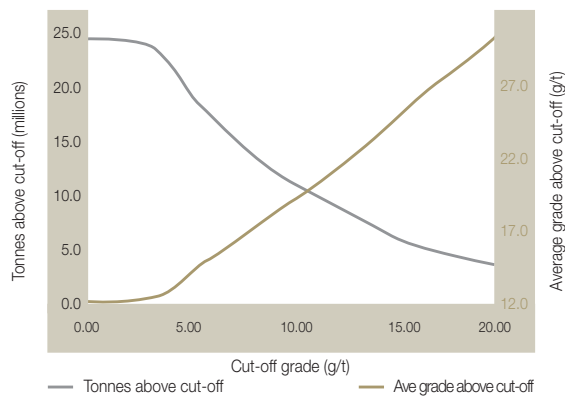


Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	A J Johnston	SACNASP	400055/01	20 years
Ore Reserve	W Kinnear	PLATO	PMS0198	18 years

South Africa

Moab Khotsong

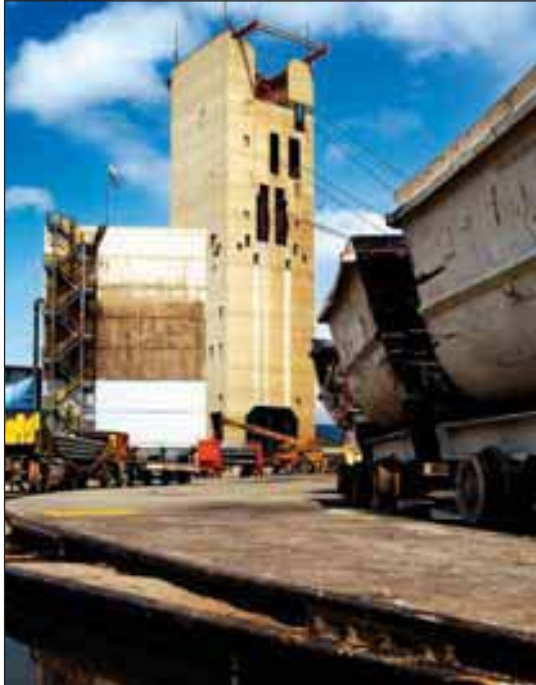

LOCATION

The Moab Project was approved in 1997 to exploit two distinct portions of the Moab Lease area, namely the Middle Mine (85 Level to 101 Level) and the Lower Mine (101 Level to 118 Level). During 2008, the SV4 section of Great Nologwa was incorporated into Moab Khotsong and this section is now termed the Top Mine.

The orebody of interest in the Moab Khotsong lease area is the VR, the principal reef in the Klerksdorp goldfield. The VR has been extensively mined on the adjacent Kopanang and Great Nologwa mines. Stratigraphically, it is located within the Johannesburg Subgroup of the Central Rand Group (Witwatersrand Supergroup). It is a thin (up to 4m thick), persistent stratigraphic unit that marks the base of the Strathmore Formation. Over much of the Klerksdorp mining area, the VR unconformably overlies the Mapaiskraal Member of the Stilfontein Formation (MB5). Towards the south of Kopanang and Great Nologwa, the VR oversteps onto the Mizpah Member.

GEOLOGY

The Mineral Resource at Moab Khotsong is structurally complex and highly faulted, with large fault-loss areas. Mining is based on a backfill system combined with bracket pillars. The raise lines are spaced 200m apart on the dip of the reef, with 25m-long panels. Backfill is carried to within four metres of the advancing stope faces and 75% of the total area extracted is likely to be backfilled.

The geological setting of Moab Khotsong is one of crystal extension, bounded in the north-west and south-east by major south-dipping fault systems with north-dipping Zuiping faults sandwiched between them. The Die Hoek and Buffels East faults structurally bound the reef blocks of the 'Moab Upper Mine' to the north-west and south-east respectively. The northern boundary is a Zuiping-type fault. The southern boundary fault of the 'Moab Upper Mine' is currently not defined.

South Africa

Moab Khotsong *cont.*

Due to the magnitude of throw across the Die Hoek fault, more than 700m down to the south, geological structures encountered on the up-thrown side of the fault cannot be projected to the down-thrown side and vice versa. No information pertaining to the reef blocks being accessed can be gleaned from the mapping of the access development. Only once the development is through the Die Hoek fault, does mapping thereof have any bearing on the reef blocks, and even then a great amount of exploration drilling is required to accurately delineate these blocks.

The C Reef is preserved in the northern part of the mine where the reef has been intersected by a number of boreholes. No development or stoping has taken place on the C Reef at Moab Khotsong.

Project Zaaipplaats 2

Project Zaaipplaats 2 (PZ2) is situated at Moab Khotsong in the Vaal River region of AngloGold Ashanti's South African operations. Moab Khotsong is the newest mine in the region and the PZ2 project is aimed at optimally extracting the deeper portion (lower mine) of the Vaal River at Moab Khotsong. The PZ2 project is planned to extend the life of Moab Khotsong for another 15 years until mid-2030s. The project also allows other opportunities (mining and metallurgical) to come to the fore that would otherwise have been uneconomic.

The orebody is accessed via twin double-declines angled at 8°, the upper and lower declines, from which five production levels will originate. These will allow two attacking points into the orebody, as well as providing sufficient ventilation capacity. One of the lower declines will be a dedicated ore-handling system via a conveyor belt; each of the decline sets will have a dedicated men (using chairlifts and a monorail) and material decline; the remaining upper decline will carry the majority of the services into the orebody. Shaft bottom will be 4,027m below datum (3,509m below collar).

Brownfields exploration

Brownfields exploration is currently focused on improving geological confidence in the Vaal River area and six surface drilling sites were in operation during the year.

Surface drilling continued in the Project Zaaipplaats area (Moab Lower Mine), where the target is the very prospective VR.

A long deflection to the east is in progress in drillhole MZA9. The deflection is intended to raise the confidence of an Inferred block in the north-east portion of the Zaaipplaats project area and also to confirm the structure between the Middle and Lower mines. The target block lies at an expected in-hole depth of 3,395 metres.

In the north-west of the main Zaaipplaats block, MMB5 is drilling to test a proposed target block along the Jersey Fault cut-off. By year end the current long deflection had reached a depth of 3,173 metres. The VR was not intersected due to faulting and it is planned to drill further deflections out of the original drillhole.

A new drillhole, MGR8, was started during the year and has currently penetrated to 1,596 metres in lavas and volcanoclastic sediments of the Kameeldoorns Formation of the Platberg Group (Ventersdorp Supergroup).

Two surface boreholes in the Moab North area continued drilling into 2008. The targets were proposed VR blocks in a poorly-defined, structurally complex area north of the Moab Middle Mine area.

Drillhole MCY5 was stopped at a depth of 3,130 metres. The VR was not intersected, but the geological information was used to revise and refine the structural model.

Re-opening of borehole MCY4 was aimed at proving a proposed block of VR just north of the Moab Upper Mine area. A faulted C Reef intersection was obtained at 2,823 metres, immediately adjacent to an intrusive. The drillhole was at a depth of 3,003m by year end and drilling is continuing.

Mineral Resource

as at 31 December 2008

Moab Khotsong	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
C Reef – GNM Shaft Pillar	Measured	0.02	8.85	0.17	0.01
	Indicated	0.46	13.05	6.00	0.19
	Inferred	0.13	11.67	1.56	0.05
	Total	0.61	12.61	7.72	0.25
C Reef – Middle Mine	Measured	–	–	–	–
	Indicated	1.21	9.62	11.61	0.37
	Inferred	2.52	7.96	20.02	0.64
	Total	3.72	8.50	31.63	1.02
VR – GNM Shaft Pillar	Measured	0.11	16.95	1.83	0.06
	Indicated	1.50	17.68	26.51	0.85
	Inferred	–	15.19	0.02	–
	Total	1.61	17.63	28.35	0.91
VR – Lower Mine	Measured	–	–	–	–
	Indicated	13.91	14.06	195.59	6.29
	Inferred	8.86	12.11	107.32	3.45
	Total	22.77	13.30	302.91	9.74
VR – Middle Mine	Measured	1.84	13.97	25.67	0.83
	Indicated	4.89	25.22	123.36	3.97
	Inferred	0.52	23.87	12.31	0.40
	Total	7.25	22.27	161.33	5.19
VR – Top Mine	Measured	0.81	21.60	17.40	0.56
	Indicated	0.54	24.11	13.00	0.42
	Inferred	0.41	12.00	4.96	0.16
	Total	1.76	20.12	35.35	1.14
Moab Khotsong	Total	37.72	15.04	567.30	18.24

Exclusive Mineral Resource

as at 31 December 2008

Moab Khotsong	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	0.91	21.70	19.83	0.64
	Indicated	5.21	20.72	107.92	3.47
	Inferred	12.44	11.75	146.18	4.70
Moab Khotsong	Total	18.56	14.76	273.92	8.81

The Exclusive Mineral Resource consists of designed rock engineering bracket pillars and the shaft pillars on the VR and C Reef. The major portion (59%) of this Exclusive Mineral Resource is situated in the Lower Mine area, with minor amounts in the Middle Mine (12%), C Reef (12%) and shaft pillar (13%) areas. The bracket pillars are designed for safety reasons and will therefore not be mined, whereas the shaft pillars can only be safely extracted at the end of the mine life.

Mineral Resource below infrastructure


as at 31 December 2008

Moab Khotsong	Category	Tonnes million	Grade g/t	Contained gold tonnes	Imperial Contained gold Moz
VR – Project Zaaipplaats 2 and Middle Mine	Total	15.37	17.41	267.64	8.61


South Africa

Moab Khotsong cont.

Moab Khotsong: Mineral Resource reconciliation 2007 vs 2008

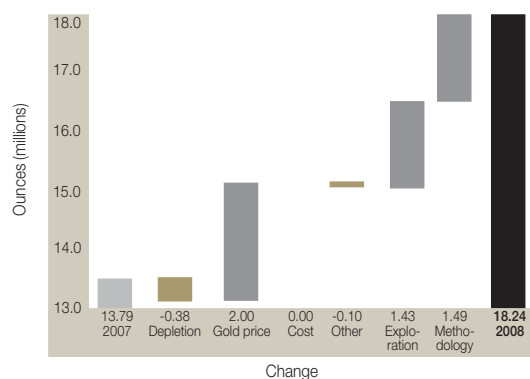

Moab Khotsong: Ore Reserve reconciliation 2007 vs 2008

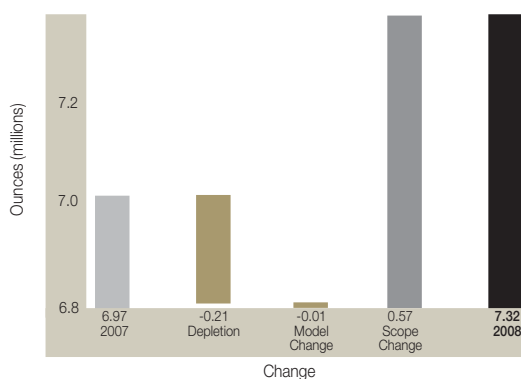

Ore Reserve

as at 31 December 2008


Moab Khotsong	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
VR – Lower Mine	Proved	–	–	–	–
	Probable	11.87	9.37	111.16	3.57
	Total	11.87	9.37	111.16	3.57
VR – Middle Mine	Proved	1.26	9.80	12.36	0.40
	Probable	6.44	13.83	89.10	2.87
	Total	7.70	13.17	101.46	3.26
VR – Top Mine	Proved	0.60	10.82	6.44	0.21
	Probable	0.82	10.68	8.75	0.28
	Total	1.41	10.74	15.19	0.49
Moab Khotsong	Total	20.99	10.86	227.81	7.32

Ore Reserve below infrastructure

as at 31 December 2008

Moab Khotsong	Category	Tonnes million	Metric	
			Grade g/t	Imperial Contained gold Moz
VR – Project Zaaipplaats 2	Total	11.87	9.37	3.57

Moab Khotsong – Underground (Metric)

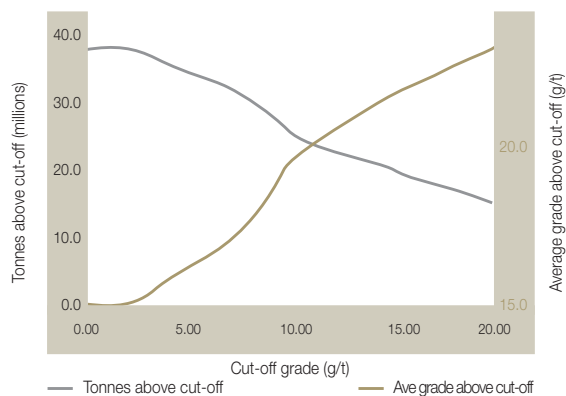

Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	T Adam	GSSA	5532	30 years
Ore Reserve	J Wall	PLATO	PMS0164	26 years



South Africa

Tau Lekoa



LOCATION

Tau Lekoa is located about 8km west of the town of Orkney, at the western extreme of the Klerksdorp goldfields. The mine exploits the VCR at depths varying between 900m and 1,700m below surface. The VCR, the only reef exploited at Tau Lekoa, dips towards the west at an average angle of 30°. Tau Lekoa has a twin shaft system and mines to a depth of 1,650m. Tau Lekoa uses hydropower which has a centralised electro-hydraulic system as its primary source of energy production. Hydropower has been instrumental in improving labour productivity, which has played a vital role in assisting the mine to achieve its business objectives.

GEOLOGY

The VCR is a gold-bearing quartz pebble conglomerate (up to 5m thick) capping the uppermost angular unconformity of the Witwatersrand Supergroup. The topography of the VCR depositional area is uneven, and consists of a series of slopes and horizontal terraces at different elevations. The VCR is deposited over a number of terraces that are separated by slope material. Typically the terrace reef is a thicker, more robust conglomerate unit than the slope material, where hangingwall-footwall conditions may occur. The deepest terraces are the youngest, whereas the oldest terrace occupies a topographical horizon 28m above the youngest terrace. Generally the younger the terrace, the more mature the channel fill. The main channel is the youngest, most mature VCR facies at Tau Lekoa, and extends from the north-east into Tau Lekoa, before turning sharply towards the west. The older middle and upper terraces contain more immature conglomerates with more erratic gold grades.

New lease area

The Goedgenoeg Lease Area is situated to the north-west of Tau Lekoa. The mineral rights were allowed to lapse in 2004, however, due to improvements in the gold price, AngloGold Ashanti re-applied for prospecting rights during 2008.

This area lies below the current mine infrastructure and does not currently form part of the Mineral Resource.

Mineral Resource

as at 31 December 2008

Tau Leko	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
VCR Base	Measured	2.70	6.69	18.06	0.58
	Indicated	4.19	5.50	23.07	0.13
	Inferred	3.07	5.62	17.24	0.55
	Total	9.96	5.86	58.37	1.88
VCR Jonkerskraal	Measured	0.70	5.97	4.16	0.13
	Indicated	5.90	4.88	28.80	0.93
	Inferred	0.01	2.79	0.04	–
	Total	6.61	4.99	33.00	1.06
VCR Weltevreden	Measured	0.02	4.71	0.08	–
	Indicated	17.35	4.17	72.35	2.33
	Inferred	0.23	5.79	1.32	0.04
	Total	17.60	4.19	73.76	2.37
Tau Leko	Total	34.18	4.83	165.13	5.31


Exclusive Mineral Resource

as at 31 December 2008


Tau Leko	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	2.39	6.86	16.36	0.53
	Indicated	22.73	4.23	96.18	3.09
	Inferred	3.31	5.62	18.60	0.60
Tau Leko	Total	28.42	4.61	131.13	4.22

The Exclusive Mineral Resource is sensitive to the gold price and a large portion of this Mineral Resource is due to the difference in Mineral Resource and Ore Reserve gold prices. Approximately 33% of the Exclusive Mineral Resource is expected to occur in safety and remnant pillars ahead of current mining.

Tau Leko: Mineral Resource reconciliation
2007 vs 2008

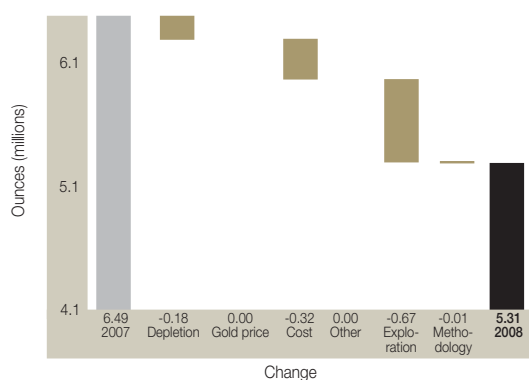

Tau Leko: Ore Reserve reconciliation
2007 vs 2008

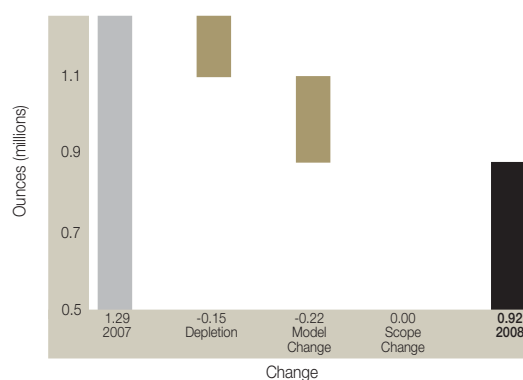

South Africa


Tau Lekoia cont.

Ore Reserve

as at 31 December 2008

Tau Lekoia	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
VCR Base	Proved	0.95	3.70	3.50	0.11
	Probable	2.42	4.24	10.29	0.33
	Total	3.37	4.09	13.79	0.44
VCR Jonkerskraal	Proved	0.38	4.01	1.52	0.05
	Probable	3.64	3.67	13.35	0.43
	Total	4.02	3.70	14.87	0.48
Tau Lekoia	Total	7.39	3.88	28.66	0.92

Tau Lekoia – Underground (Metric)

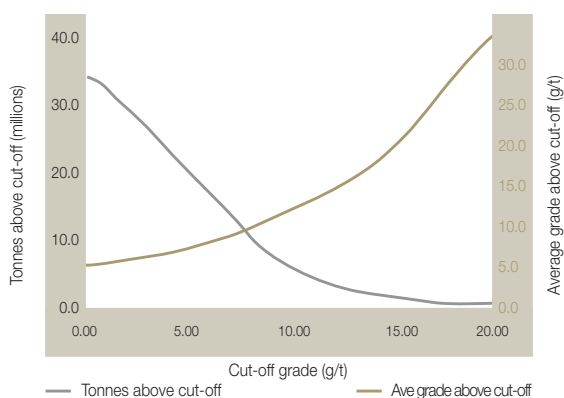

Competent persons

Type	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	F Fouche	GSSA	962596	14 years
Ore Reserve	R Brokken	PLATO	PMS0171	27 years

South Africa

Mponeng



LOCATION

Mponeng lies on the West Wits Line, close to Carletonville in the province of Gauteng, about 65km south-west of Johannesburg. Mining at Mponeng is conducted at an average depth of 2,800m. The mine operates two vertical hoisting shafts, a sub-shaft and two service shafts. The Mponeng lease area is constrained to the north by TauTona and Savuka, and to the south only by the depth of the orebody, which is open-ended.

GEOLOGY

The VCR, the only reef currently being mined at Mponeng, comprises a quartz pebble conglomerate (up to 3m thick) capping the topmost angular unconformity of the Witwatersrand Supergroup. The footwall stratigraphy partially controls the reef type. Most of the VCR mined lies on footwall strata of the Kimberley Formation, which is relatively argillaceous. More durable quartzites of the Elsberg Formation lie to the west, while the eastern side of the mine is dominated by the Booyens Shale.

Mponeng is also planning to mine the CLR. The CLR at Mponeng is on average a 20cm thick, tabular, auriferous quartz pebble conglomerate formed near the base of the Central Rand Group. The CLR is on average 900m deeper than the VCR and an exploration drilling programme is currently underway to improve resource confidence and confirm the geological structures that occur at the lower levels. Of the three economic units that exist within the CLR, the Mponeng CLR target area is dominated by Unit 3 with a smaller portion of Unit 2 towards the east. Unit 2 is a complex channel deposit, and Unit 3 is the oldest of the CLR channel deposits sitting at the base of the package.

Mponeng Carbon Leader Reef Project

Two economically viable reefs are mined in the West Wits area, the shallower VCR and the deeper CLR. Both have been extensively mined at AngloGold Ashanti's TauTona and Savuka operations, while Mponeng has only mined the VCR. Both reefs can be accessed down to 120 level (3,645m below datum), but there is currently no infrastructure in place that can service stoping operations below 120 level.

Mponeng is in a prime position to exploit the CLR, and had in fact originally been designed with this in mind via its sub-shaft deepening project which began in the mid-1990s. Due to economic factors at the time, this sub-shaft was stopped at 120 level in 2000 and is now being used to service the VCR mining operations.

South Africa

Mponeng *cont.*

The high-grade CLR below 120 level has remained inaccessible and this represents an enormous opportunity for Mponeng and for AngloGold Ashanti. A project team has been set up to design a “new mine” to access the CLR via tertiary shafts from Mponeng, enabling the mine to extend its life, while maintaining production at current levels.

The mine has been designed according to the sequential grid mining method, a technique developed at Elandsrand and Mponeng in the 1990s. This method involves pre-developing stoping grids and extracting the reef between the dip-stabilising pillars. This method has proved successful in the management of seismicity, both in reducing seismic energy and increasing mining flexibility. The shafts and infrastructure have been designed to fit the existing shaft system at Mponeng, and have the capacity to sustain high levels of production.

The extension of Mponeng via the CLR Project provides a strong base from which several regional benefits can be realised, as well as enabling other smaller projects to be brought in to match the extended life of the asset and region.

Mineral Resource					
as at 31 December 2008					
Mponeng	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
CLR Below 120 Level	Measured	–	–	–	–
	Indicated	25.57	18.88	482.69	15.52
	Inferred	18.65	16.65	310.52	9.98
	Total	44.22	17.94	793.21	25.50
Mponeng WUDL	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	4.47	13.33	59.61	1.92
	Total	4.47	13.33	59.61	1.92
TauTona CLR Shaft Pillar	Measured	0.27	38.48	10.52	0.34
	Indicated	1.23	43.20	53.33	1.72
	Inferred	–	–	–	–
	Total	1.51	42.34	63.85	2.05
TauTona VCR Shaft Pillar	Measured	0.13	14.49	1.86	0.06
	Indicated	1.38	19.36	26.74	0.86
	Inferred	–	–	–	–
	Total	1.51	18.95	28.60	0.92
VCR 109 to 120 level	Measured	1.61	19.36	31.07	1.00
	Indicated	7.91	16.51	130.51	4.20
	Inferred	–	–	–	–
	Total	9.51	16.99	161.58	5.20
VCR Above 109 Level	Measured	5.22	11.13	58.09	1.87
	Indicated	12.11	8.00	96.95	3.12
	Inferred	–	–	–	–
	Total	17.33	8.94	155.05	4.99
VCR Below 120 level	Measured	0.01	22.52	0.32	0.01
	Indicated	8.63	17.55	151.43	4.87
	Inferred	–	–	–	–
	Total	8.64	17.56	151.75	4.88
VCR Block 1	Measured	–	–	–	–
	Indicated	2.99	4.42	13.24	0.43
	Inferred	–	–	–	–
	Total	2.99	4.42	13.24	0.43

Mineral Resource (cont.)

as at 31 December 2008

Mine/Project	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
VCR Block 3	Measured	–	–	–	–
	Indicated	7.13	4.28	30.53	0.98
	Inferred	–	–	–	–
	Total	7.13	4.28	30.53	0.98
VCR Block 5	Measured	0.01	1.78	0.02	–
	Indicated	6.04	6.77	40.92	1.32
	Inferred	–	–	–	–
	Total	6.05	6.76	40.94	1.32
VCR Outside Project areas	Measured	0.01	2.00	0.02	–
	Indicated	9.91	3.94	39.03	1.26
	Inferred	–	–	–	–
	Total	9.92	3.94	39.05	1.26
Mponeng	Total	113.29	13.57	1537.41	49.43

Exclusive Mineral Resource

as at 31 December 2008

Mponeng	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	5.57	13.79	76.76	2.47
	Indicated	68.59	12.82	879.29	28.27
	Inferred	23.12	16.01	370.14	11.90
Mponeng	Total	97.28	13.63	1,326.18	42.64

The CLR in the deeper portion of the orebody (below 126 level) and the VCR in the north of the mine lease are potentially mineable areas. Approximately 35 to 50% of the Exclusive Mineral Resource is expected to occur in safety and remnant pillars ahead of current mining.

Mineral Resource below infrastructure


as at 31 December 2008

Mponeng	Category	Metric Tonnes million	Grade g/t	Contained gold tonnes	Imperial Contained gold Moz
VCR below 120 level	Total	8.64	17.56	151.75	4.88
CLR below 120 level	Total	45.72	18.74	857.06	27.56
WUDLS	Total	4.47	13.33	59.61	1.92
Mponeng	Total	58.84	18.16	1,068.43	34.35


South Africa

Mponeng cont.

Mponeng: Mineral Resource reconciliation
2007 vs 2008

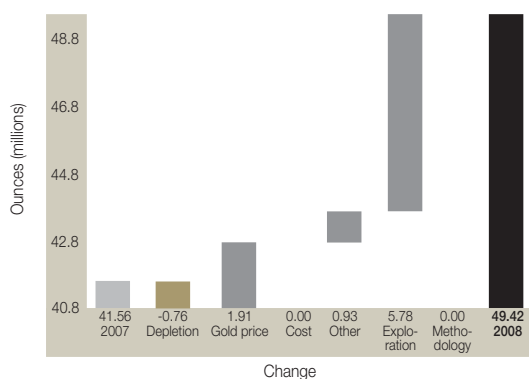

Mponeng: Ore Reserve reconciliation
2007 vs 2008

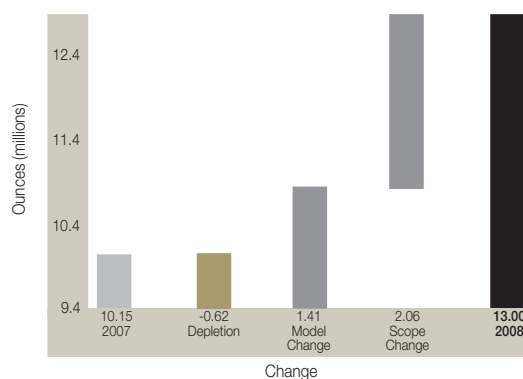

Ore Reserve

as at 31 December 2008


Mponeng	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
CLR Below 120 Level	Proved	–	–	–	–
	Probable	14.78	14.46	213.77	6.87
	Total	14.78	14.46	213.77	6.87
VCR 109 to 120 Level	Proved	0.88	11.02	9.67	0.31
	Probable	7.48	8.72	65.25	2.10
	Total	8.36	8.96	74.92	2.41
VCR Above 109 Level	Proved	1.58	8.11	12.80	0.41
	Probable	5.37	4.80	25.76	0.83
	Total	6.94	5.55	38.56	1.24
VCR Below 120 Level	Proved	0.01	12.50	0.19	0.01
	Probable	7.69	9.97	76.71	2.47
	Total	7.71	9.98	76.90	2.47
Mponeng	Total	37.80	10.69	404.15	12.99

Ore Reserve below infrastructure

as at 31 December 2008

Mponeng	Category	Metric		Contained gold tonnes	Imperial Contained gold Moz
		Tonnes million	Grade g/t		
VCR below 120 level	Total	7.71	9.98	76.90	2.47
CLR below 120 level	Total	14.78	14.46	213.77	6.87
Mponeng	Total	22.49	12.92	290.67	9.35

Mponeng – Underground (Metric)

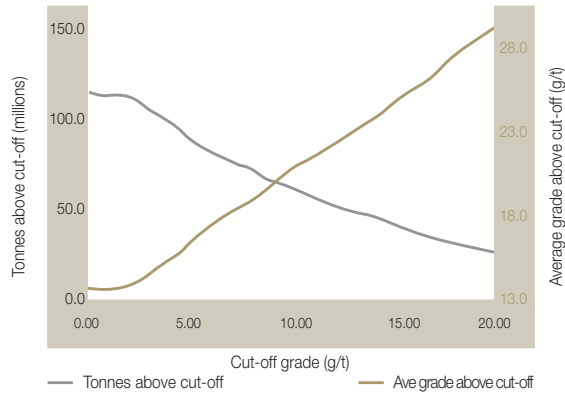

Competent person

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	G Flitton	GSSA	964758	7 years
Ore Reserve	P Enslin	PLATO	PMS0183	25 years



South Africa

Savuka



LOCATION

The Savuka mine is located about 18km south of the town of Carletonville, in the West Wits goldfields. The mine exploits the CLR at depths varying between 2,600m and 3,500m below surface. The VCR, which on average is about 700m above the CLR, is also exploited at Savuka, but to a lesser extent than the CLR. A combination of mining methods is used: longwall, conventional and sequential grid mining.

GEOLOGY

The CLR is a thin, on average 20cm thick, tabular, auriferous quartz pebble conglomerate formed near the base of the Central Rand Group. The CLR has been divided into three stratigraphic units. Economically the most important is Unit 1 which is present as a sheet-like deposit over the whole mine. Unit 2 is a complex channel deposit that is presently only being mined along the south and west at Savuka. The reef may be over 2m thick where Unit 2 is developed. Unit 3 is preserved below Unit 1 in the southern parts of Savuka and is the oldest of the CLR conglomerates.

The VCR comprises a quartz pebble conglomerate (up to 5m thick) capping the topmost angular unconformity of the Witwatersrand Supergroup. The topography of the VCR depositional area is uneven, and consists of a series of slopes and horizontal terraces at different elevations. It sub-outcrops against the base of the Ventersdorp Lavas in a direction parallel to strike across the north-western part of the lease area.

Faulting of the orebody, in conjunction with the numerous intrusives that also intersect the orebody on the various levels, is responsible for most of the risk inherent with this type of deep-level gold mining. The Geoscience Department ensures that all information regarding these features is gathered ahead of the current workings so as to ensure the safe planning of the operation. Maximum levels of effort are spent on ensuring the accuracy and validity of the data.

Mineral Resource

as at 31 December 2008

Savuka	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Carbon Leader Reef	Measured	0.54	16.98	9.13	0.29
	Indicated	5.61	21.07	118.24	3.80
	Inferred	–	–	–	–
	Total	6.15	20.71	127.38	4.10
Ventersdorp Contact Reef	Measured	0.42	6.74	2.85	0.09
	Indicated	0.40	14.25	5.66	0.18
	Inferred	–	–	–	–
	Total	0.82	10.38	8.51	0.27
Savuka	Total	6.97	19.50	135.89	4.37


Exclusive Mineral Resource

as at 31 December 2008


Savuka	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	0.93	12.26	11.41	0.37
	Indicated	3.92	22.13	86.66	2.79
	Inferred	–	–	–	–
Savuka	Total	4.85	20.23	98.07	3.15

The Exclusive Mineral Resource is sensitive to the gold price and a large portion of this Mineral Resource is due to the difference in Mineral Resource and Ore Reserve gold prices. Approximately 46% of the Exclusive Mineral Resource is expected to occur in safety and remnant pillars ahead of current mining.

Savuka: Mineral Resource reconciliation 2007 vs 2008

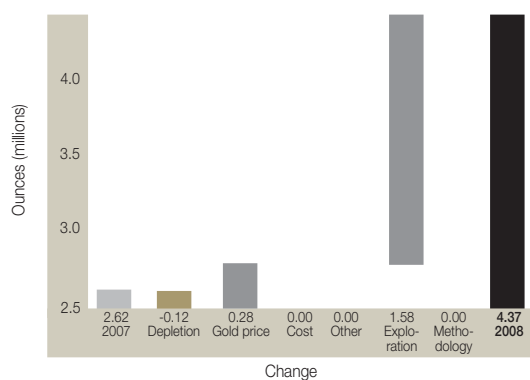

Savuka: Ore Reserve reconciliation 2007 vs 2008

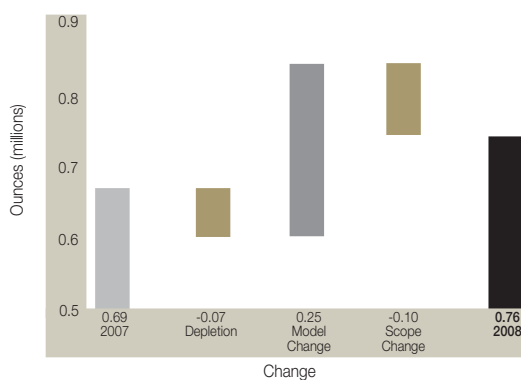

South Africa


Savuka cont.

Ore Reserve

as at 31 December 2008

Savuka	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Carbon Leader Reef	Proved	0.05	7.29	0.34	0.01
	Probable	3.49	6.64	23.20	0.75
	Total	3.54	6.65	23.54	0.76
Ventersdrop Contact Reef	Proved	0.01	2.17	0.02	–
	Probable	0.05	3.27	0.15	0.01
	Total	0.06	3.06	0.18	0.01
Savuka	Total	3.60	6.59	23.71	0.76

Savuka – Underground (Metric)

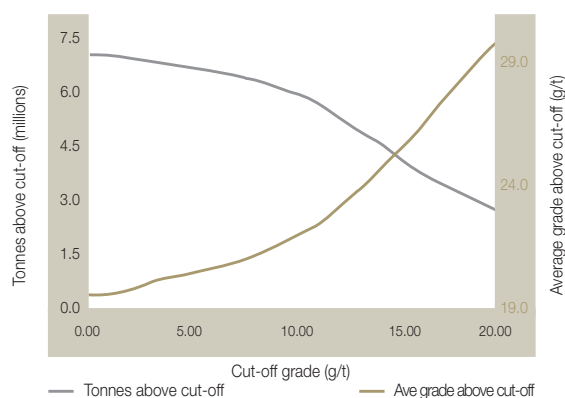


Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	G Flitton	GSSA	964758	7 years
Ore Reserve	P Enslin	PLATO	PMS0183	25 years

South Africa

TauTona

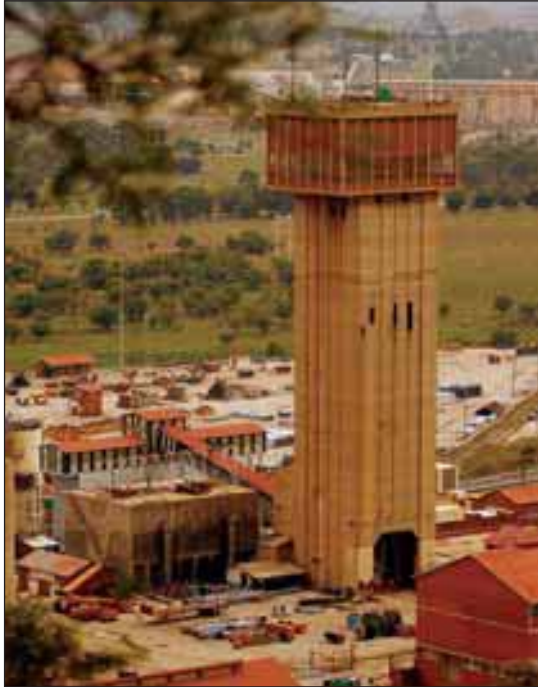

LOCATION

TauTona lies on the West Wits Line, just south of Carletonville in the North West Province, about 70km south-west of Johannesburg. Mining at TauTona takes place at depths ranging from 2,000m to 3,640m. The mine has a three-shaft system and is in the process of converting from longwall mining to scattered grid mining.


GEOLOGY

The CLR is a thin, on average 20cm thick, tabular, auriferous quartz pebble conglomerate formed near the base of the Central Rand Group. The CLR has been divided into three facies units. Economically the most important is Unit 1, which is present as a sheet-like deposit over the whole mine, although reef development and grades tend to drop off very rapidly where Unit 1 overlies Unit 2. Unit 2 is a complex channel deposit that is only present along the eastern-most limit of current mining at TauTona. The Unit 2 CLR may be over 2m thick. Unit 3 is preserved below Unit 1 in the southern parts of TauTona and is the oldest of the CLR conglomerates.

Production levels on the VCR at TauTona are currently limited, amounting to an average of 10% of total production volumes. The VCR comprises a quartz pebble conglomerate (up to 2m thick) capping the top-most angular unconformity of the Witwatersrand Supergroup. The topography of the VCR depositional area is uneven, and consists of a series of slopes and horizontal terraces at different elevations.

South Africa

TauTona cont.

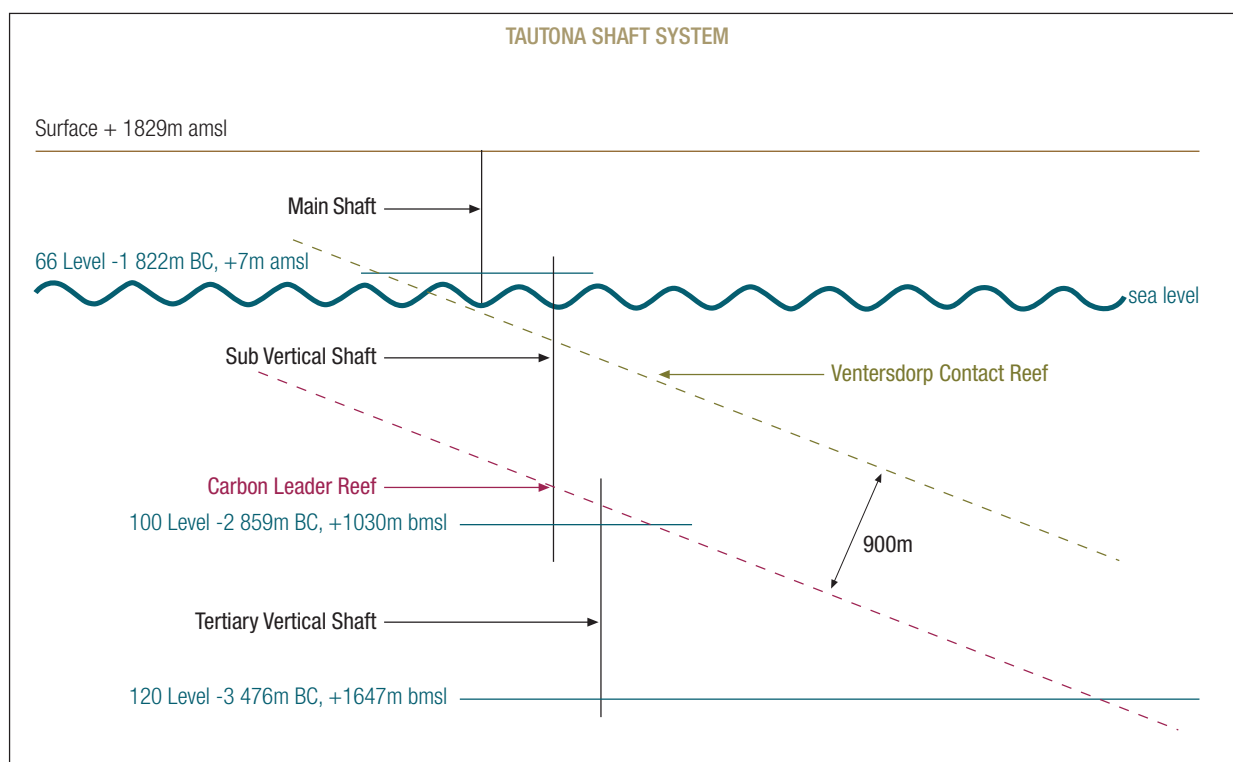

Mineral Resource

as at 31 December 2008

TauTona	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
CLR Base	Measured	0.68	26.20	17.82	0.57
	Indicated	7.52	23.50	176.69	5.68
	Inferred	–	–	–	–
	Total	8.20	23.73	194.51	6.25
CLR Below 120	Measured	0.04	22.97	0.82	0.03
	Indicated	0.49	33.87	16.66	0.54
	Inferred	–	–	–	–
	Total	0.53	33.13	17.48	0.56
Remnant CLR Shaft Pillar	Measured	0.06	34.74	1.92	0.06
	Indicated	0.03	41.91	1.32	0.04
	Inferred	–	–	–	–
	Total	0.09	37.34	3.24	0.10
VCR Shaft Pillar	Measured	0.13	15.62	2.08	0.07
	Indicated	0.24	20.14	4.90	0.16
	Inferred	–	–	–	–
	Total	0.38	18.54	6.98	0.22
TauTona	Total	9.19	24.18	222.22	7.14

Exclusive Mineral Resource

as at 31 December 2008

TauTona	Category	Tonnes million	Grade g/t	Contained	
				gold tonnes	gold Moz
	Measured	0.70	24.17	16.89	0.54
	Indicated	3.68	23.76	87.44	2.81
	Inferred	-	-	-	-
TauTona	Total	4.38	23.82	104.34	3.35


The Exclusive Mineral Resource is dependant on mining strategy, but approximately 3.0Moz or 92% of the Exclusive Mineral Resource is expected to be taken up in safety and remnant pillars ahead of current mining.

Mineral Resource below infrastructure


as at 31 December 2008

TauTona	Category	Tonnes million	Metric Grade g/t	Imperial	
				Contained gold tonnes	Contained gold Moz
CLR below 120 level	Total	0.53	33.13	17.48	0.56

TauTona: Mineral Resource reconciliation
2007 vs 2008

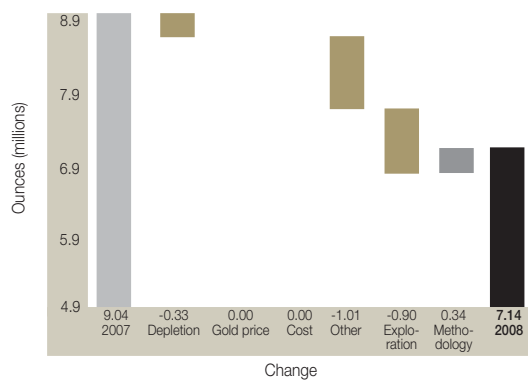

TauTona: Ore Reserve reconciliation
2007 vs 2008

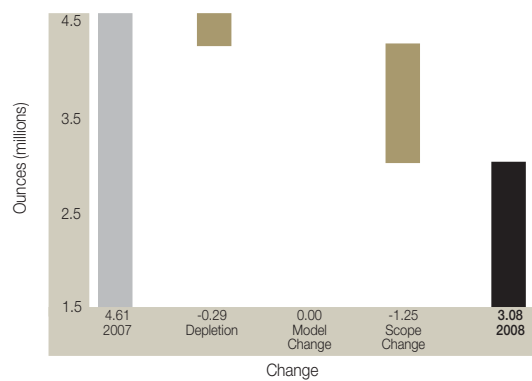

South Africa

TauTona cont.

Ore Reserve

as at 31 December 2008


TauTona	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
CLR Base	Proved	0.33	10.10	3.34	0.11
	Probable	8.56	8.99	76.88	2.47
	Total	8.89	9.03	80.23	2.58
CLR Below 120	Proved	–	10.54	0.03	–
	Probable	0.63	15.89	9.97	0.32
	Total	0.63	15.87	10.00	0.32
Remnant CLR Shaft Pillar	Proved	–	10.55	0.04	–
	Probable	–	–	–	–
	Total	–	10.55	0.04	–
VCR Shaft Pillar	Proved	0.07	8.02	0.57	0.02
	Probable	0.51	9.62	4.87	0.16
	Total	0.58	9.43	5.44	0.18
TauTona	Total	10.10	9.48	95.70	3.08

Ore Reserve below infrastructure

as at 31 December 2008

TauTona	Category	Tonnes million	Metric Grade g/t	Contained gold tonnes	Imperial Contained gold Moz
CLR below 120 level	Total	0.63	15.87	10.00	0.32

TauTona – Underground (Metric)

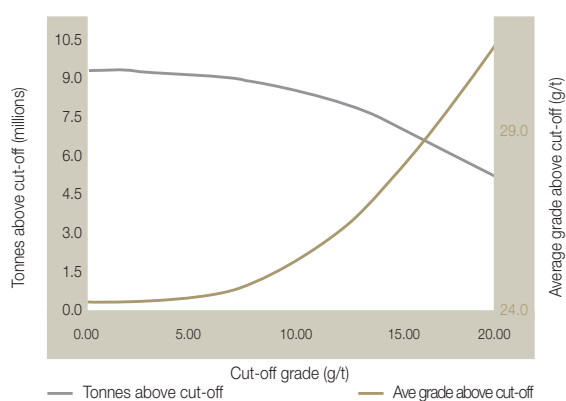

Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	R Burnett	SACNASP	400133/03	23 years
Ore Reserve	M W Armstrong	PLATO	PMS0054	24 years

South Africa

Surface operations



Metallurgy as a business unit produces gold in addition to that derived from the primary reef sources by treating lower-grade surface sources of gold-bearing material. The strategy is the maximum utilisation of the treatment gap.

The surface source operations comprise the Vaal River and West Wits surface sources operations.

The Vaal River Surface Operations are located immediately to the north and south of the Vaal River, close to the town of Orkney, North West Province, South Africa. These operations comprise waste rock dumps and tailings dams resulting from the mining and processing of the VR and VCR which are mined at the Vaal River underground mines in the Klerksdorp area.

The West Wits Surface Operations are located on the West Wits Line, near the town of Carletonville, straddling the border between the North West Province and Gauteng, South Africa. These operations comprise waste rock dumps and tailings dams sourced from the mining and processing of CLR and VCR which are mined at the West Wits underground mines in the Carletonville/Fochville area.

The waste rock dumps have been built from waste rock mined from underground access development workings, which was hoisted and transported and deposited via conveyor belt. The gold contained within these rock dumps was sourced from three areas:

- minor reefs that were developed in order to access the primary reef;
- reefs that were contained within small fault blocks that were exposed by off-reef development; and
- cross-tramming of reef to the waste tips.

The tailings storage facilities store the residue product from the gold plants. These tailings were pumped in a slurry form onto tailings dams and have been built up over a period of years.

RECLAMATION METHODOLOGY

Bulldozers are used to create furrows through the waste rock dumps in order to mix rock from different parts of the waste rock dumps that were deposited over different time periods. This is an attempt to create a degree of homogenisation. The material is then loaded onto rail hoppers by means of a front end loader and transported to the metallurgical plants.

South Africa

Surface operations *cont.*

The West Gold Plant, Kopanang Gold Plant, Nologwa Gold Plant, Mispah Gold Plant and Savuka Gold Plant are fed from the waste rock dumps (WRD). Currently WRD 2, WRD 4 and Nologwa WRD are being reclaimed in the Vaal River area, while the Savuka WRD is being reclaimed in the West Wits area.


The Sulphur Paydam (SPD) is being reclaimed by means of remote controlled high-pressure hydraulic monitors. In order to facilitate blending of low and higher grade material (necessitated by a definite grade gradient that exists from the bottom to the top of the tailings dam), reclamation takes place in a three-bench, full-face operation. From the reclamation face, the slurry flows via trenches to the SPD pump station, where oversized material is screened out and then pumped to the East Gold and Acid Flotation (EGAF) Plant for processing.

Mineral Resource					
as at 31 December 2008					
Mine/Project	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Vaal River Surface					
SA Met - Rock Dump	Measured	–	–	–	–
	Indicated	63.57	0.62	39.33	1.27
	Inferred	5.02	0.69	3.45	0.11
	Total	68.59	0.62	42.79	1.38
SA Met - Tailings Dump	Measured	–	–	–	–
	Indicated	355.03	0.32	113.36	3.65
	Inferred	–	–	–	–
	Total	355.03	0.32	113.36	3.65
Vaal River Surface	Total	423.62	0.37	156.15	5.02
West Wits Surface					
WWGO - Rock Dump	Measured	–	–	–	–
	Indicated	5.09	0.27	1.35	0.04
	Inferred	8.16	0.61	4.96	0.16
	Total	13.25	0.48	6.31	0.20
WWGO - Tailings Dump	Measured	–	–	–	–
	Indicated	138.97	0.26	36.16	1.16
	Inferred	–	–	–	–
	Total	138.97	0.26	36.16	1.16
West Wits Surface	Total	152.22	0.28	42.47	1.37
Surface operations	Total	575.84	0.35	198.62	6.18


Exclusive Mineral Resource					
as at 31 December 2008					
Mine/Project	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Vaal River Surface	Measured	–	–	–	–
	Indicated	302.65	0.31	93.32	3.00
	Inferred	5.02	0.69	3.45	0.11
	Total	307.67	0.31	96.77	3.11
West Wits Surface	Measured	–	–	–	–
	Indicated	138.97	0.26	36.16	1.16
	Inferred	8.16	0.61	4.96	0.16
	Total	147.13	0.28	41.12	1.32
Surface operations	Total	454.79	0.30	137.89	4.43

The Exclusive Mineral Resource largely comprises tailings storage facilities.


Vaal River Surface: Mineral Resource reconciliation 2007 vs 2008

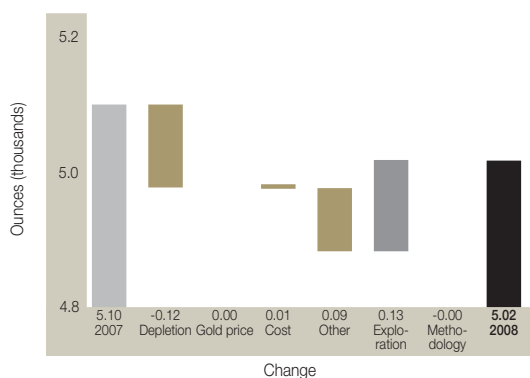


Vaal River Surface: Ore Reserve reconciliation 2007 vs 2008

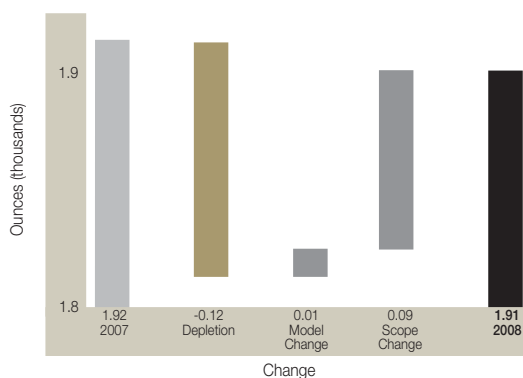

West Wits Surface: Mineral Resource reconciliation 2007 vs 2008

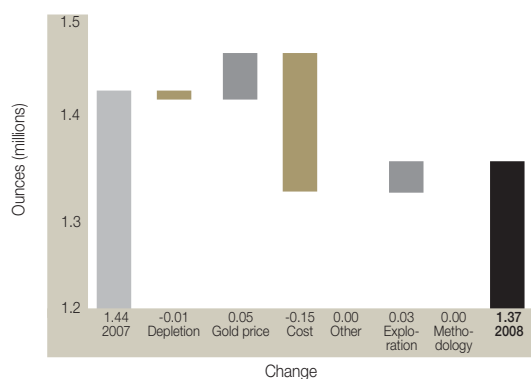

West Wits Surface: Ore Reserve reconciliation 2007 vs 2008

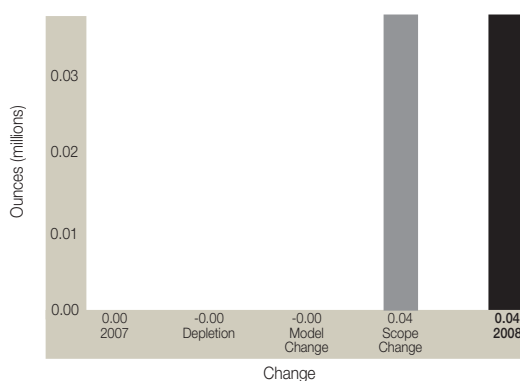

Ore Reserve

as at 31 December 2008

Mine/Project	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Vaal River Surface					
SA Met - Rock Dump	Proved	–	–	–	–
	Probable	63.57	0.62	39.33	1.27
	Total	63.57	0.62	39.33	1.27
SA Met - Tailings Dump	Proved	–	–	–	–
	Probable	52.38	0.38	20.04	0.64
	Total	52.38	0.38	20.04	0.64
Vaal River Surface	Total	115.95	0.51	59.38	1.91
West Wits Surface					
WWGO - Rock Dump	Proved	–	–	–	–
	Probable	5.09	0.27	1.35	0.04
	Total	5.09	0.27	1.35	0.04
West Wits Surface	Total	5.09	0.27	1.35	0.04

South Africa

Surface operations *cont.*


Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	T Flitton	GSSA	964771	7 years
Ore Reserve	R Brokken	PLATO	PMS0171	27 years



Argentina

Regional overview

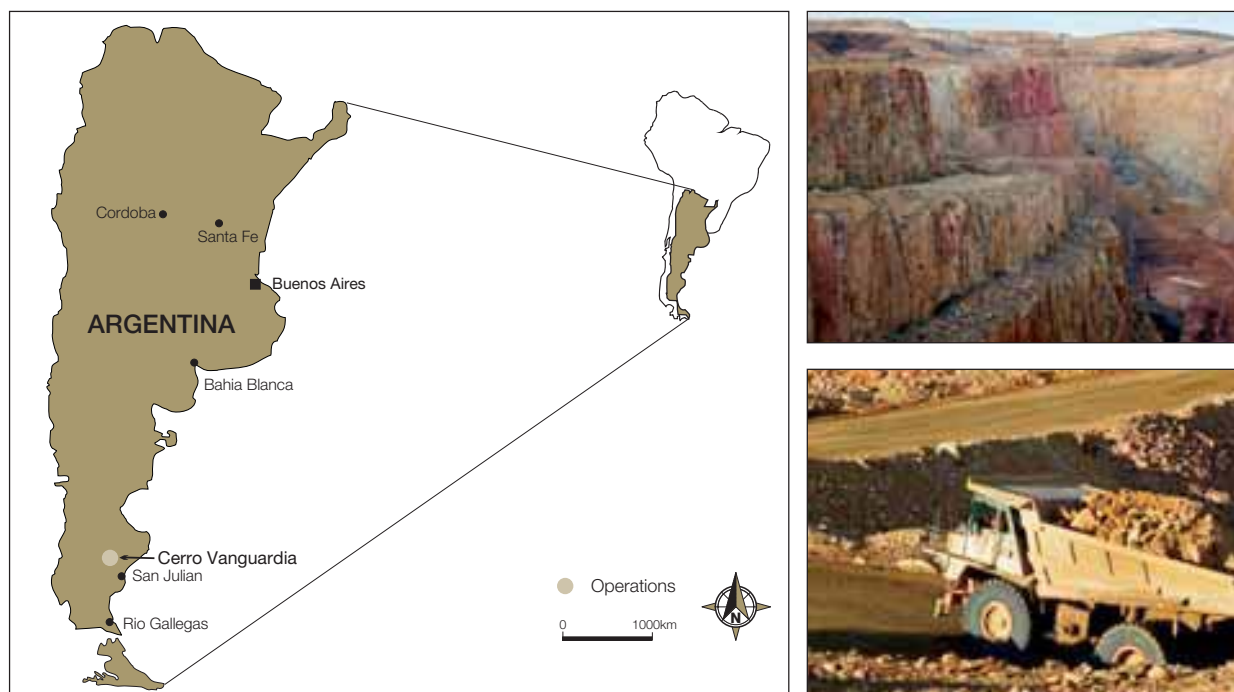

AngloGold Ashanti has a single operation in Argentina, the Cerro Vanguardia mine, which is a joint venture with Formicruz (the province of Santa Cruz). The province of Santa Cruz holds 7.5% and the remaining 92.5% belongs to AngloGold Ashanti.

MINERAL RESOURCE ESTIMATION

The Mineral Resource estimates are computed using the relevant computer modules of Datamine® software package. The geological model is a critical input to the Mineral Resource estimation process. The orebody boundaries for each geological entity (veins, stock work, wall rock) are defined from the detailed logging of all geological boreholes and after validation this information is used in the system to create a three dimensional model. This model is subsequently populated with a 5 x 25 x 5m (X by Y by Z) block model. The block sizes used are chosen to represent the dimensions in which the deposit is intended to be mined. Volumetric measurements of the orebody are subsequently computed in the system using the relevant block dimensions.

Ordinary kriging is used to perform the grade interpolation. Field tests are conducted to determine appropriate in-situ densities. The mining of a specific area of the orebody is surveyed and an accurate measurement of the corresponding mass associated with the mining area is recorded. The in-situ density is then computed by dividing the mass by the surveyed volume. Using the volume, grade and density information, the Mineral Resource estimates are computed for the individual orebodies.

ORE RESERVE ESTIMATION

The appropriate Mineral Resource models are used as the basis for Ore Reserves. All relevant modifying factors such as mining dilution and costs are used in the Ore Reserve conversion process. This is based on the original block grades and tonnage and includes waste material (both internal and external). Appropriate Ore Reserve cut-off grades are applied and all blocks above this cut-off are reported. For the reserve optimisation, Whittle® software was used and Datamine® software was utilised to design the pits.

Argentina

Regional overview cont.

Mineral Resource and Ore Reserve gold prices and exchange rate

	Units	2008	2007
Gold price – Mineral Resource	US\$/oz	1,000	700
Gold price – Ore Reserve	US\$/oz	720	600
Exchange rate	AR/US\$	3.10	3.15

Details of average drillhole spacing and type in relation to the Mineral Resource classification

Cerro Vanguardia	Category	Spacing m (- x -)	Type of drilling				Comments
			Diamond	RC	Blasthole	Other	
Cerro Vanguardia	Measured	12.5 x 12.5	–	✓	–	–	–
	Indicated	40 x 40	✓	✓	–	–	–
	Inferred	80 x 80	✓	✓	–	–	–
	Grade control	5 x 10	–	✓	–	–	–

Ore Reserve modifying factors

as at 31 December 2008								Metal-lurgical recovery factor	Comments
Cerro Vanguardia	Gold price used US\$/oz	Cut-off grade g/t Au	Cut-off value cmg/t Au	Stoping width cm	Dilution	Mine call factor (MCF)	%		
Heap leach	600	0.35	–	–	–	100.0	65.5		
Stockpile full grade ore	–	–	–	–	–	–	–		
Vein Mineral Resources	720	2.05	–	–	30	90.0	94	The average MCF over the last two years	

Reconciliation of Mineral Resource and Ore Reserve

as at 31 December 2008			Changes in gold contained Moz							
Mine	Percentage attributable	Category	2007	Depletion ⁽¹⁾	Model change ⁽²⁾	Scope change ⁽³⁾	2008	Net change diff	%	Comment
Cerro Vanguardia	92.5%	Resource	3.50	(0.16)	0.39	–	3.73	0.23	7	Exploration additions
		Reserve	1.88	(0.18)	0.17	(0.03)	1.84	(0.04)	(2)	Scope change due to mining, lower grades and higher costs
Total		Resource	3.50	(0.16)	0.39	–	3.73	0.23	7	
		Reserve	1.88	(0.18)	0.17	(0.03)	1.84	(0.04)	(2)	

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.
2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.
3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.

Argentina

Cerro Vanguardia



LOCATION

The Cerro Vanguardia property is located 160km north-west of Puerto San Julian and is situated within the southern Deseado Masive.

GEOLOGY

The oldest rocks in this part of Patagonia are of Precambrian-Cambrian age which are overlain by Permian and Triassic continental clastic rocks which have been faulted into a series of horsts and grabens, and are associated with both limited basaltic sills and dykes and with calc-alkaline granite and granodiorite intrusions. Thick andesite flows of Lower Jurassic age occur above these sedimentary units. A large volume of rhyolitic ignimbrites was emplaced during the Middle and Upper Jurassic age over an area of approximately 100,000km². These volcanic rocks include the Chon Aike formation ignimbrite units that host the gold-bearing veins at Cerro Vanguardia. Post-mineral units include Cretaceous and Tertiary rocks of both marine and continental origin, the Quaternary La Avenida formation, the Patagonia gravel and the overlying La Angelita basalt flows. These flows do not cover the area of the Cerro Vanguardia veins.

Gold and silver mineralisation at Cerro Vanguardia occurs within a vertical range of about 150m to 200m, in a series of narrow, banded quartz veins that occupy structures within the Chon Aike ignimbrites. These veins form a typical structural pattern related to major north-south (Concepcion) and east-west (Vanguardia) shears. Two sets of veins have formed in response to this shearing: one set strikes about N40W and generally dips 65° to 90° to the east while the other set strikes about N75W and the veins dip 60° to 80° to the south. They are typical of epithermal, low-temperature, adularia-sericite character and consist primarily of quartz in several forms as massive quartz, banded chalcedonic quartz and quartz-cemented breccias. Dark bands in the quartz are due to finely disseminated pyrite, now oxidised to limonite. The veins show sharp contacts with the surrounding ignimbrite, which hosts narrow stockwork zones that are weakly mineralised, and appear to have been cut by a sequence of north-east trending faults that have southerly movement with no appreciable lateral displacement.

Argentina

Cerro Vanguardia cont.

Mineral Resource


as at 31 December 2008

Cerro Vanguardia	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Heap leach	Measured	9.54	0.76	7.26	0.23
	Indicated	12.61	0.61	7.71	0.25
	Inferred	2.21	0.60	1.33	0.04
	Total	24.36	0.67	16.30	0.52
Vein Mineral Resources	Measured	1.47	8.03	11.78	0.38
	Indicated	9.40	7.32	68.78	2.21
	Inferred	2.76	6.93	19.12	0.62
	Total	13.62	7.32	99.68	3.21
Cerro Vanguardia	Total	37.99	3.05	115.98	3.73


Mineral Resource by-product: Silver (Ag)


Cerro Vanguardia	Reserve category	Metric		Contained silver tonnes	Contained silver Moz
		Tonnes Mt	Grade kg/t		
	Measured	11.01	26.86	295.73	9.51
	Indicated	22.00	65.11	1,432.67	46.06
	Inferred	4.97	83.46	414.81	13.34
Cerro Vanguardia	Total	37.99	56.42	2,143.21	68.91

Cerro Vanguardia: Mineral Resource reconciliation 2007 vs 2008

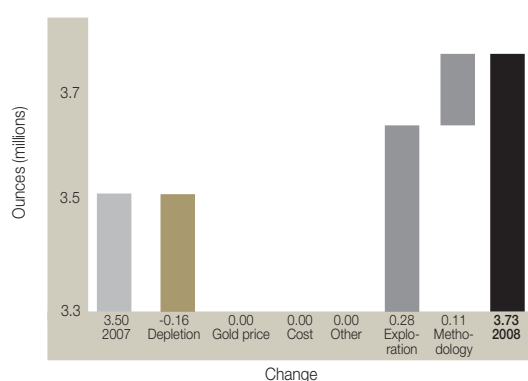

Cerro Vanguardia: Ore Reserve reconciliation 2007 vs 2008

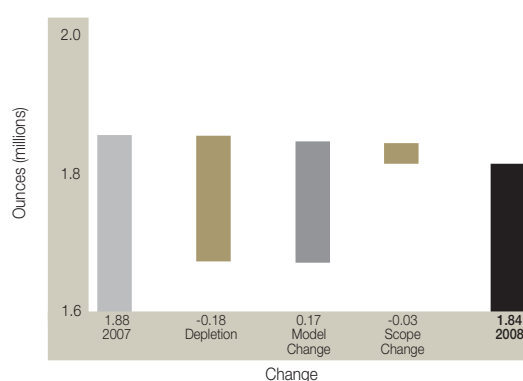

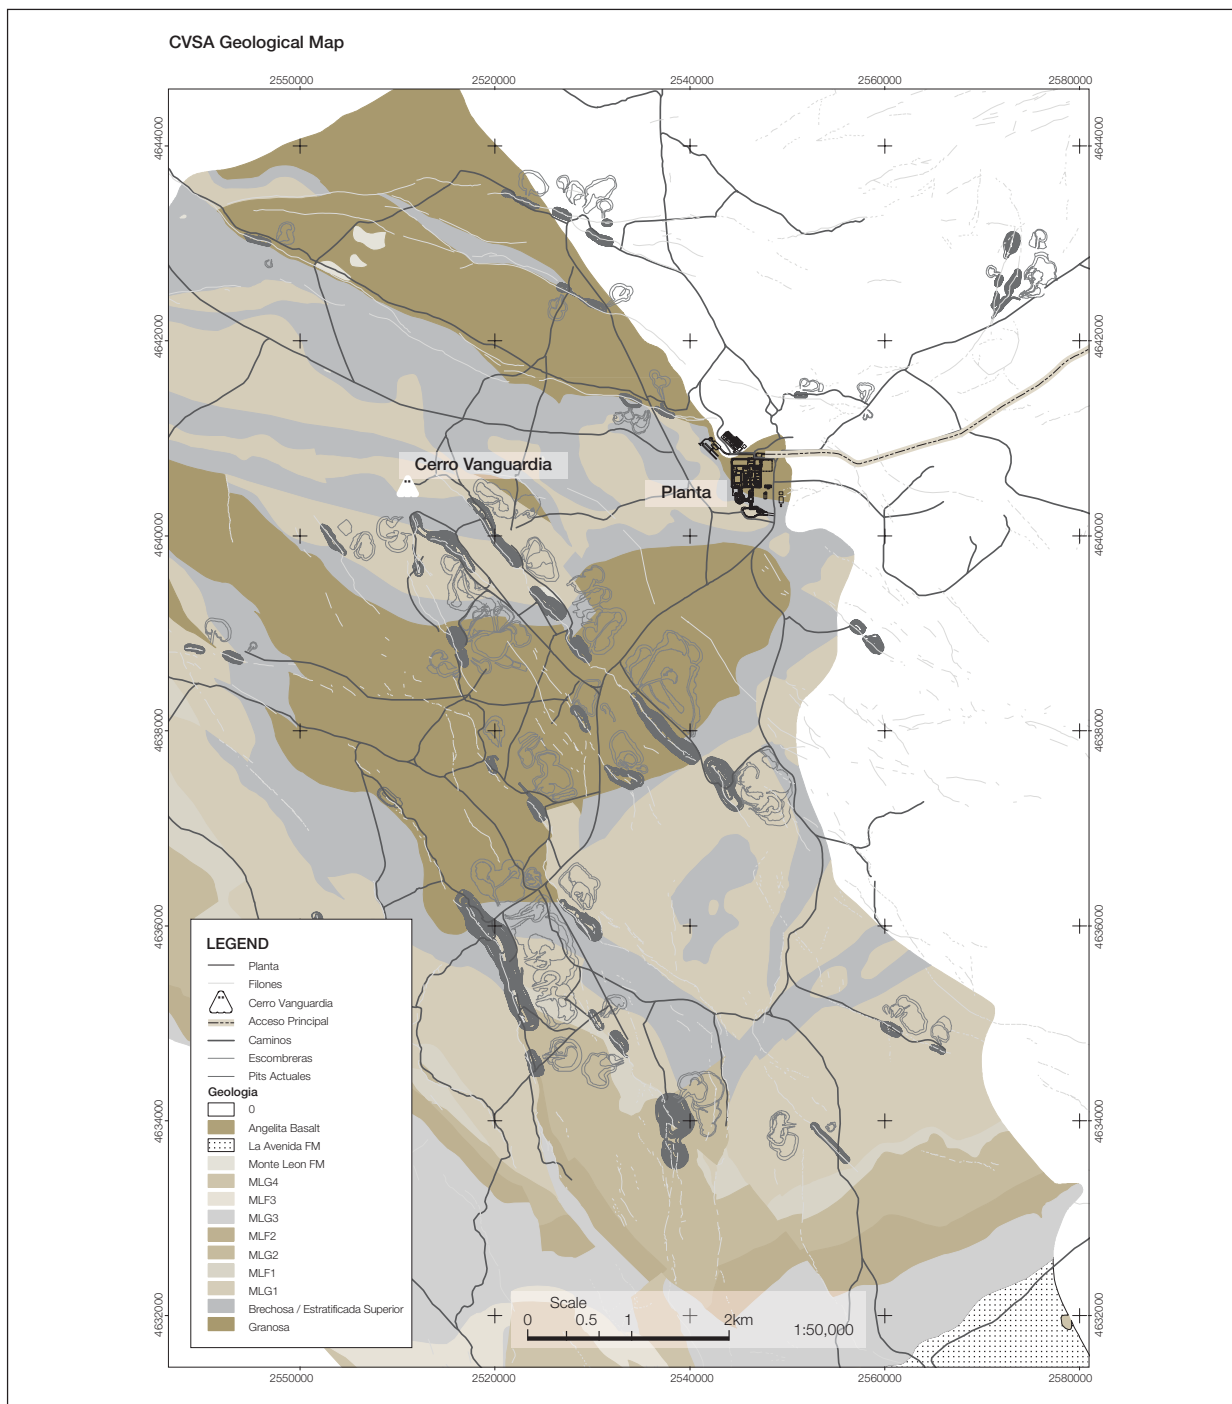

Heap-Leach Ore Reserves (in situ and stockpiles)

Ore reserves from heap leaching are included in this report this year. A successful feasibility study was completed and the company intends to continue with the project. The heap leach Ore Reserve has two components:

- stockpiles that have been drilled and surveyed in order to estimate the grade and to generate a block model, and
- future in situ production from the pit.

Argentina

Cerro Vanguardia cont.

Ore Reserve

as at 31 December 2008

Cerro Vanguardia	Category	Tonnes million	Grade g/t	Contained	Contained
				gold tonnes	gold Moz
Heap leach	Proved	8.87	0.70	6.23	0.20
	Probable	5.60	0.56	3.16	0.10
	Total	14.47	0.65	9.39	0.30
Vein Mineral Resources	Proved	1.12	6.86	7.66	0.25
	Probable	6.68	6.00	40.08	1.29
	Total	7.80	6.12	47.74	1.54
Cerro Vanguardia	Total	22.27	2.56	57.13	1.84


INFERRED MINERAL RESOURCE IN PIT OPTIMISATION

Inferred Mineral Resources were used in the pit optimisation process and 0.14 million ounces are present in the optimised pit.

Ore Reserve by-product: Silver (Ag)

Cerro Vanguardia	Reserve category	Metric		Imperial	
		Tonnes (Mt)	Grade (kg/t)	Contained silver tonnes	Silver (Moz)
	Proved	9.99	23.51	234.87	7.55
	Probable	12.29	71.19	874.57	28.12
Cerro Vanguardia	Total	22.27	49.81	1,109.43	35.67

Cerro Vanguardia – Surface (Metric)

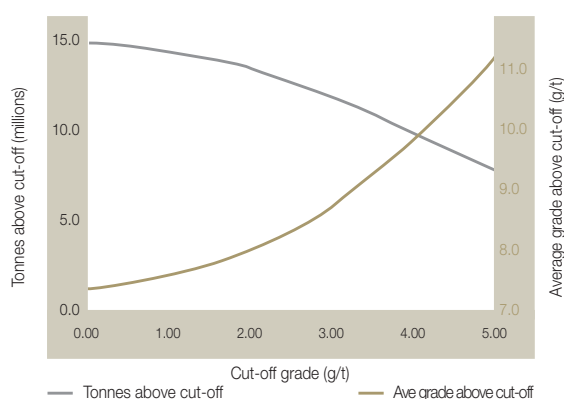


Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	V Scavuzzo	AusIMM	224834	9 years
Ore Reserve	AM Petermann	AusIMM	300299	8 years

Australia

Regional overview

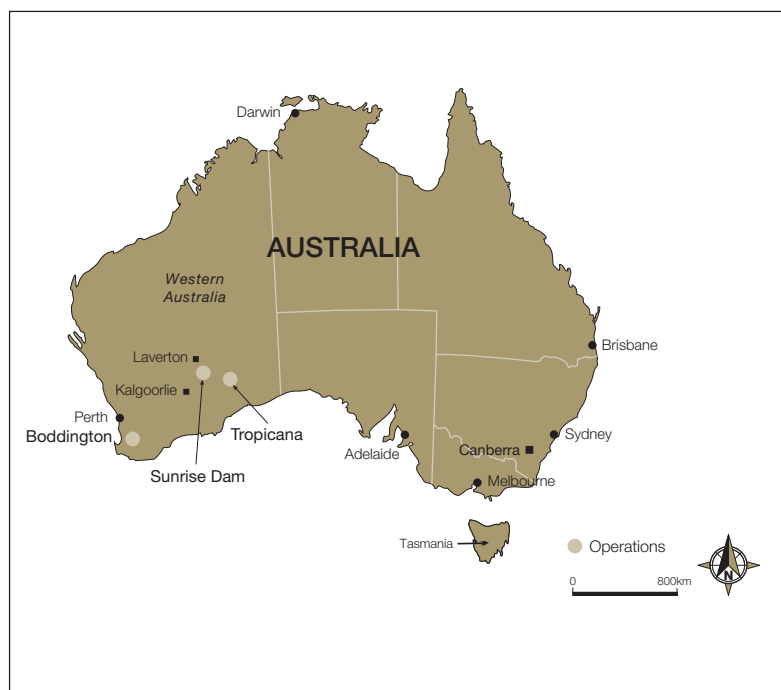

The Australian assets (formerly Acacia Resources Ltd) were acquired at the end of 1999 and comprise the Sunrise Dam and Boddington gold mines, and more recently the Tropicana Project.

AngloGold Ashanti owns 100% of Sunrise Dam Gold Mine. AngloGold Ashanti has a 33.33% interest in Boddington with joint venture partner Newmont Mining Corporation holding 66.67%. Boddington Gold Mine is managed by the BGM Management Company Pty Ltd (BGMMCo), which is now 100% owned by Newmont. The management of the company reports to a joint venture executive committee, which controls the joint venture. AngloGold Ashanti's interest in Boddington was sold to Newmont post the 2008 financial year-end.

The Tropicana Project is a joint venture with Independence Group NL (IGO) in which AngloGold Ashanti Australia Limited (AGAA) holds 70% and free carries IGO to the end of the pre-feasibility stage.

Mineral Resource and Ore Reserve gold prices and exchange rates

	Units	2008	2007
Sunrise Dam			
Gold price – Mineral Resource	US\$/oz	1,000	700
Gold price – Ore Reserve	US\$/oz	720	600
Exchange rate	US\$/Aus\$	0.80	0.71
Boddington			
Gold price – Mineral Resource	US\$/oz	1,000	700
Gold price – Ore Reserve	US\$/oz	725	575
Exchange rate	US\$/Aus\$	0.85	0.77

Australia

Regional overview *cont.*

Details of average drillhole spacing and type in relation to Mineral Resource classification

Mine/ Project	Category	Spacing m (- x -)	Type of drilling				Comments
			Diamond	RC	Blasthole	Other	
Boddington	Measured	40 x 35	✓	✓	-	-	Categorisation heavily dependent on spacing. Also based on estimation quality – slope of regression and (average) weighted distance of data from block.
	Indicated	130 x 105	✓	✓	-	-	Categorisation heavily dependent on spacing. Also based on estimation quality – slope of regression and (average) weighted distance of data from block.
	Inferred	160 x 225	✓	✓	-	-	Categorisation heavily dependent on spacing. Also based on estimation quality – slope of regression and (average) weighted distance of data from block.
	Grade control	-	-	-	-	-	
Sunrise Dam	Measured	25 x 25	✓	✓	-	-	
	Indicated	40 x 40	✓	✓	-	-	
	Inferred	50 x 100	✓	✓	-	-	
	Grade control	6 x 8	-	✓	-	-	
Tropicana	Measured	25 x 25	✓	✓	-	-	
	Indicated	50 x 50	✓	✓	-	-	
	Inferred	100 x 100	✓	✓	-	-	
	Grade control	-	-	-	-	-	

ORE RESERVE ESTIMATION

The Ore Reserve is estimated by Lerch's Grossman (LG) pit optimisation using the relevant Mineral Resource models and updated geotechnical and metallurgical parameters and appropriate operating costs. The recoverable gold Mineral Resource model has been estimated either by a geostatistical technique called multiple indicator kriging or uniform conditioning (non-linear geostatistical methods) and reflects the selectivity or selective mining unit (SMU) of the mining equipment that is intended to be used to recover the Mineral Resource within the Ore Reserve pit design.

MODIFYING FACTORS

The Boddington cut-off grade (COG) is formulated on a net revenue basis (Net Smelter Return - NSR) taking into account gold and copper grade/metal price/recovery. The 0.40g/t COG approximates a life of mine cut-off grade. This represents diorite material and using unit gold/copper prices of A\$850/oz and A\$2.40/lb respectively. This NSR with gold leach and gravity contributions cut-off grade is A\$9.33/t and includes stockpile rehandle mining cost of A\$0.76/t thereby allowing for an elevated cut-off grade strategy over the life of mine and inclusive of an end of mine life rehandle cost.

Ore Reserve modifying factors

as at 31 December 2008								Metal-	
Mine	Gold price used US\$/oz	Cut-off grade g/t Au	Cut-off value cmg/t Au	Stoping width cm	Dilution	Mine call factor (MCF)	recovery factor %	Comments	
Boddington									
Surface	725	0.55	–	–	–	–	80.4	Cu average recovery 82.3%	
Sunrise Dam									
Surface – Mega Pit	720	1.0	–	–	–	–	83.5		
Surface – North Wall Cutback	–	–	–	–	–	–	–		
Total stockpiles	–	–	–	–	–	–	–		
Underground	720	1-3.2	–	–	10-63%	100.0	76-94		

Reconciliation of Mineral Resource and Ore Reserve

as at 31 December 2008			Changes in gold contained Moz								
Mine	Percentage attributable	Category	2007	Depletion ⁽¹⁾	Model change ⁽²⁾	Scope change ⁽³⁾	2008	Net change Diff	%	Comment	
Boddington	33.33%	Resource	10.28	(0.02)	0.29	1.36	11.91	1.63	16	Growth in Mineral Resource due to successful near mine exploration drilling and higher gold price	
		Reserve	5.54	(0.01)	–	1.15	6.69	1.14	21	Growth in Ore Reserve due to successful reserve conversion drilling and higher gold price	
Sunrise Dam	100%	Resource	3.08	(0.28)	0.99	0.06	3.85	0.78	25	Underground drilling exploration success and higher gold price	
		Reserve	1.63	(0.54)	0.62	0.18	1.90	0.27	16	Underground drilling exploration success and higher gold price	
Tropicana	70%	Resource	2.84	–	0.18	0.49	3.51	0.67	24	Exploration success and higher gold price	
		Reserve	–	–	–	–	–	–	–		
Total		Resource	16.19	(0.30)	1.47	1.90	19.27	3.08	19		
		Reserve	7.18	(0.54)	0.62	1.34	8.59	1.41	20		

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.

2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.

3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.

Australia

Boddington



The Boddington operation is situated approximately 130km south-east of Perth in Western Australia and is a joint venture between AngloGold Ashanti (33.33%) and Newmont (67.67%), with Newmont managing the operation. Construction of the 35.2Mt per annum basement treatment plant is well advanced and production is anticipated to commence in 2009.

GEOLOGY

Boddington is located in the Archaean Saddleback Greenstone Belt, a north-west trending, fault bounded sliver of greenstones approximately 50km long and 8km wide. The greenstone belt rocks mainly comprise Archaean volcanic and shallow-level intrusive rocks. The greenstones were intruded by a suite of dioritic intrusions and granodiorite-tonalite intrusions.

The main zone of gold mineralisation occurs reasonably continuously over a strike length of over 6km and a width of about 1km. The previous oxide operation, which closed in 2001, produced approximately 6.1 million ounces over a mine life of 15 years from a lateritic deposit developed over a large basement Mineral Resource.

The basement Mineral Resource, beneath the oxide pits, is hosted predominantly by andesitic volcanics and diorites, and contains both gold and copper mineralisation. There is a wide range of alteration intensity and distribution, with four alteration or deformation events having been identified (D1 to D4). The major structures controlling mineralisation are the late D4 biotite-altered west-southwest and northwest-trending strike slip faults. A variety of earlier D1, D2 and D3 shear zones are also important zones of structural preparation which become zones of high-grade mineralisation when interacted with D4 faults.

The alteration types that are associated with gold and copper mineralisation are clinozoisite-biotite-sulphide veins and late actinolite-sulphide veins. These vein types form the basis of the stockwork mineralisation of the Wandoo resource.


The bulk of the gold mineralisation is associated with the late-stage clinozoisite-biotite-sulphide alteration event with gold grades in this alteration being typically less than 3g/t Au and averaging about 1g/t Au. The second mineralising alteration style of late actinolite-sulphide veining contains generally higher levels of gold, averaging 5g/t Au to 8g/t Au, but ranging from 30g/t Au to 70g/t Au in the larger veins.

MINERAL RESOURCE ESTIMATION

The Mineral Resources and Ore Reserves of the Boddington expansion project have been updated as part of the annual evaluation process by BGMMCo personnel. The geostatistical method of uniform conditioning is used to estimate the Mineral Resource. All available geological drillhole information is validated for use in the models and the local geology of the orebody is used to classify the drillhole information into appropriate geostatistical domains. Detailed statistical analyses are conducted on each of these domains and this allows for the identification of high-grade outliers. If these values are anomalous to the general population characteristics then they are cut back to the appropriate upper limit of the population.

Mineral Resource					
as at 31 December 2008					
Boddington	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	67.82	0.83	56.29	1.81
	Indicated	373.10	0.65	243.67	7.83
	Inferred	129.87	0.54	70.39	2.26
Boddington	Total	570.79	0.65	370.35	11.91

Exclusive Mineral Resource					
as at 31 December 2008					
Boddington	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	10.89	0.44	4.84	0.16
	Indicated	165.50	0.53	87.17	2.80
	Inferred	129.87	0.54	70.39	2.26
Boddington	Total	306.26	0.53	162.40	5.22

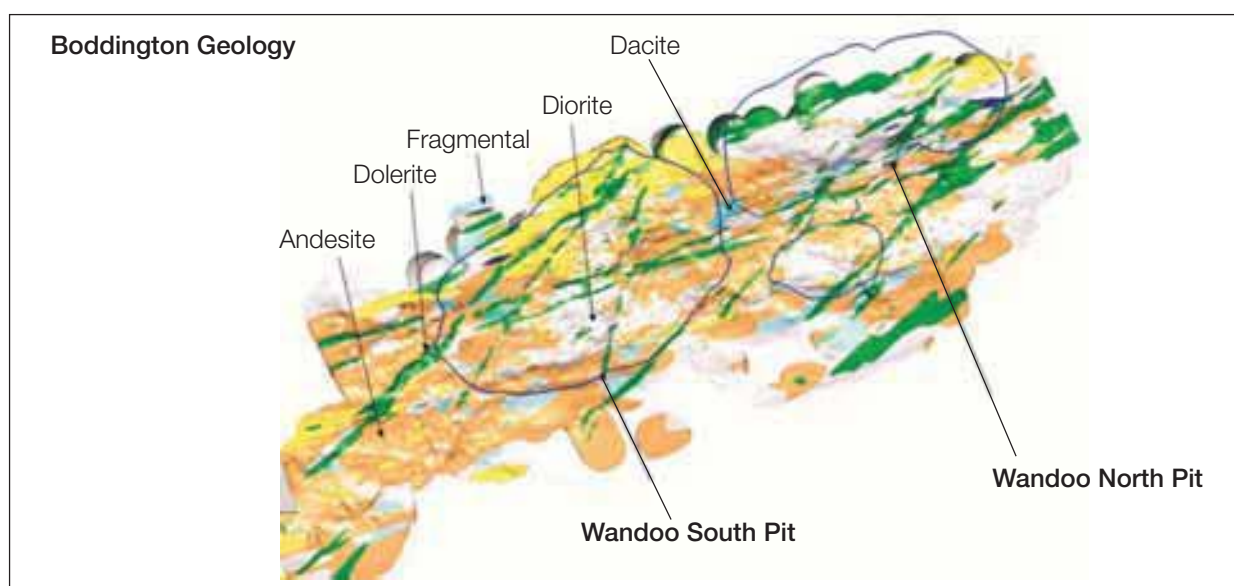


Australia

Boddington cont.


Mineral Resource by-products: Copper (Cu)

Boddington	Reserve category	Metric		Contained Copper	
		Tonnes million	Grade (ppm)	Tonnes million	Pounds millions
	Measured	67.82	1,043	0.07	155.93
	Indicated	373.10	986	0.37	810.79
	Inferred	129.87	912	0.11	261.13
Boddington	Total	570.79	976	0.56	1,227.85

Boddington: Mineral Resource reconciliation 2007 vs 2008

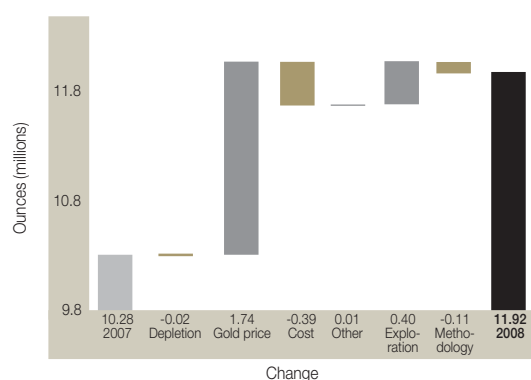

Boddington: Ore Reserve reconciliation 2007 vs 2008

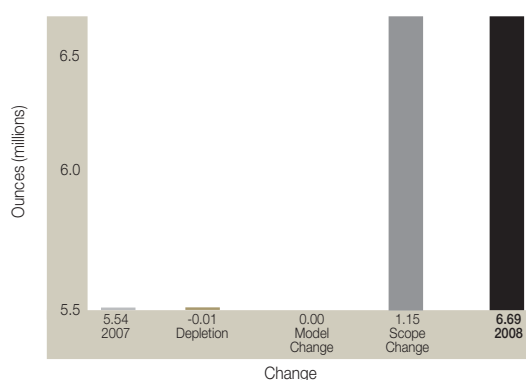

Ore Reserve


as at 31 December 2008

Boddington	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Proved	56.93	0.90	51.45	1.65
	Probable	207.60	0.75	156.50	5.03
Boddington	Total	264.53	0.79	207.95	6.69

Ore Reserve by-products: Copper (Cu)

Boddington	Reserve category	Metric		Contained Copper	
		Tonnes million	Grade (ppm)	Tonnes million	Pounds millions
	Proved	56.93	1,112	0.063	139.51
	Probable	207.60	1,091	0.227	499.52
Boddington	Total	264.53	1,096	0.290	639.03

Boddington – Surface (Metric)

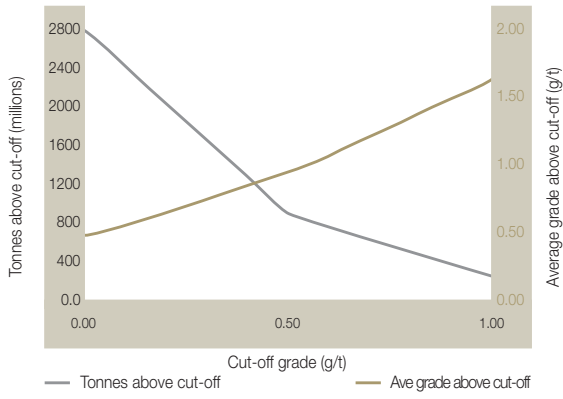

Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	K Gleeson	AusIMM	202246	19 years
Ore Reserve	L Setiawan	AusIMM	991262	17 years



Australia

Sunrise Dam



Sunrise Dam lies some 220km north-north-east of Kalgoorlie and 55km south of Laverton in Western Australia. The mine, 100% owned by AngloGold Ashanti, comprises an open-pit operation and an underground project. Mining is carried out by contractors and ore is treated in a conventional gravity and leach process plant. The mining of the open pit has reached its final depth and only a small north wall cutback is now in operation.

GEOLOGY

At Sunrise Dam, gold mineralisation is structurally controlled and vein hosted. The style of mineralisation can be differentiated depending on the structure or environment in which it is hosted. There are three dominant domains recognised:

- Shear-related and high strain – e.g. Sunrise Shear Zone,
- Stock work development in planar faults with brittle characteristics (these occur in all rock types and are commonly concentrated at lithofacies contacts within the volcanic stratigraphy or the porphyry margin and within hinge domains within the magnetite shales) – e.g. Western Shear Zone, Watu, Cosmo, Summercloud; and
- Placer-style mineralisation hosted within the fluvial sediments.


The vein and shear styles of gold mineralisation are introduced primarily during the third and fourth deformation stages and variations in structural style, ore and gangue mineralogy and alteration intensity are observed locally. Secondary (supergene) gold mineralisation is also an important part of the Cleo-Sunrise ore system and is highlighted by extremely high gold grades developed near the base of Tertiary paleochannels and horizontal blankets of mineralisation related to iron redox fronts and associated water tables.

MINERAL RESOURCE ESTIMATION

Open-pit estimates are generated using a geostatistical method called multiple-indicator kriging. All available geological drillhole information is validated for use in the models and the local geology of the orebody is used to classify the drillhole information into appropriate geostatistical domains. Detailed statistical analyses are conducted on each of these domains and this allows for the identification of high-grade outliers. If these

values are anomalous to the general population characteristics then they are cut back to the appropriate upper limit of the population.

Estimation of the underground Mineral Resource uses the geological model boundaries to subdivide all drillhole data into appropriate domains. Statistical analyses are performed on these domains and, in a similar manner to that of open-pit estimation, high-grade outliers are identified and appropriately cut back to the upper limit of the population. A geostatistical method called ordinary kriging is used to produce estimates of a pre-determined block size. These block sizes are 10m x 10m and 20m x 20m. The geostatistical technique of conditional simulation has been used to estimate the Cosmo ore zone.

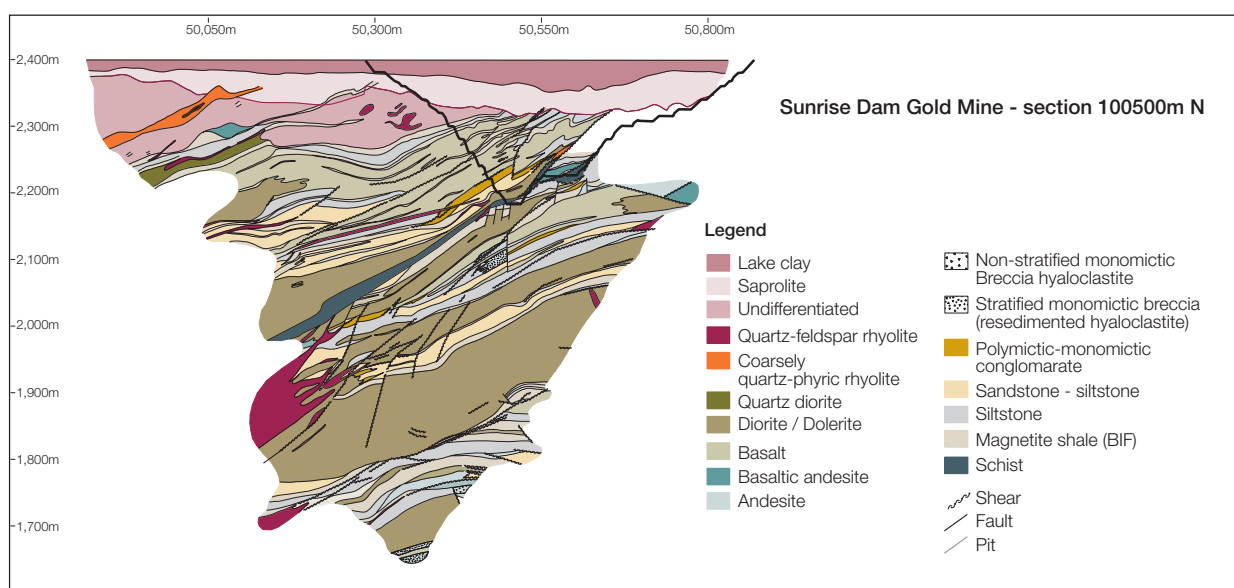

Mineral Resource

as at 31 December 2008

Sunrise Dam	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
North Wall Cutback	Measured	2.76	3.32	9.17	0.30
	Indicated	1.78	2.76	4.89	0.16
	Inferred	–	–	–	–
	Total	4.53	3.10	14.06	0.45
Golden Delicious	Measured	–	–	–	–
	Indicated	1.04	1.84	1.91	0.06
	Inferred	2.64	1.64	4.33	0.14
	Total	3.68	1.70	6.24	0.20
Total stockpiles	Measured	16.72	1.32	22.06	0.71
	Indicated	–	–	–	–
	Inferred	–	–	–	–
	Total	16.72	1.32	22.06	0.71
Underground	Measured	–	–	–	–
	Indicated	6.84	6.57	44.92	1.44
	Inferred	5.29	6.15	32.54	1.05
	Total	12.13	6.39	77.47	2.50
Sunrise Dam	Total	37.06	3.23	119.83	3.85

Australia

Sunrise Dam *cont.*


Exclusive Mineral Resource

as at 31 December 2008


Sunrise Dam	Category	Tonnes million	Grade g/t	Contained	Contained
				gold tonnes	gold Moz
	Measured	10.01	1.01	10.13	0.33
	Indicated	2.75	5.68	15.66	0.50
	Inferred	7.93	4.65	36.88	1.19
Sunrise Dam	Total	20.69	3.03	62.66	2.01

The Exclusive Mineral Resource includes Inferred Mineral Resource and low-grade stockpiles that do not currently meet the Ore Reserve cut-off grade requirements.

Sunrise Dam: Mineral Resource reconciliation
2007 vs 2008

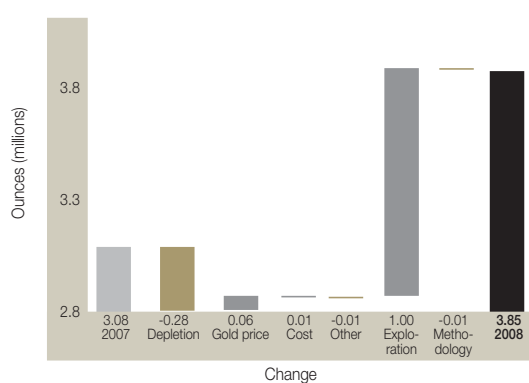

Sunrise Dam: Ore Reserve reconciliation
2007 vs 2008

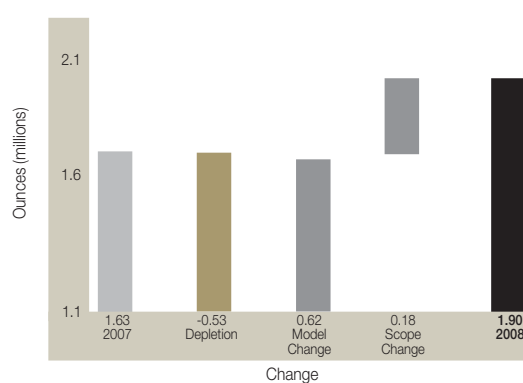

Ore Reserve

as at 31 December 2008

Sunrise Dam	Category	Tonnes million	Grade g/t	Contained	Contained
				gold tonnes	gold Moz
North Wall Cutback	Proved	2.42	3.68	8.90	0.29
	Probable	1.48	3.12	4.62	0.15
	Total	3.90	3.47	13.52	0.44
Total stockpiles	Proved	8.48	1.67	14.20	0.46
	Probable	–	–	–	–
	Total	8.48	1.67	14.20	0.46
Underground	Proved	–	–	–	–
	Probable	5.42	5.80	31.45	1.01
	Total	5.42	5.80	31.45	1.01
Sunrise Dam	Total	17.80	3.32	59.16	1.90

INFERRED MINERAL RESOURCE IN PIT OPTIMISATION

0.26 million ounces of Inferred Mineral Resources are included in the business plan.

Sunrise Dam – Surface (Metric)




Competent persons

Sunrise Dam	Type	Name	Professional organisation	Registration number	Relevant experience
Surface	Mineral Resource	J Biggam	AusIMM	112082	15 years
	Ore Reserve	M Janas	AusIMM	210148	17 years
Underground	Mineral Resource	J Biggam	AusIMM	112082	15 years
	Ore Reserve	S Tombs	AusIMM	105785	32 years



Australia

Tropicana

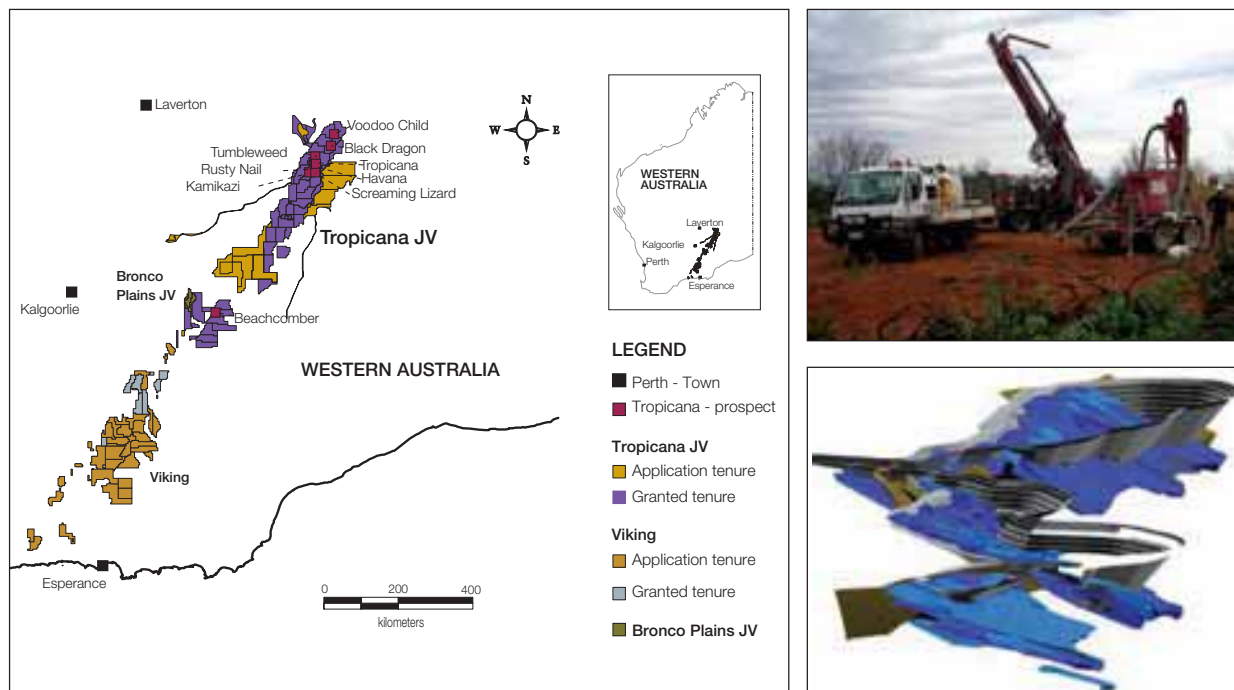

The Tropicana gold deposit is located approximately 350km north-east of Kalgoorlie within the Great Victoria Desert, Western Australia. Tropicana is the first deposit discovered in this remote greenfields exploration area.


GEOLOGY

The Tropicana deposit comprises two known mineralised zones, the Tropicana zone to the north and Havana zone to the south. Together the known mineralised zones define a system that extends over a 4km strike length. The lenses have been tested to a vertical depth of 350m to 400m, and are open down dip. The Tropicana and Havana zones are grossly “stratiform” within the preferred gneissic host sequence. The Havana zone consists of multiple stacked lenses, whereas Tropicana comprises one main mineralised lens.


MINERAL RESOURCE ESTIMATION

The geostatistical method of uniform conditioning is used to estimate the Mineral Resource. All available geological drillhole information is validated for use in the models and the local geology of the orebody is used to classify the drillhole information into appropriate geostatistical domains. Detailed statistical analyses are conducted on each of these domains and this allows for the identification of high-grade outliers. If these values are anomalous to the general population characteristics, then they are cut back to the appropriate upper limit of the population.


Mineral Resource					
as at 31 December 2008					
Tropicana	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	13.96	2.38	33.25	1.07
	Indicated	21.73	2.06	44.75	1.44
	Inferred	16.99	1.83	31.16	1.00
Tropicana	Total	52.68	2.07	109.16	3.51

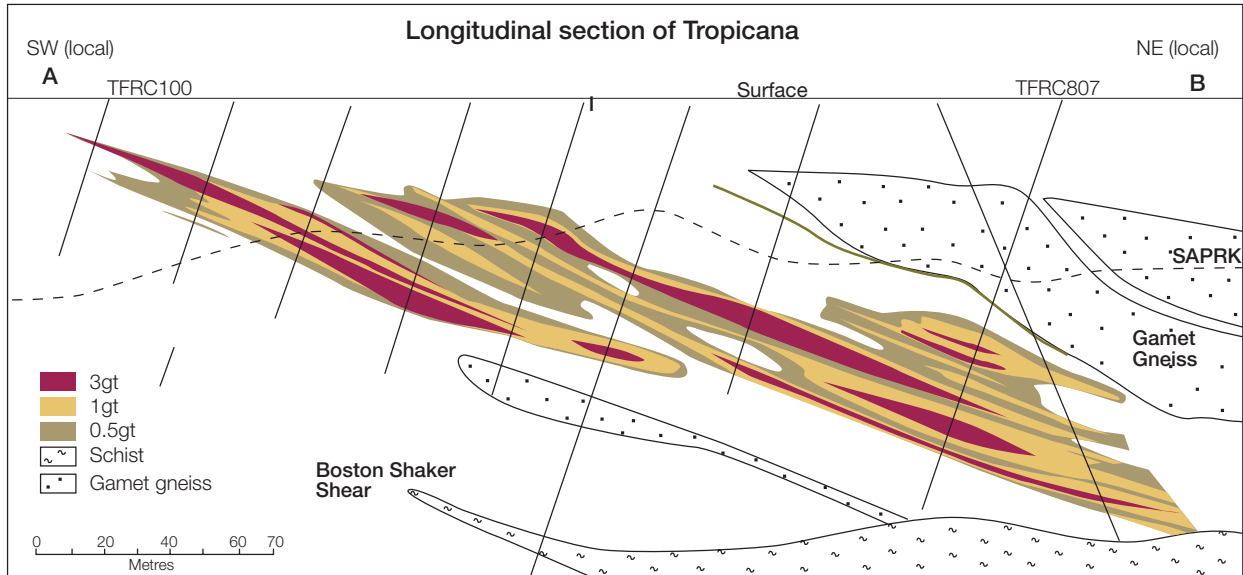

Tropicana: Mineral Resources
2007 vs 2008

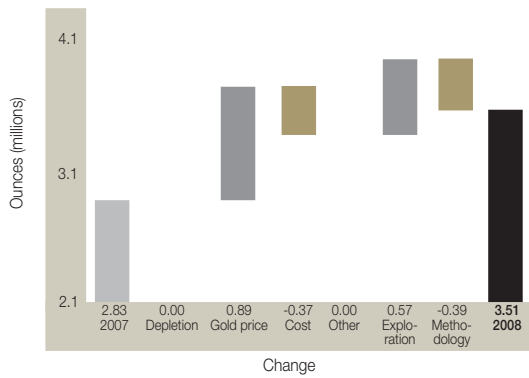

Tropicana – Surface (Metric)

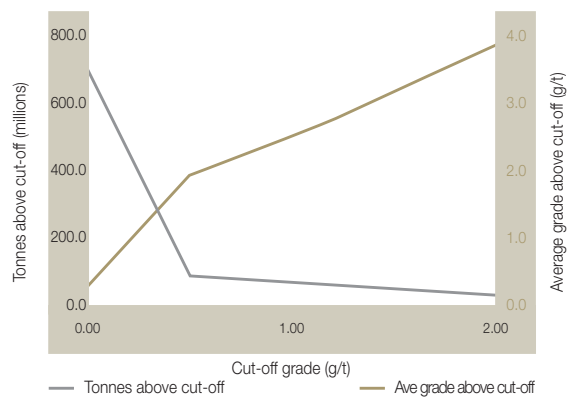

Competent person

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	M Kent	AusIMM	203631	11 years

Brazil

Regional overview



AngloGold Ashanti's operations in Brazil comprise the wholly-owned AngloGold Ashanti Brasil Mineração (formally Morrow Velho) and a 50% interest in the Mineração Serra Grande Mine.

Mineral Resource and Ore Reserve gold price and exchange rates

	Units	2008	2007
Gold price – Mineral Resource	US\$/oz	1,000	700
Gold price – Ore Reserve	US\$/oz	720	600
Exchange rate – Brazil	R\$/US\$	1.94	1.95

Details of average drillhole spacing and type in relation to the Mineral Resource classification

Mine/ Project	Category	Spacing m (- x -)	Type of drilling				Comments
			Diamond	RC	Blasthole	Other	
Serra	Measured	10 x 10, 10 x 20	✓	–	–	–	
Grande	Indicated	10 x 20, 20 x 50	✓	–	–	–	
	Inferred	50 x 100, 50 x 200	✓	–	–	–	
	Grade control	2 x 2	–	–	–	✓	Channel sample

Ore Reserve modifying factors

as at 31 December 2008

Mine/Project	Cut-off grade g/t Au	Stoping width metres	Dilution %	Mine call factor (MCF)	Metallurgical recovery factor %	Comments
Brasil Mineração						
Corrego Do Sitio Oxides	1.35-1.44	3-4	28	92	88	
Corrego Do Sitio Sulphides	3.93	2.2-6.0	29	95	90	
Cuiaba Sulphides – Main Area	2.82	4-15	5	94.5	93	
Lamego Sulphides	4.27	3.4-15	5-87	95	93	Mining recovery of 95%
Serra Grande						
Mina Nova	1.96	–	5	100	95	
Open Pit	1.0	–	30	100	95	
Serra Grande – Mina 3	2.97	–	5	100	95	
Total stockpiles	5.15	–	5	100	95	

Reconciliation of Mineral Resource and Ore Reserve

as at 31 December 2008

Mine	Percentage attributable	Category	Changes in gold contained Moz					Net change		Comment
			2007	Depletion ⁽¹⁾	Model change ⁽²⁾	Scope change ⁽³⁾	2008	Diff	%	
Brasil Mineração	100%	Resource	10.92	(0.43)	0.04	–	10.53	(0.39)	(4)	Mineral Resource conversion process
		Reserve	2.48	(0.34)	0.45	(0.03)	2.56	0.08	3	Mineral Resource converted into Ore Reserves, mainly at Cuiaba Mine
Serra Grande	50%	Resource	0.91	(0.10)	0.20	(0.03)	0.98	0.07	8	Exploration process and new orebody discovery Pequizao
		Reserve	0.39	(0.09)	0.05	0.01	0.36	(0.03)	(8)	Lower grade or thickness in some small areas
Total		Resource	11.82	(0.53)	0.24	(0.03)	11.50	(0.32)	(3)	
		Reserve	2.87	(0.43)	0.50	(0.02)	2.92	0.05	2	

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.

2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.

3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.

Brazil

Brasil Mineração




GEOLOGY

AngloGold Ashanti Brasil Mineração (Brasil Mineração) has mining rights over 61,864ha in the state of Minas Gerais in south-eastern Brazil. The Brasil Mineração complex is located in the municipalities of Nova Lima, Sabará and Santa Bárbara, south and east of the city of Belo Horizonte and within the mining district referred to as the Iron Quadrilateral (Quadrilátero Ferrífero). This area hosts numerous historic and current gold mining operations, as well as a number of open-pit limestone and iron ore operations. Currently AngloGold Ashanti mines gold-bearing ore at the Cuiabá underground mine and from the Córrego do Sítio heap-leach mine.

Cuiabá mine, located in the municipality of Sabará, has gold mineralisation associated with sulphides and quartz veins in Banded Iron Formation (BIF) and volcanic sequences. Where BIF is mineralised, the ore appears strongly stratiform due to the selective sulphidation of the iron-rich layers. Steeply plunging shear zones tend to control the ore shoots, which commonly plunge parallel to intersections between the shears and other structures. The controlling mineralisation structures are the apparent intersection of thrust faults with tight isoclinal folds in a ductile environment. The host rocks at Brasil Mineração are BIF, and mafic volcanics (principally basaltic). Mineralisation is due to the interaction of low salinity carbon dioxide rich fluids with the high-iron BIF, basalts and carbonaceous graphitic schists. Sulphide mineralisation consists of pyrite and pyrrhotite with subordinate arsenopyrite and chalcopyrite; the latter tends to occur as a late-stage fracture fill and is not associated with gold mineralisation. Wallrock alteration is typically carbonate, potassic and silicic. The Lamégo deposit is close to Cuiabá and the style of mineralisation is similar.

Some 30km to the south-east, the mineralised orebodies at Córrego do Sítio are narrow NE-SW elongated lenses dipping at 20° to 30° and with a pitch angle to the north-east. In general, the mineralised orebodies comprise sericitic zones and quartz veinlets. The gold occurs as inclusions (microscopic or sub-microscopic) in millimetre-size acicular crystals of arsenopyrite, and also as intergrowths on the margins of the sulphide. Other typical minerals in the orebodies are pyrrhotite, pyrite and chalcopyrite.

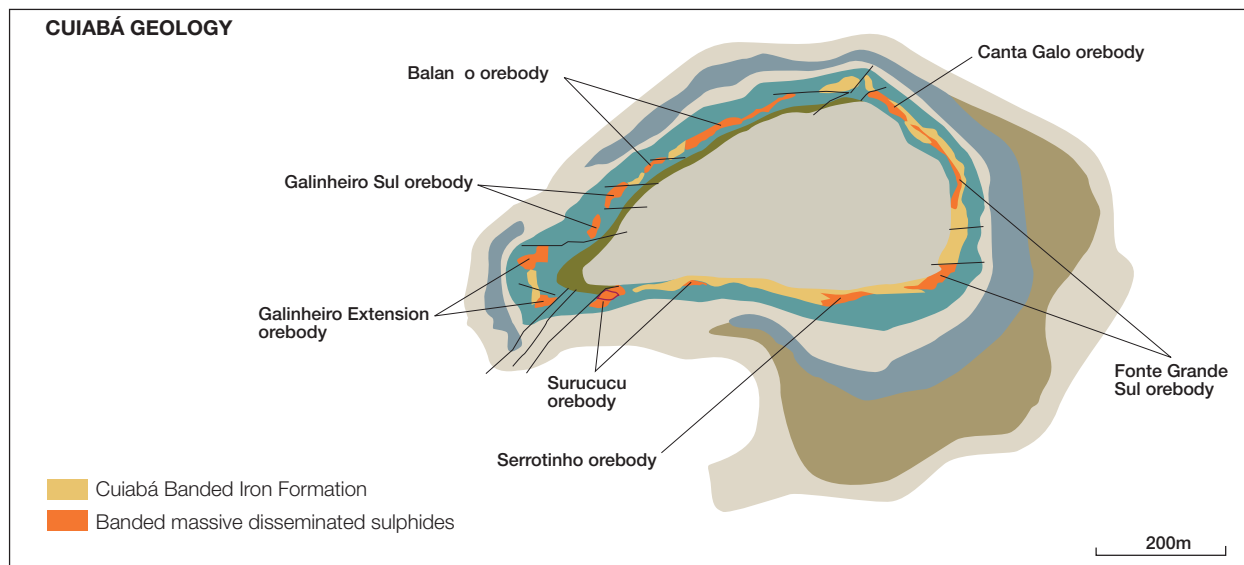

PROJECTS

The Córrego do Sítio Underground Sulphide Project is ongoing, with the target on exploiting the sulphide Mineral Resources of the Córrego do Sítio underground orebodies, namely Cachorro Bravo, Laranjeiras and Carvoaria Velha. The project is in the feasibility study phase. This project is expected to produce 90,000 ounces of gold annually.

The development of a ramp and the exposure of the Cachorro Bravo and Laranjeiras orebodies are continuing. The development of access drives to the Carvoaria Velha orebody is ongoing and exposure of the Laranjeira orebody to increase the extent of the mineable resource has begun. Trial mining on the Cachorro Bravo orebody is in progress as is confirming the operational mining parameters for the feasibility study. Two mine methods are being tested: sublevel stoping and cut and fill. The metallurgical process has been confirmed and pressure oxidation via autoclaves is the best option given the characteristics of the ore.

AngloGold Ashanti has bought the São Bento (SB) mine, a Brazilian gold operation wholly owned by Eldorado Gold Corporation (Eldorado) and held in São Bento Mineração S.A. (SBMSA) an indirect, wholly-owned subsidiary of Eldorado, located in the vicinity of the Córrego do Sítio mine, in the municipality of Santa Bárbara in the Iron Quadrangle region of the state of Minas Gerais. This acquisition will double the scale and enhance the feasibility of Córrego do Sítio Project and thereby increase the dominant position of AngloGold Ashanti as a gold producer in Brazil's Iron Quadrangle.

The Lamego Project explores the orebodies on the Lamego property, close to the Cuiabá mine. This project is expected to produce approximately 345,000 ounces.

Given proximity of the Lamego Project to Cuiabá mine, there is the added benefit that ore from Lamego can be treated at the Cuiabá Plant, the expansion of which was designed to treat this additional ore.

Brazil

Brasil Mineração cont.

MINERAL RESOURCE ESTIMATION

Three dimensional models of the BIF and sulphide orebodies are created from the drillhole data. Prototype block models of 10m x 10m x 10m are used to quantify the volume of the orebody and ordinary kriging is used as the geostatistical technique to interpolate grade estimates for all blocks. Other geostatistical techniques such as uniform conditioning and indicator kriging are also used to quantify the proportion of economic ore. This is reported according to the dimensions of the smallest mining unit.

Mineral Resource					
as at 31 December 2008					
Brasil Mineração	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Corrego do Sitio	Measured	1.50	6.43	9.65	0.31
	Indicated	5.86	6.61	38.70	1.24
	Inferred	5.69	6.60	37.51	1.21
	Total	13.04	6.58	85.87	2.76
Cuiaba	Measured	6.24	8.21	51.24	1.65
	Indicated	3.58	7.06	25.26	0.81
	Inferred	11.92	7.75	92.41	2.97
	Total	21.74	7.77	168.90	5.43
Lamego	Measured	0.55	6.20	3.38	0.11
	Indicated	1.61	7.21	11.57	0.37
	Inferred	5.04	5.05	25.44	0.82
	Total	7.19	5.62	40.39	1.30
MMV - Morrow Da Gloria Sulphides	Measured	0.06	7.21	0.46	0.02
	Indicated	0.05	5.92	0.29	0.01
	Inferred	0.74	6.71	4.95	0.16
	Total	0.85	6.70	5.70	0.18
MMV- Luzia Da Mota Oxides	Measured	0.19	3.23	0.63	0.02
	Indicated	0.50	3.00	1.51	0.05
	Inferred	0.23	2.97	0.70	0.02
	Total	0.93	3.04	2.83	0.09
MMV- Raposos Sulphides	Measured	0.35	6.77	2.37	0.08
	Indicated	0.86	6.65	5.74	0.19
	Inferred	2.18	7.13	15.55	0.50
	Total	3.39	6.97	23.66	0.76
Brasil Mineração	Total	47.15	6.94	327.36	10.53

Exclusive Mineral Resource					
as at 31 December 2008					
Brasil Mineração	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	3.16	6.68	21.08	0.68
	Indicated	6.40	6.42	41.06	1.32
	Inferred	24.78	6.90	171.10	5.50
Brasil Mineração	Total	34.34	6.79	233.23	7.50

The Exclusive Mineral Resource is predominantly from the Lamego Sulphides and MMV. This Exclusive Mineral Resource has the potential to be mineable, depending on the gold price and the outcome of technical studies.


Mineral Resources below infrastructure

as at 31 December 2008		Metric			Imperial
		Tonnes	Grade	Contained	Contained
Brasil Mineração	Category	million	g/t	gold tonnes	gold Moz
Cuiaba	Total	13.84	7.82	108.32	3.48
Corrego do Sitio	Total	9.33	7.12	66.40	2.16
Lamego	Total	4.98	5.51	27.43	0.88
Brasil Mineração	Total	28.15	7.18	202.15	6.50


Mineral Resource by-products: Sulphur (S)

Brasil Mineração	Resource category	Metric Tonnes million	Grade (%S)	Contained Sulphur (Mt)	Imperial Pounds million
	Measured	6.24	6.4	0.40	883
	Indicated	3.58	6.7	0.24	528
	Inferred	11.92	7.3	0.86	1,905
Brasil Mineração	Total	21.74	6.9	1.50	3,316

Brasil Mineração:
Mineral Resource reconciliation
2007 vs 2008

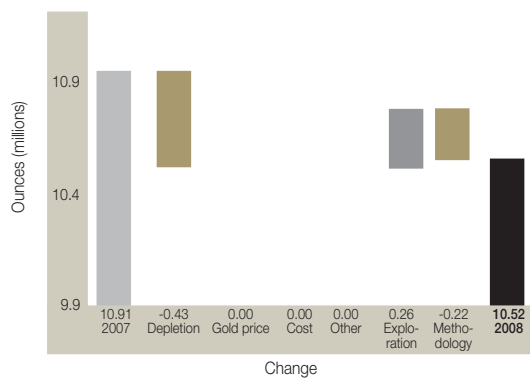

Brasil Mineração:
Ore Reserve reconciliation
2007 vs 2008

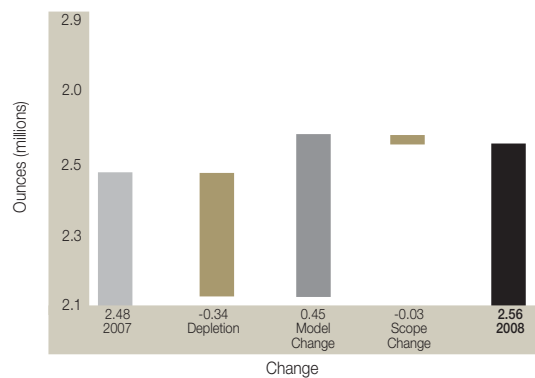

Brazil

Brasil Mineração cont.

ORE RESERVE ESTIMATION

Pit optimisation is done using Whittle®, pit shells are calculated based on the dilution, MCF and the appropriate gold price. These are used to estimate the Ore Reserve.

For the underground operations (Cuiabá, Lamego and Córrego do Sítio Sulphides), the gold price and operational costs are taken into consideration in determining Ore Reserves. Ore Reserves are scheduled and designed using Mine2-4D® computer software.

Mining parameters such as the mining method, minimum mining width, MCF, dilution and recovery are all applied in the process.

Ore Reserve					
as at 31 December 2008					
Brasil Mineração	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Corrego do Sitio	Proved	0.57	6.67	3.79	0.12
	Probable	2.12	5.96	12.62	0.41
	Total	2.69	6.11	16.42	0.53
Cuiaba	Proved	4.92	7.50	36.93	1.19
	Probable	3.26	6.14	20.04	0.64
	Total	8.19	6.96	56.98	1.83
Lamego	Proved	0.22	5.36	1.18	0.04
	Probable	0.88	5.77	5.10	0.16
	Total	1.10	5.69	6.28	0.20
Brasil Mineração	Total	11.98	6.65	79.68	2.56

Ore Reserve by-products: Sulphur (S)					
Brasil Mineração	Resource category	Tonnes million	Metric		Imperial
			Grade (%S)	Contained Sulphur (Mt)	Pounds million
	Proved	4.92	5.3	0.26	577
	Probable	3.26	5.5	0.18	398
Brasil Mineração	Total	8.19	5.4	0.44	974


INFERRED MINERAL RESOURCE IN PIT OPTIMISATION

Inferred Mineral Resources were used in the optimisation process and 0.32Moz are present in the LOM plan.


Ore Reserves below infrastructure

as at 31 December 2008		Metric			Imperial
Brasil Mineração	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Cuiaba	Total	1.95	6.28	12.27	0.39
Corrego do Sitio	Total	1.98	6.09	12.04	0.39
Lamego	Total	0.26	6.02	1.58	0.05
Brasil Mineração	Total	4.19	6.18	25.89	0.83

Brasil Mineração – Surface (Metric)

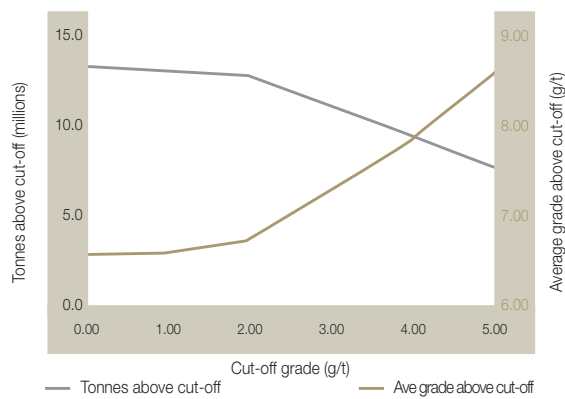

Brasil Mineração – Underground (Metric)

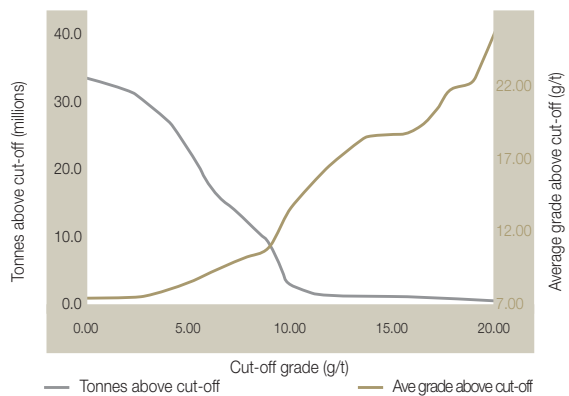

Competent persons

Brasil Mineração	Type	Name	Professional organisation	Registration number	Relevant experience
Corrêgo do Sítio	Mineral Resource	P de Tarso Ferreira	AusIMM	224828	23 years
	Ore Reserve	MG de Simoni	AusIMM	224826	16 years
Cuiabá	Mineral Resource	P de Tarso Ferreira	AusIMM	224828	23 years
	Ore Reserve	S Botelho	AusIMM	224833	22 years
Lamego MMV	Mineral Resource	P de Tarso Ferreira	AusIMM	224828	23 years
Other Resources	Mineral Resource	P de Tarso Ferreira	AusIMM	224828	23 years
	Ore Reserve	L Nunes Coelho	AusIMM	222679	6 years

Brazil

Serra Grande



GEOLOGY

The Serra Grande joint venture (50% attributable to AngloGold Ashanti) is co-owned with Kinross Gold Corporation. Serra Grande controls, or has an interest in, approximately 21,068ha in and around the Crixás mining district in the north-western areas of the Goiás State in central Brazil. Serra Grande is located 5km from the city of Crixás.

The operation comprises three underground mines, Mina III, Mina Nova and Mina Palmeiras, and one open pit mine in the outcrop of Mina III (between level 50 and surface). The processing circuit is equipped with grinding, leaching, filtration, precipitation and smelting facilities.


The gold deposits are hosted in a sequence of schists and volcanics occurring in a typical greenstone belt structural setting. The host rocks are of the Pilar de Goiás Group of the Upper Archaean located in the Crixás Greenstone Belt. Gold mineralisation is associated with quartz vein hosted in graphitic schists, massive and disseminated sulphides hosted in a sequence of hydrothermal schists and locally in dolomites. The ore shoots plunge downwards to the north-west and the dips varies between 6° and 35°. The deposits occur in the Rio Vermelho and Ribeirão das Antas formations.

The greenstone belt lithologies are surrounded by Archaean tonalitic gneiss and granodiorite. The metamorphosed sediments are primarily composed of quartz, chlorite, sericite, graphitic and garnetiferous schists. The carbonates have been metamorphosed to ferroan dolomite marble with siderite and ankerite veining having developed in the surrounding wallrock, usually associated with quartz veining. The basalts are relatively unaltered but do show pronounced stretching with the elongation of pillow structures evident. The ultra-basics

form the western edge of the belt and the basic volcanics and sediments form the core of the unit. The northern edge of the belt is in contact with a series of laminated quartzites and quartz sericite schists of the Lower Proterozoic Araxa Group and a narrow band of graphitic schists and intermediate to ultra-basic volcanics.

The Crixás greenstone belt comprises a series of Archaean to Palaeoproterozoic metavolcanics, metasediments and basement granitoids stacked within a series of north to north-east transported thrust sheet. Thrusting (D1) was accompanied by significant F1 folding/foliation development and progressive alteration in a brittle-ductile regime. D1 thrusting developed with irregular thrust ramp geometry, in part controlled by concealed early basin faults. The main Crixás orebodies are adjacent to a major north-north-west basement fault, and an inferred major east-west to south-east flexure in the original volcano-sedimentary basin. Early D1 alteration fluids were focused from south to north, adjacent to the north-north-west structural corridor, and up the main fault ramp/corner, to become dispersed to the east and north in foreland thrust fault zones.

Fluid alteration also diminished to the west away from the main fault flexure. A series of concealed east-west to north-west-south-east basement block faults may have provided secondary fluid migration, and development of early anti-formal warps in the thrust sheets; these structures probably define the quasi-regular spacing of significant mineralisation within the belt. The D1 thrust stack was gently folded by non-cylindrical folds. Gold mineralising fluids probably migrated during this event, with similar south-south-west to north-north-east migration, and focusing by bedding slip during folding. Gold mineralisation became minor and dispersed to the north and east along the frontal thrust flat zone. Concentrations of gold along the base of quartz vein may be due to the damming of fluids migrating upward along the layering in a westerly direction with dips of between 6° and 35°. The stratigraphy is overturned and thrust towards the east.

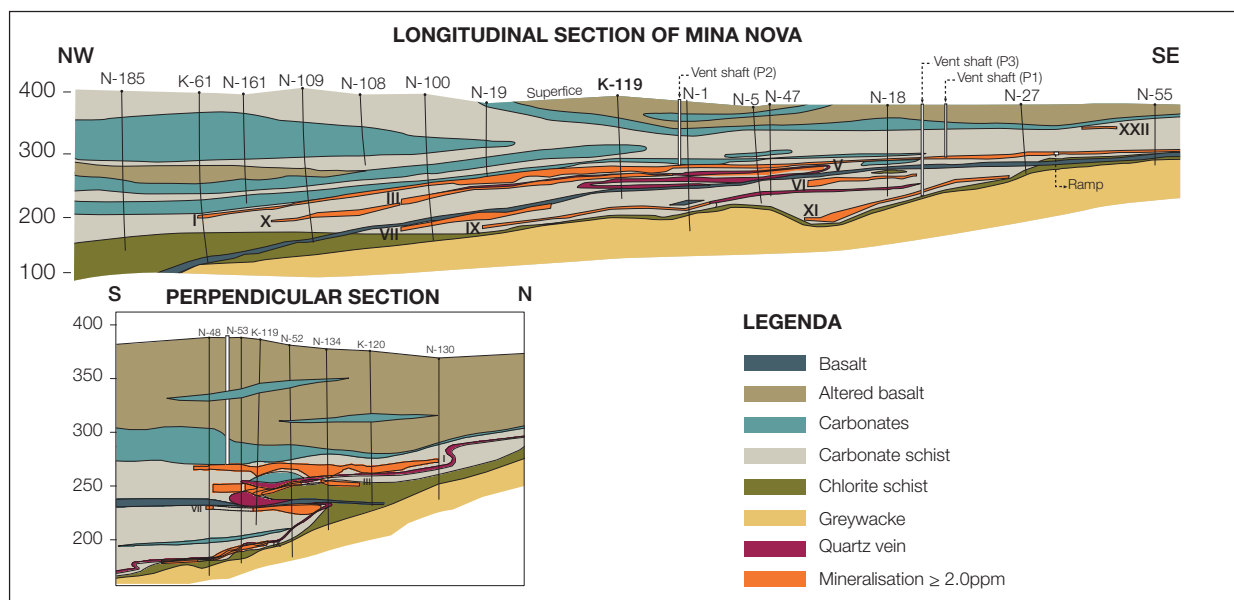


Brazil

Serra Grande cont.


Mineral Resource					
as at 31 December 2008					
Serra Grande	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Mina Nova	Measured	0.88	3.60	3.18	0.10
	Indicated	0.27	3.10	0.83	0.03
	Inferred	0.34	3.67	1.25	0.04
	Total	1.49	3.53	5.26	0.17
Open pit	Measured	0.77	3.97	3.06	0.10
	Indicated	0.25	2.86	0.72	0.02
	Inferred	–	–	–	–
	Total	1.02	3.70	3.78	0.12
Palmeiras	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	0.49	8.09	3.95	0.13
	Total	0.49	8.09	3.95	0.13
Pequizao	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	0.92	6.77	6.23	0.20
	Total	0.92	6.77	6.23	0.20
Total stockpiles	Measured	0.06	4.76	0.27	0.01
	Indicated	–	–	–	–
	Inferred	–	–	–	–
	Total	0.06	4.76	0.27	0.01
Mina 3	Measured	0.50	7.11	3.55	0.11
	Indicated	0.48	5.67	2.74	0.09
	Inferred	0.96	4.79	4.60	0.15
	Total	1.94	5.61	10.90	0.35
Serra Grande	Total	5.92	5.13	30.39	0.98

Exclusive Mineral Resource					
as at 31 December 2008					
Serra Grande	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	0.04	2.83	0.12	–
	Indicated	0.23	2.91	0.68	0.02
	Inferred	2.71	5.92	16.03	0.52
Serra Grande	Total	2.99	5.64	16.83	0.54

Serra Grande: Mineral Resource reconciliation 2007 vs 2008

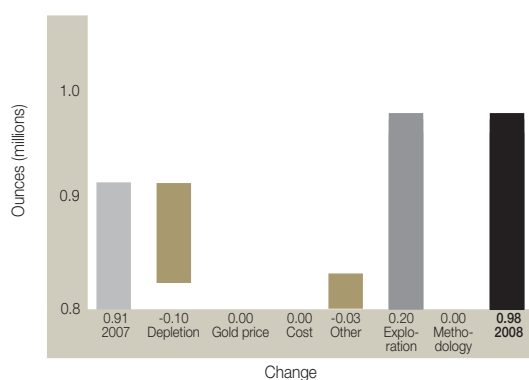

Serra Grande: Ore Reserve reconciliation 2007 vs 2008

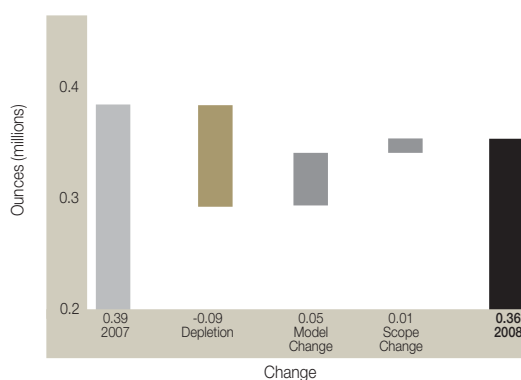

Ore Reserve


as at 31 December 2008

Serra Grande	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Mina Nova	Proved	0.79	3.24	2.56	0.08
	Probable	0.21	3.00	0.62	0.02
	Total	1.00	3.19	3.19	0.10
Open pit	Proved	0.82	3.64	2.98	0.10
	Probable	0.19	2.36	0.44	0.01
	Total	1.01	3.40	3.42	0.11
Total stockpiles	Proved	0.06	4.76	0.27	0.01
	Probable	–	–	–	–
	Total	0.06	4.76	0.27	0.01
Mina 3	Proved	0.39	5.98	2.33	0.08
	Probable	0.37	5.58	2.04	0.07
	Total	0.76	5.79	4.37	0.14
Serra Grande	Total	2.82	3.99	11.25	0.36

INFERRED MINERAL RESOURCE IN PIT OPTIMISATION

Inferred Mineral Resources were used in the optimisation process and 0.21Moz from Mina 3 are present in the LOM plan.

Serra Grande – Surface (Metric)

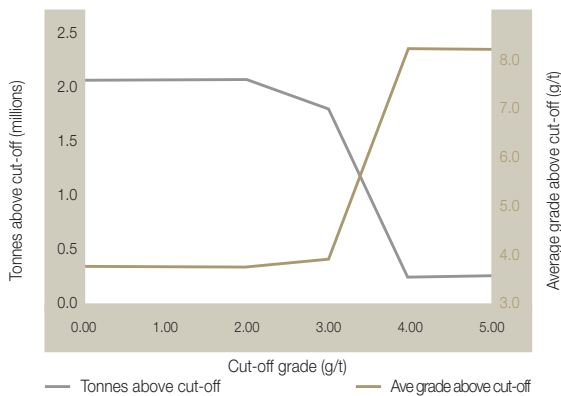


Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	EM de Araujo	AusIMM	224825	20 years
Ore Reserve	EM de Araujo	AusIMM	224825	20 years

Colombia

Regional overview

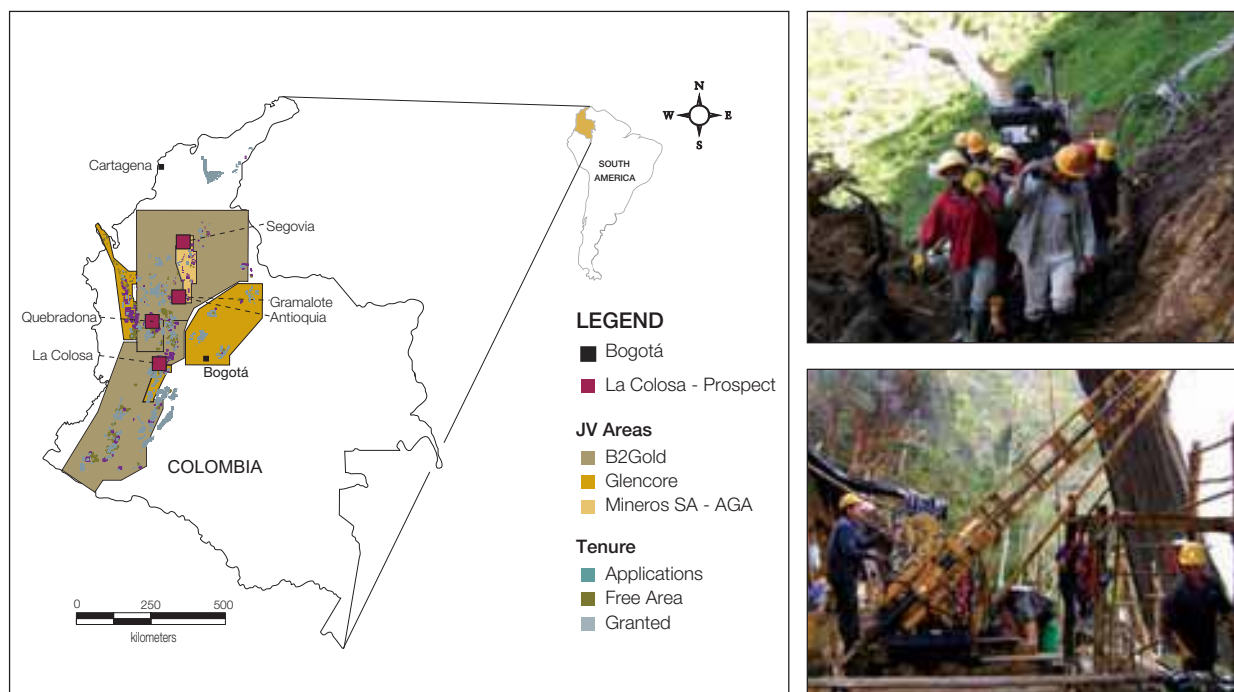

In 2003, AngloGold Ashanti was the first company to instigate a systematic grassroots exploration program in Colombia. Since the start of exploration, AngloGold Ashanti has staked a total of 13.9 million hectares of exploration claims countrywide. Of these, 11.2 million hectares have been explored with systematic stream sediment sampling, prospecting and in some areas, airborne geophysics. As a result of this work 423 mineral contracts covering 825,025 ha are active with follow up work from drill target definition through pre-feasibility studies either operated 100% by AngloGold Ashanti or in joint ventures with partners, B2Gold, Mineros S.A, Mega Uranium and Glencore. AngloGold Ashanti has thus far relinquished 10.4 million hectares and plans to complete first stage exploration on the remaining 2.7 million hectares in 2009. To date the program has generated 42 drill targets of which 24 have been drilled with two resulting in significant discoveries, Gramalote and La Colosa.

Details of average drillhole spacing and type in relation to Mineral Resource classification

Mine/ Project	Category	Spacing m (- x -)	Type of drilling				Comments
			Diamond	RC	Blasthole	Other	
Gramalote	Measured	-	-	-	-	-	
	Indicated	-	-	-	-	-	
	Inferred	70 x 100	✓	-	-	-	Approximate drillhole spacing
	Grade control	-	-	-	-	-	
La Colosa	Measured	-	-	-	-	-	
	Indicated	-	-	-	-	-	
	Inferred	100 x 100	✓	-	-	-	Additional geological holes were drilled at different spacings and angles, HQ to NQ size
	Grade control	-	-	-	-	-	

Reconciliation of Mineral Resource and Ore Reserve

as at 31 December 2008			Changes in gold contained							
Mine	Percentage attributable	Category	2007	Depletion ⁽¹⁾	Model change ⁽²⁾	Moz		Net change		Comment
						Scope change ⁽³⁾	2008	Diff	%	
Gramalote	49%	Resource	1.59	-	-	(0.55)	1.04	(0.55)	(35)	Reduced ownership from 75% to 49%
		Reserve	-	-	-	-	-	-	-	
La Colosa	100%	Resource	-	-	12.32	-	12.32	12.32	-	Conceptual study was completed in 2008 and project has now advanced to pre-feasibility stage
		Reserve	-	-	-	-	-	-	-	
Total		Resource	1.59	-	12.32	(0.55)	13.36	11.77	740	
		Reserve	-	-	-	-	-	-	-	

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.
2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.
3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.



Colombia

Gramalote



BACKGROUND

The Gramalote project is located 120 road kilometres west-north-west of Medellin, the capital of the Antioquia department. Site access is by paved road from Medellin (2.5 hours) and from Bogota (7 hours).

The Gramalote project presently is a joint venture with Vancouver-based B2Gold Corp. In 2005, Sociedad Kedadha (AngloGold Ashanti's former subsidiary now called AngloGold Ashanti Colombia SA) entered into a joint venture agreement with the Colombian-based Grupo Nus. As part of the joint venture agreement, Sociedad Kedadha could earn a 75% interest in the Gramalote property by completing cash payments, complying with specific work expenditures and presenting a feasibility study on or before July 2010. In August 2007, Vancouver-based B2Gold Corp. purchased the rights to the Grupo Nus option agreement, including the remaining 25% interest in the Gramalote property from the Grupo Nus. In November 2007, AngloGold Ashanti in turn decided to reduce its interest in the Gramalote property to 49% and offered B2Gold the opportunity to become the project operator with overall responsibility for taking the project through feasibility. During 2008, B2Gold drilled 30,131m on the global Gramalote project, including drill investigations at Gramalote Ridge (mostly Mineral Resource infill work), La Trinidad (7,019m in 20 holes), El Balzal, La Reina, El Topazio and La Malasia.

GEOLOGY

The Gramalote area is underlain by medium to coarse-grained biotite +/- hornblende tonalite and granodiorite of the Paleocene to Cretaceous Antioquian batholith. Tonalite from the Gramalote exploration adit gave zircon ages of 59 ± 1.2 ma. Magmatism, structural events and mineralisation are intimately related.

The location of drill targets is controlled by N70-75E striking steeply south-east dipping transfer zones developed between two sub-regional faults (Rio Nus, Quebrada Socorro).

On the local prospect scale, extensional domains with quartz veinlets and compressional domains with shear zones have formed.

There are two principal mineralised sectors at Gramalote are Las Torres and Cerro Gramalote. Both occur in extensional domains striking N20-30W and dipping 75° to 80° south-west. Gold grades of more than 1g/t often correlate with increased fracturing (>9 fractures/veinlets per metre) and the dominant alteration is potassic K-feldspar. Quartz-sericite overprints and quartz-pyrite-chalcocopyrite-molybdenite+gold veinlets follow subsidiary structures.

Shear zone domains strike N50-60E and dip 75-80SE. Individual shears zones are often up to 40m apart and north-south veins follow extension fractures between them. These veins have been targets for small-scale mining at Los Mangos. Alteration in shear zone domains is dominantly (quartz-) sericite with remnant potassic K-feldspar alteration. Veinlets are quartz-molybdenite-chalcocopyrite-pyrite+sphalerite+gold.


In summary, three styles of alteration-mineralisation are distinguished at Gramalote: Potassic K-feldspar alteration with associated veinlets and sporadically veins; (overprinting) quartz-sericite alteration with veins and syn-deformation veinlets; and Sericite/chlorite-quartz-calcite/illite-smectite alteration on reactivated fault planes.

Gold grades are attractive, especially in areas characterised by potassic K-feldspar dominated alteration and quartz-pyrite-chalcocopyrite veinlets. Las Torres and Cerro Gramalote have been drilled on 100m lines. El Barzal has been partially drill tested and the La Concha prospect remains undrilled.

MINERAL RESOURCE ESTIMATION

At Gramalote, some 12,551m of diamond drilling (43 holes) has been used to support the calculation of an Inferred Mineral Resource.

The Inferred Mineral Resource estimate was generated using an indicator kriging method. All available geological drillhole, surface and underground mapping information has been validated for use in the modelling process.

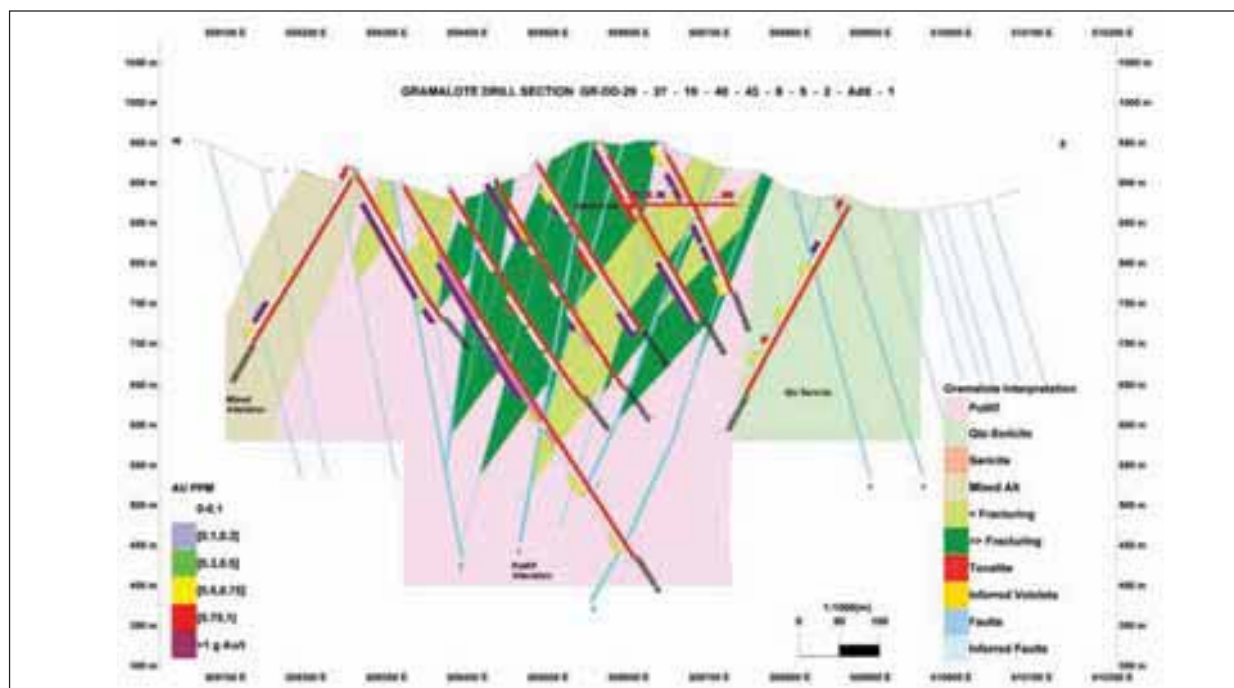

Colombia


Gramalote cont.

Mineral Resource

as at 31 December 2008

Gramalote	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	28.35	1.14	32.33	1.04
Gramalote	Total	28.35	1.14	32.33	1.04

Gramalote: Mineral Resource reconciliation 2007 vs 2008

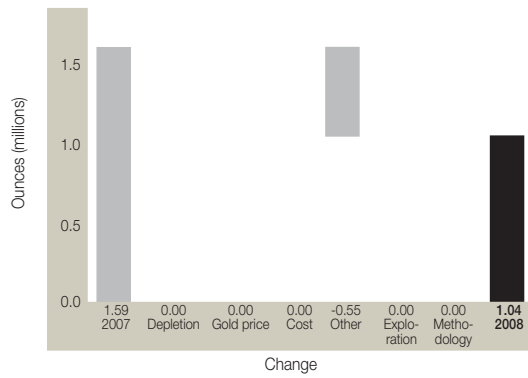

Competent person

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	R Jahoda	AusIMM	990544	20 years



Colombia

La Colosa



La Colosa is a significant 'in-house' greenfields project discovered by AngloGold Ashanti's Colombian greenfields exploration team during 2006. The project is 100% owned by AngloGold Ashanti Ltd. and located 150km west of Colombia's capital city, Bogota and 30km west of the major town, Ibague, in the department of Tolima.

GEOLOGY

The La Colosa copper-poor porphyry gold system is genetically associated with Miocene porphyritic intrusive centres intruded into Paleozoic schists. The highest grade gold mineralisation is closely associated with a suite of early porphyry intrusions/breccias with potassic and sodic-calcic alteration, 5% pyrite and traces of chalcopyrite and molybdenite. The coherent body suffered little dilution by intermineral/postmineral phases or fault propagation. Late stage alteration causing removal of gold is virtually absent.

The early porphyry stage is divided into three phases. The earliest is crowded diorite porphyry (E1) and is volumetrically minor. The two principal early diorite porphyries, both later than the crowded phase, comprise coarse grained (E2) and fine-grained (E3) varieties. The coarse-grained phase is characterised by prominent plagioclase phenocrysts about 0.5cm across, whereas the fine-grained phase contains homogeneously distributed, millimetre-sized plagioclases.

The inter-mineral-stage diorite porphyry intrusions are divided into two phases: coarse-grained (I1) and fine-grained (I2), both of which are texturally similar to the two main early-stage phases.

The late-mineral dacite porphyry is typified by rounded quartz phenocrysts, locally up to 1cm across.

Contacts between porphyry phases are commonly characterised by broad zones of intrusion breccias, i.e. a concentration of xenoliths of earlier porphyry in a later one. The texture of the breccias is commonly diffuse implying varied degrees of assimilations of the earlier by later phases.

Colombia

La Colosa *cont.*

The most abundant intrusion breccia logged comprises clasts of the early, coarse-grained porphyry (E2) in a matrix of fine-grained porphyry (E3) and is called EBX2. The intrusion breccia may occur either as vertically continuous bodies along the contacts between the two porphyry phases or internally between within the fine-grained variety. Similar intrusion breccia was also formed at the inter-mineral porphyry stage, where the fine-grained phase cements clasts of the coarse-grained phase (IBX breccias).

A distinctive intrusion breccia occurs as a 5m to >15m wide rind to the porphyry stock, where it consists of variously orientated schist, hornfels and intrusive clasts in an early, fine-grained porphyry matrix (SBX breccias).

The early porphyry intrusion is elliptical in shape with a known maximum axis of at least 1,200m and a minimum east-west axis of 400m. The early porphyry intrusion is more abundant at shallow depths and is intruded by the inter-mineral porphyry intrusion. The early porphyry, therefore, caps and flanks the deeper inter-mineral porphyry.

The late-mineral dacite porphyry occurs as a series of dykes, all more than 40m thick but showing continuity over at least 600 vertical metres. These dykes are assumed to be lateral offshoots of a ~1-km² mapped body of dacite porphyry.

ALTERATION AND MINERALISATION

The paragenesis of the main alteration/mineralisation mineral assemblage observed at Colosa starts with pervasive sodic-calcic alteration overprinted by potassic alteration and in turn cut by a sodic-calcic event. The two dominant alteration types are the potassic and second sodic-calcic. Potassic alteration, biotite and subordinate K-feldspar, occurs mainly as a pervasive replacement of the porphyries, especially the early phases. Early hydrothermal biotite is fine grained and commonly pale brown, suggesting the addition of phlogopitic (magnesium-rich) biotite. The second sodic-calcic alteration clearly overprints the potassic assemblage and is largely confined to irregular, centimetre-scale patches and well defined veinlets. The patches and veinlets contain epidote, actinolite and chlorite, typically with white, 'albite-rich' haloes. Intermediate argillic and sericitic alteration are only weakly developed and only form mappable zones in the dacite and in the northern limit of the deposit.

The three early porphyries – crowded, coarse-grained and fine-grained – and their associated intrusion breccias appear to have been altered and mineralised at the same time. There is scant evidence for veinlet introduction between the three intrusive events. Crowded and coarse-grained porphyry clasts making up the intrusion breccias do not appear to have confined veinlets. The gold content of the three early porphyry phases is similar.

The veinlets at Colosa appear to span the potassic to sodic-calcic alteration events. The earliest veinlets are composed of only biotite. However, most early veinlet generations are composed of quartz, magnetite, pyrite, pyrrhotite plus minor chalcocopyrite and molybdenite. The veinlets may be either quartz or magnetite dominated. The quartz-rich veinlets have the characteristics of both A- and B-types in porphyry copper systems. Where molybdenite is present, it commonly occurs along both edges of the veinlets, a widely observed B-type feature.

The main control of gold grade in the diorite/dacite intrusive stock is the intrusive phase where the mineralisation is hosted. Early intrusive phases present the highest and more consistent gold grade (average: >1.1 ppm). The inter-mineral diorite has average gold grades of less than 0.7 ppm, the late dacite phase generally only has >300ppb gold, grades close to the contact with early diorite phases.

Within the gold grade variation that characterise each intrusive phase, gold grades presents a second order correlation with the alteration assemblage. The Ca-Na and K alteration with or without chloritic alteration have the best gold grades. Areas with intense illite alteration generally have average gold grades less than 0.3 ppm. The contact breccias and hornfels developed at the contact between porphyritic rock and schist present a mineralised haloe of at least 60m with an average gold grade of >1 ppm.

GOLD DEPARTMENT

Gold grains vary from almost pure gold to a lesser amount of gold-silver telluride. The chemical composition of Au-Ag-Te grains is variable. The gold grains are generally fine grained around 15 microns. Coarse grained gold (116 microns) was found in samples from metamorphic rocks. Gold grains occur both liberated and 'locked' in sulphides and silicates. The percentage is not clearly established, but a significant amount of gold is associated with silicates such as K-feldspar and plagioclase. Sulphide minerals associated with gold are dominantly pyrite and, in a much lesser amount, pyrrhotite and arsenopyrite.

MINERAL RESOURCE ESTIMATION

At La Colosa, some 17,039m of diamond drilling (59 holes) has been used to support the estimation of an Inferred Mineral Resource. A mineralised envelope was prepared from composites >0.5 ppm Au and confirmed by indicator kriging and boundary analysis.


Gold grades were estimated using ordinary block Kriging methodology. Kriging was performed on a parent block sized 50m (X) by 50m (Y) by 10m (Z) for lithological domains (wireframes) in the mineralised envelope and for the waste surrounding mineralisation. Quantitative Kriging neighbourhood analysis (QKNA) was used to optimise search range and block discretisation. All available geological drillhole, surface sampling and mapping information has been validated for use in the modelling process.

Mineral Resource exclusive of Ore Reserve

as at 31 December 2008

La Colosa	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	381.42	1.00	383.12	12.32
La Colosa	Total	381.42	1.00	383.12	12.32

La Colosa: Mineral Resource reconciliation 2007 vs 2008

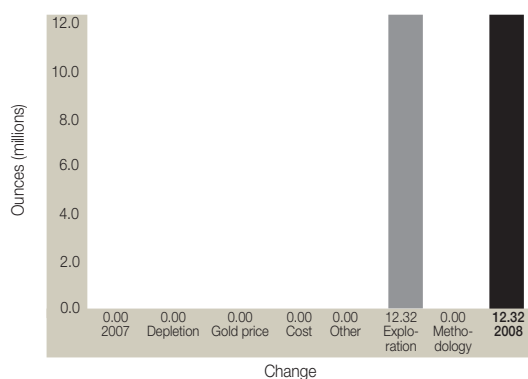


Competent person

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	R Jahoda	AusIMM	990544	20 years

Democratic Republic of Congo

Regional overview

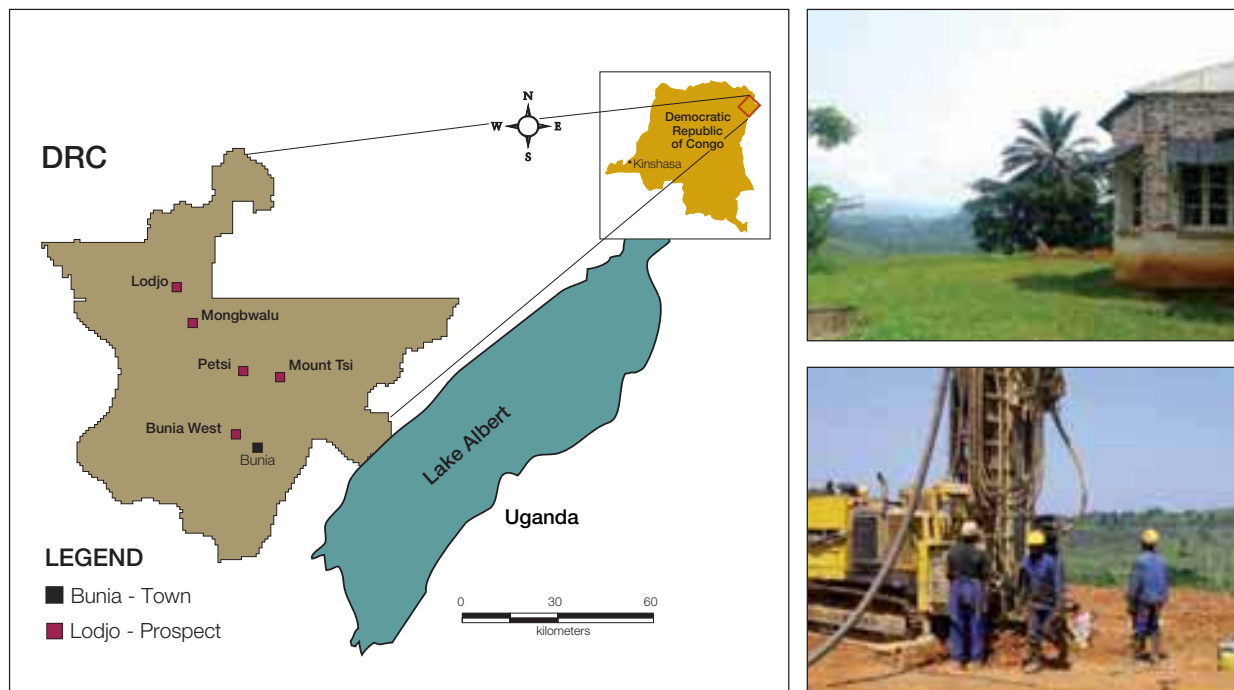

The Mongbwalu Project is one of AngloGold Ashanti's most important exploration projects and is situated within the 10,000km² covered by Concession 40 in the Ituri Province of north-eastern Democratic Republic of Congo (DRC). Concession 40 has a rich history of gold occurrences and cover the entire Kilo Archaean granite-greenstone belt that extends approximately 850km west-northwest of Lake Albert.

Details of average drillhole spacing and type in relation to the Mineral Resource classification

Mine/Project	Category	Spacing m (- x -)	Type of drilling				Comments
			Diamond	RC	Blasthole	Other	
Mongbwalu	Measured	-	-	-	-	-	
	Indicated	-	-	-	-	-	
	Inferred	50 x 50	✓	✓	-	-	
	Grade control	-	-	-	-	-	

Reconciliation of Mineral Resource and Ore Reserve

as at 31 December 2008			Changes in gold contained						
Mine	Percentage attributable	Category	2007	Moz			2008	Net change	
				Deple- tion ⁽¹⁾	Model change ⁽²⁾	Scope change ⁽³⁾		Diff	% Comment
Mongbwalu	86.2%	Resource	2.52	-	-	-	2.53	-	-
		Reserve	-	-	-	-	-	-	-
Total		Resource	2.52	-	-	-	2.53	-	-
		Reserve	-	-	-	-	-	-	-

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.
2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.
3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.



Democratic Republic of Congo

Mongbwalu



MONGBWALU

Concession 40 is held in a joint venture between AngloGold Ashanti Kilo (AGAK) and OKIMO, a governmental body which currently holds a 13.8% non-contributory share. AGAK is 100% owned by AngloGold Ashanti Ltd. The findings of the DRC Minerals Review Commission have resulted in AngloGold Ashanti and the AGAK joint venture engaging the DRC government to seek resolution and secure the rights to Concession 40.

Exploration activities over the Concession 40 licence were suspended in November 2008 following the deteriorating security situation which led to the precautionary withdrawal of most non-essential staff from the concession.

Most of AngloGold Ashanti's exploration activities in Concession 40 have focused on the delineation of Mineral Resources in the vicinity of the abandoned Adidi-Kanga, Nzebi, and Senzere gold mines. These old mines are collectively centred around the village of Mongbwalu, situated 48km north-west of the regional town of Bunia and 320km south-east of Kampala in neighbouring Uganda.

The most prospective parts of the greenstone belt have been covered by a total of 5,575km² of airborne magnetic and radiometric surveys. Three fly camps have been established as bases for the regional field work.

GEOLOGY

Granitoids are the predominant rock type within the Kilo granite-greenstone belt. The granitoids contain rafts of Kibalian amphibolites and basic talc carbonate schists that have been intruded by diorite-tonalite-granodiorite assemblages. The Mongbwalu resource mineralisation is hosted in multiple, shallow dipping mylonite bodies that average 25m in width. Within the mylonite zones, the gold is primarily concentrated in boudinaged quartz

veins that appear to be orientated sub-parallel to the mylonite zones and their immediate wall-rock. The alteration assemblage consists of chlorite-biotite-quartz-sericite and mineralisation occurs as pyrite-pyrrhotite (<2%) and free gold.

The easterly dipping mylonite zones are continuous throughout the area drilled, with the most prospective zone located close to the old Adidi Mine. Two north-south trending faults have offset the mineralisation and kept the mineralisation within 150m to 200m of the surface. The mylonite can be traced along a strike length of approximately 7km and given its shallow dip there is good potential to find additional ounces close to surface.

MINERAL RESOURCE ESTIMATION

AngloGold Ashanti began drill testing of the Mineral Resource potential of the Mongbwalu area in mid-2005 and by the end of 2006, the broader Mongbwalu area (Nzebi-Adidi-Kanga-Pluto sectors) had been diamond drilled on a 200m x 200m grid. The program covered an area 2.2km by 2.7km centred over the southern part of the Adidi mine.

From this drilling, distinct zones with potentially economic grades of gold in quartz-veins were delineated. Infill RC and diamond drilling on 50m x 50m centres was undertaken during 2007 to cover those areas of maximum potential to host near surface open-pit extractable or shallow underground extractable mineralisation. The aim was to define an initial Inferred Mineral Resource by the end of 2007. Data obtained from a total of 87,933m of drilling was used for Mineral Resource modelling and estimation.

The principle Mongbwalu Mylonite horizons and other important geological units defined by drillhole logging and interpretation were modelled using conventional 3D wireframing techniques and Datamine® software. To define the Inferred Mineral Resource, ore envelopes were created using manual wireframing in Datamine® at cut-off grades of 0.5g/t Au and 3.0g/t Au. Following geostatistical evaluation of the drillhole assay database, gold grades were interpolated into a 3D block-model incorporating the principle geological units and ore envelopes using ordinary Kriging to define the Inferred Mineral Resource, at a cut-off grade of 0.5g/t.


Initial scoping level mining metallurgical, geotechnical, hydrogeological, environmental, socio-political and infrastructural engineering studies were undertaken in parallel with the drilling to support the Mineral Resource estimate.

Mineral Resource					
as at 31 December 2008					
Mongbwalu	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	29.25	2.69	78.53	2.52
Mongbwalu	Total	29.25	2.69	78.53	2.52

Democratic Republic of Congo

Mongbwalu cont.

Mongbwalu: Mineral Resource reconciliation
2007 vs 2008

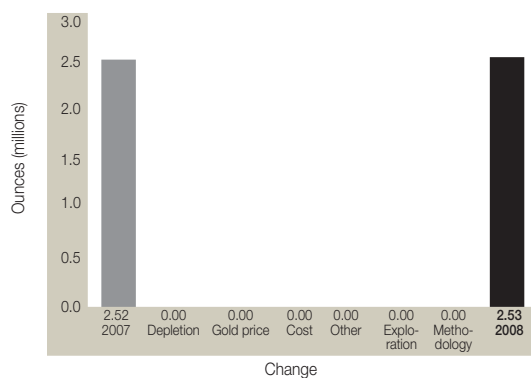


Competent person

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	M O'Brien	AusIMM	206669	29 years



Ghana

Regional overview

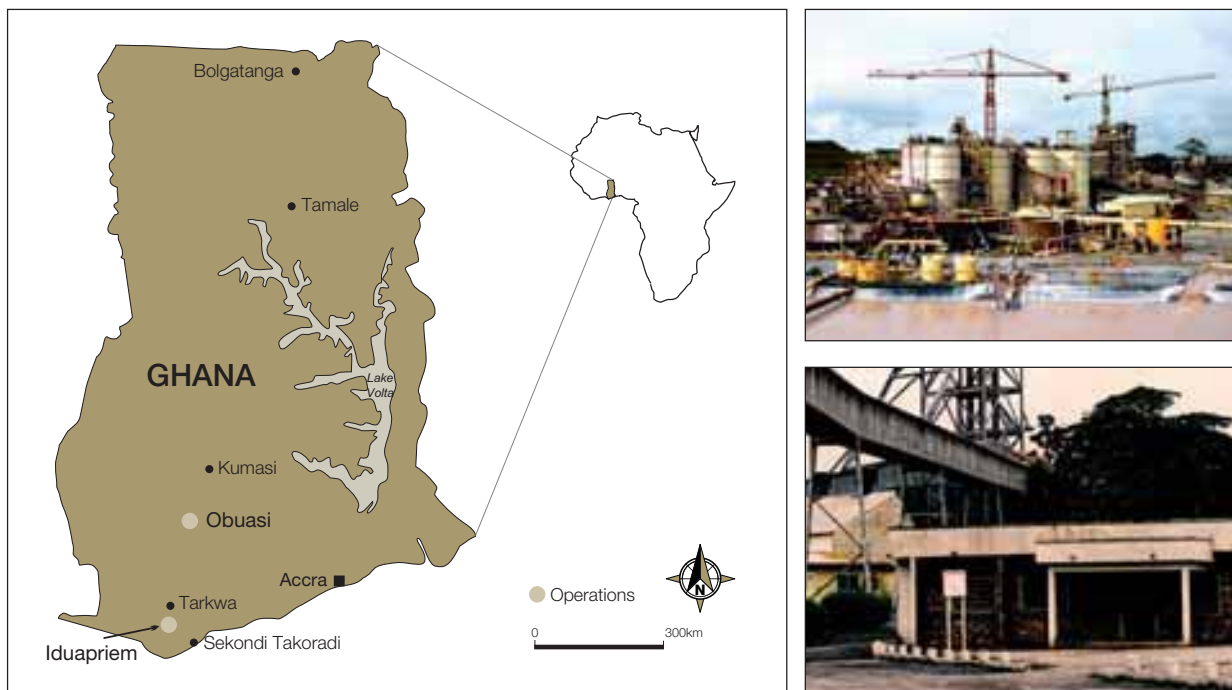

AngloGold Ashanti has two mines in Ghana, Obuasi which has both surface and underground operations and Iduapriem, an open pit mine. Obuasi and Iduapriem are both wholly owned by AngloGold Ashanti.

Mineral Resource and Ore Reserve gold price

	Units	2008	2007
Gold price – Mineral Resource	US\$/oz	1,000	700
Gold price – Ore Reserve	US\$/oz	720	600

Details of average drillhole spacing and type in relation to Mineral Resource classification

Mine/ Project	Category	Spacing m (- x -)	Type of drilling				Comments
			Diamond	RC	Blasthole	Other	
Iduapriem	Measured	50 x 50 and 100 x 50	✓	✓	-	-	
	Indicated	50 x 75 and 100 x 75	✓	✓	-	-	
	Inferred	50 x 100 and 100 x 100	✓	✓	-	-	
	Grade control						

Ghana

Regional overview *cont.*

Details of average drillhole spacing and type in relation to Mineral Resource classification (cont.)

Mine/ Project	Category	Spacing m (- x -)	Type of drilling				Comments
			Diamond	RC	Blasthole	Other	
Obuasi	Measured	20 x 0, 20 x 20 and 50 x 50	✓	✓	-	-	
	Indicated	30 x 0, 30 x 30 and 50 x 50, 60 x 0, 60 x 60	✓	✓	-	✓	Both air core and RC, are drilled on offset patterns
	Inferred	90 x 0, 90 x 90 and 120 x 0	✓	✓	-	✓	Air core and RC and some diamond holes. Both air core and RC, are drilled on offset patterns.
	Grade control		-	-	-	-	

Ore Reserve modifying factors

as at 31 December 2008

Mine	Gold price used USD\$/oz	Cut-off grade g/t Au	Stoping width cm	Dilution %	Mine call factor (MCF)	Metal-lurgical Recovery factor %	Comments
Iduapriem							
Ajopa	600	0.6-0.71	-	7-8	100	94.5-97	
Block 3W	600	0.6-0.71	-	7-8	100	94.5-97	
Block 5	600	0.6-0.71	-	7-8	100	94.5-97	
Blocks 7 and 8	720	0.6-0.71	-	7-8	100	94.5-97	
Full Grade Ore stockpile	720	0.6-0.71	-	7-8	100	94.5-97	
Obuasi							
KMS 50-60	720	2.2-4.0	-	12	88	83	
Sansu Low Grade Sulphides	720	2.2-4.0	-	12	88	83	
Upper Mine	720	2.2-4.0	-	12	88	83	
Above 50 Base	720	2.2-4.0	-	12	88	83	
Other Surface Resources	720	-	-	-	100	47	
Tailings – Kokoteasua	720	-	-	-	100	25	
Heap Leach	720	-	-	-	100	47	
Surface Oxides	720	-	-	-	100	47	
Surface Sulphides	720	-	-	-	100	47	

Reconciliation of Mineral Resource and Ore Reserve

as at 31 December 2008			Changes in gold contained								
Mine	Percentage attributable	Category	2007	Depletion ⁽¹⁾	Model change ⁽²⁾	Moz		2008	Net change		Comment
						Scope change ⁽³⁾	2008		Diff	%	
Iduapriem	100%	Resource	3.50	(0.23)	(0.58)	1.02	4.87	1.37	39	Increase due to higher resource gold price and remodelling of block 7&8	
		Reserve	2.42	(0.21)	0.34	0.01	2.55	0.14	6	Pit expansion due to higher gold price	
Obuasi	100%	Resource	33.43	(0.66)	2.18	2.40	37.35	3.92	12	Exploration below 50 level	
		Reserve	8.33	(0.60)	2.06	(0.13)	9.66	1.33	16	Increase due to changed mine design and schedule	
Total		Resource	36.93	(0.89)	2.76	3.42	42.22	5.29	14		
		Reserve	10.75	(0.81)	2.39	(0.11)	12.22	1.47	14		

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.
2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.
3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.



Ghana

Iduapriem



GEOLOGY

The Iduapriem mine is situated in the western region of Ghana, some 85km north of the coastal city of Takoradi, and 10km south-west of Tarkwa. Iduapriem is an open-pit mine which commenced mining operations in 1992. Its processing facilities include a carbon-in-pulp (CIP) plant.

The Iduapriem gold mine is located along the southern end of the Tarkwa basin. The mineralisation is contained in the Proterozoic Banket Series conglomerates within the Tarkwaian System. The outcropping Banket Series in the mine area form prominent arcuate ridges extending southwards from Tarkwa, westwards through Iduapriem and northwards towards Teberebie. The gold is particulate and free milling. Mineralogical studies indicate that the grain size of native gold particles ranges between 2 microns and 500 microns (0.002 to 0.5mm) and averages 130 microns (0.13mm). Sulphide minerals are present only at trace levels and are not associated with the gold.

MINERAL RESOURCE ESTIMATION

All geological interpretations are used to produce a three-dimensional wire frame model of the orebody using Datamine[®] software. A block model comprising of 25m x 5m x 6m blocks is used within the geological model outlines and where appropriate, selective sub-celling is used for definition on the geological and mineralisation boundaries. The geostatistical techniques used for grade interpolation into the blocks include ordinary kriging and inverse distance squared (ID2) methods.

Mineral Resource

as at 31 December 2008

Iduapriem	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Ajopa	Measured	3.65	2.18	7.96	0.26
	Indicated	1.81	2.07	3.74	0.12
	Inferred	2.04	2.09	4.26	0.14
	Total	7.50	2.13	15.97	0.51
Block 3W	Measured	–	–	–	–
	Indicated	3.12	1.38	4.31	0.14
	Inferred	1.76	1.18	2.07	0.07
	Total	4.88	1.31	6.38	0.21
Block 5	Measured	6.59	1.22	8.03	0.26
	Indicated	1.95	1.27	2.48	0.08
	Inferred	2.77	1.29	3.57	0.12
	Total	11.31	1.25	14.09	0.45
Blocks 7 and 8	Measured	20.96	1.41	29.55	0.95
	Indicated	37.87	1.74	65.73	2.11
	Inferred	4.66	1.59	7.40	0.24
	Total	63.48	1.62	102.69	3.30
Total stockpiles	Measured	2.66	1.17	3.11	0.10
	Indicated	–	–	–	–
	Inferred	16.50	0.56	9.32	0.30
	Total	19.16	0.65	12.43	0.40
Iduapriem	Total	106.32	1.43	151.55	4.87

Mineral Resource exclusive of Ore Reserve

Iduapriem	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	3.64	1.23	4.47	0.14
	Indicated	21.62	1.63	35.26	1.13
	Inferred	27.72	0.96	26.63	0.86
Iduapriem	Total	52.98	1.25	66.36	2.13


The Exclusive Mineral Resource is derived predominately from Blocks 3W, 5, 7 & 8 and Ajopa. It is partly due to Inferred Mineral Resources within the optimised Ore Reserve pit shell. It is also due to Mineral Resources being located outside the Ore Reserve pit shell but within the optimised Mineral Resource pit shell (mainly down-dip extensions of the ore zones).

A resource conversion drilling programme will be carried out in 2010 and 2011 to convert the Inferred Mineral Resources to the Indicated and Measured categories in order to qualify them to be included in the Ore Reserve.


Ghana

Iduapriem cont.

Iduapriem: Mineral Resource reconciliation
2007 vs 2008

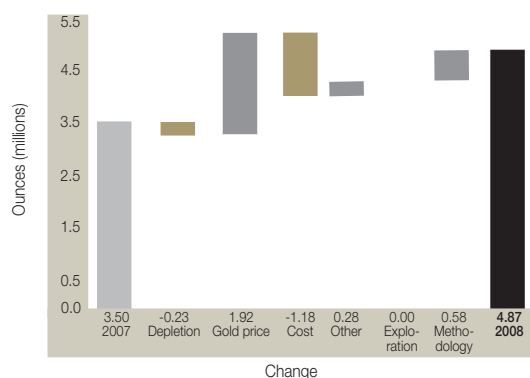

Iduapriem: Ore Reserve reconciliation
2007 vs 2008

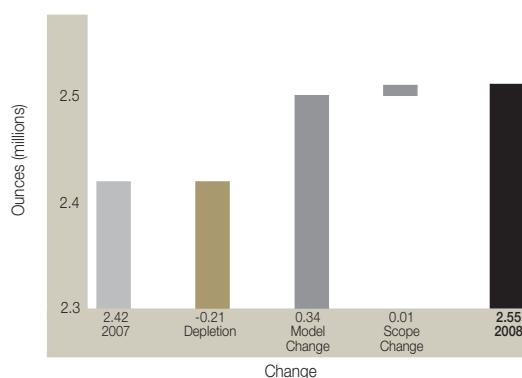

ORE RESERVE ESTIMATION


Pit optimisation is done using the relevant economic assumptions, geotechnical parameters and mining assumptions. Iduapriem uses NPV Scheduler[®] and the ultimate pit shell is based on optimal criteria. The subsequent pit design is done using Datamine[®] software, which forms the basis for the Ore Reserve.

Ore Reserve

as at 31 December 2008

Iduapriem	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Ajopa	Proved	3.09	2.13	6.57	0.21
	Probable	0.94	1.85	1.75	0.06
	Total	4.03	2.06	8.32	0.27
Block 3W	Proved	–	–	–	–
	Probable	1.63	1.49	2.42	0.08
	Total	1.63	1.49	2.42	0.08
Block 5	Proved	6.09	1.17	7.15	0.23
	Probable	1.82	1.19	2.16	0.07
	Total	7.91	1.18	9.31	0.30
Blocks 7 and 8	Proved	18.37	1.33	24.48	0.79
	Probable	18.75	1.70	31.81	1.02
	Total	37.12	1.52	56.30	1.81
Total stockpiles	Proved	2.68	1.16	3.11	0.10
	Probable	–	–	–	–
	Total	2.68	1.16	3.11	0.10
Iduapriem	Total	53.37	1.49	79.45	2.55

Iduapriem – Surface (Metric)

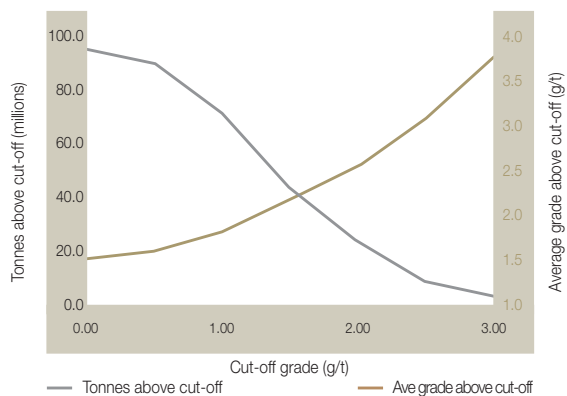

Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	K Osei	AusIMM	112723	14 years
Ore Reserve	EB Boakye	AusIMM	222459	22 years



Ghana

Obuasi



LOCATION



The Obuasi mine is located in the Ashanti region of Ghana, some 80km from Kumasi. It is an underground mine extending over 9km on strike and mining to a depth of 1,500m below surface. Large-scale open-pit mining took place between the years 1990 and 2000. The mine has three active treatment plants: the sulphide treatment plant to process underground ore, the tailings treatment plant to handle tailings reclamation operations and an oxide treatment plant to treat other small volumes from surface sources.

GEOLOGY

The gold deposits at Obuasi are part of a prominent gold belt of Proterozoic (Birimian) volcano-sedimentary and igneous formations. These deposits extend for a distance of approximately 300km, in a north-east/south-west trend, in south-western Ghana. Obuasi mineralisation is shear-zone-related and there are three main structural trends hosting gold mineralisation namely the Obuasi trend, the Gyabunsu trend and the Binsere trend. The underground mine is situated on the Obuasi trend.

Two main ore types are mined, namely quartz veins and sulphide ore. The quartz vein type consists mainly of quartz with free gold in association with lesser amounts of various metal sulphides containing iron, zinc, lead and copper. The gold particles are generally fine-grained and are occasionally visible to the naked eye. This ore type is generally non-refractory.

Sulphide ore is characterised by the inclusion of gold in the crystal structure of a sulphide mineral. The gold in these ores is fine-grained and often locked in arsenopyrite. Higher gold grades tend to be associated with finer grained arsenopyrite crystals. Other prominent minerals include quartz, chlorite and sericite. Sulphide ore is generally refractory.

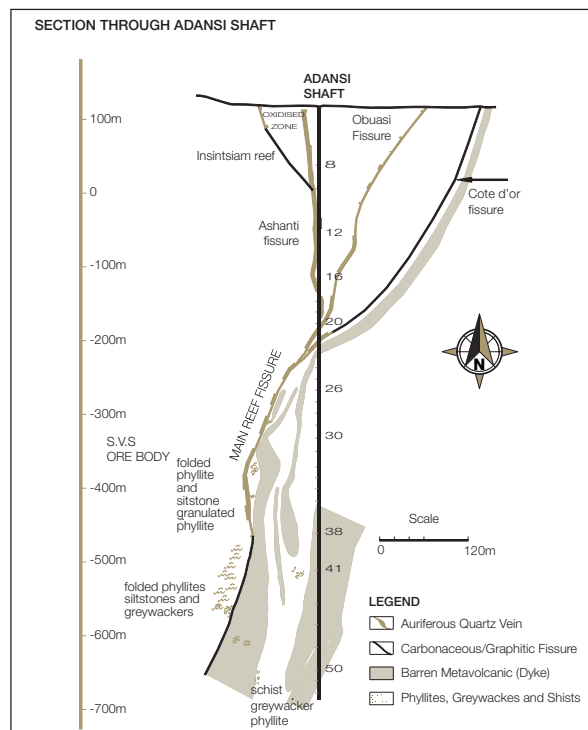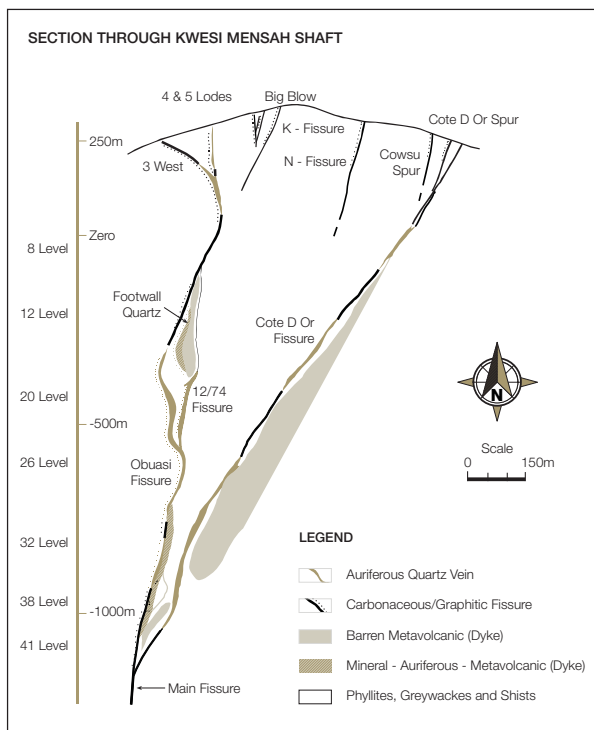

MINERAL RESOURCE ESTIMATION

Mineral Resource estimates are derived from interpretations of information about the location, shape, continuity and grade of the individual orebodies.

The underground Mineral Resource is estimated using block models within the delineated mineralised ore zones. The geological interpretation is based on diamond drill and cross-cut sampling information. A prototype block model of 20m x 5m x 15m representing the minimum mining unit was used and estimates are based on ordinary kriging. The block models are optimised and flagged either as a Mineral Resource or inventory.

Although no open-pit mining has taken place since 2005, three pits still contain a Mineral Resource. The Mineral Resource was estimated using three dimensional computer block models constructed using the Datamine® software. Geological interpretation was based on trench and reverse circulation and or diamond drilling data. A prototype block model of 30m x 30m x 10m was used by the geological model and ordinary kriging as the primary estimation methodology.

Surface stockpiles volumes are based on surveyed figures and grades based on historical sampling. Tailings are part of the Mineral Resource with tonnes and grades based on combinations of 3D block models of some dams and historical metallurgical discharge data.

Ghana

Obuasi cont.

Mineral Resource					
as at 31 December 2008					
Obuasi	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Adansi 50-60	Measured	1.69	5.66	9.59	0.31
	Indicated	1.27	4.68	5.94	0.19
	Inferred	2.82	5.55	15.63	0.50
	Total	5.78	5.39	31.16	1.00
Adansi 60-70	Measured	0.26	5.21	1.34	0.04
	Indicated	0.31	5.31	1.63	0.05
	Inferred	1.68	7.14	11.97	0.39
	Total	2.24	6.67	14.93	0.48
KMS 50-60	Measured	0.87	18.38	15.90	0.51
	Indicated	1.62	18.75	30.29	0.97
	Inferred	3.51	11.77	41.36	1.33
	Total	5.99	14.61	87.56	2.82
KMS 60-70	Measured	0.32	26.67	8.56	0.28
	Indicated	0.43	25.58	10.88	0.35
	Inferred	3.13	18.01	56.34	1.81
	Total	3.87	19.56	75.78	2.44
Total stockpiles	Measured	0.91	1.53	1.40	0.05
	Indicated	–	–	–	–
	Inferred	–	–	–	–
	Total	0.91	1.53	1.40	0.05
Upper Mine	Measured	3.48	10.25	35.65	1.15
	Indicated	1.70	8.83	15.03	0.48
	Inferred	1.63	10.39	16.96	0.55
	Total	6.81	9.93	67.64	2.18
Above 50 Base	Measured	45.52	7.62	347.11	11.16
	Indicated	19.28	7.55	145.65	4.68
	Inferred	24.01	8.41	201.92	6.49
	Total	88.81	7.82	694.69	22.34
Open-Pit - Anyankyirem	Measured	0.56	2.18	1.23	0.04
	Indicated	4.01	2.35	9.40	0.30
	Inferred	1.09	2.25	2.44	0.08
	Total	5.66	2.31	13.07	0.42
Open-Pit - Anyinam	Measured	–	2.11	–	–
	Indicated	0.52	2.86	1.48	0.05
	Inferred	1.42	3.35	4.74	0.15
	Total	1.93	3.22	6.23	0.20
Open-Pit - Gyabunsu-Sibi	Measured	0.01	1.68	0.01	–
	Indicated	0.86	2.29	1.96	0.06
	Inferred	0.74	2.28	1.69	0.05
	Total	1.60	2.28	3.66	0.12
Other surface resources	Measured	–	–	–	–
	Indicated	0.18	2.70	0.49	0.02
	Inferred	–	–	–	–
	Total	0.18	2.70	0.49	0.02
Kokoteasua (Tailings Dam)	Measured	3.44	1.67	5.73	0.18
	Indicated	2.54	1.70	4.32	0.14
	Inferred	–	–	–	–
	Total	5.98	1.68	10.05	0.32
Pompora (Tailings Dam)	Measured	–	–	–	–
	Indicated	30.21	1.60	48.18	1.55
	Inferred	–	–	–	–
	Total	30.21	1.60	48.18	1.55

Mineral Resource (cont.)

as at 31 December 2008					
Obuasi	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Sansu	Measured	–	–	–	–
	Indicated	28.28	1.15	32.52	1.05
	Inferred	30.34	1.18	35.69	1.15
	Total	58.62	1.16	68.22	2.19
Sansu low-grade sulphides	Measured	3.30	4.70	15.49	0.50
	Indicated	2.97	4.46	13.27	0.43
	Inferred	2.02	4.90	9.90	0.32
	Total	8.29	4.66	38.65	1.24
Obuasi	Total	226.90	5.12	1161.71	37.35

Exclusive Mineral Resource

Obuasi	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	29.68	7.06	209.61	6.74
	Indicated	52.29	2.83	147.80	4.75
	Inferred	28.74	6.45	185.32	5.96
Obuasi	Total	110.71	4.90	542.73	17.45

The Obuasi Exclusive Mineral Resource is made up of Mineral Resources from underground, open pit and tailings. The bulk of the Exclusive Mineral Resource (84%) is from underground and of this Mineral Resource, 36% are locked up in Mineral Resource blocks and remnants in historical mined out areas in the north of the mine. This Mineral Resource cannot be accessed due to old infrastructure and currently there are no plans to bring it to Ore Reserve. The remainder of the underground Exclusive Mineral Resource is mineable between Mineral Resource and Ore Reserve cut-offs, below 50 level and in areas where more investigation is required. Some of these Exclusive Mineral Resources will be brought into the Ore Reserves as mining development is put into place to access these areas, and also as the economic criteria change.

Approximately 11% of the Exclusive Mineral Resource is from tailings and will be brought into the Ore Reserves as infrastructure is developed and capacity is increased in the tailings treatment plant. Two of the tailings dams are also active and an Exclusive Mineral Resource margin will be maintained.

Not one of the three open pits in the Mineral Resource is currently included in the Ore Reserve. This represents 4% of the Exclusive Mineral Resource. To bring open pits into the Ore Reserve will require more geotechnical investigation, optimisation and mine design. However, there are currently no plans to engage in large scale open-pit mining at Obuasi.


Mineral Resource below infrastructure

as at 31 December 2008		Metric		Contained gold tonnes	Imperial Contained gold Moz
Obuasi	Category	Tonnes million	Grade g/t		
KMS 50-60 level	Total	5.99	14.61	87.56	2.82
KMS 60-70 level	Total	3.87	19.56	75.78	2.44
Adansi 50-60 level	Total	5.78	5.39	31.16	1.00
Adansi 60-70 level	Total	2.24	6.67	14.93	0.48
Obuasi	Total	17.89	11.71	209.43	6.73


Ghana

Obuasi cont.

Obuasi: Mineral Resource reconciliation
2007 vs 2008

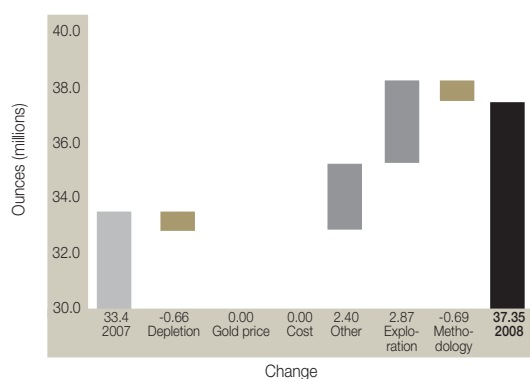

Obuasi: Ore Reserve reconciliation
2007 vs 2008

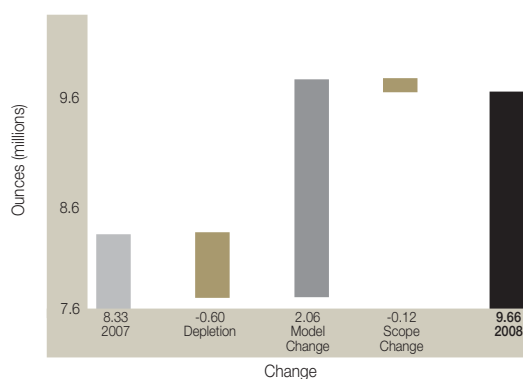

ORE RESERVE ESTIMATION

The three dimensional Mineral Resource models are used as the basis for the Ore Reserves. An ore envelope is developed using the Mineral Resource block model, geological information and the relevant cut-off grade, which is then used for mine design. Datamine® software called Mineral Resource Optimizer is used to generate the ore envelope. An appropriate mining layout is designed that incorporates mining extraction losses, dilution factors and MCF.

Ore Reserve


as at 31 December 2008

Obuasi	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
KMS 50-60	Proved	2.86	14.14	40.39	1.30
	Probable	1.43	14.14	20.17	0.65
	Total	4.28	14.14	60.56	1.95
Total stockpiles	Proved	0.74	1.35	1.00	0.03
	Probable	–	–	–	–
	Total	0.74	1.35	1.00	0.03
Above 50 Base	Proved	19.95	7.64	152.50	4.90
	Probable	9.96	7.74	77.12	2.48
	Total	29.91	7.68	229.62	7.38
Other surface resources	Proved	–	–	–	–
	Probable	0.18	2.66	0.48	0.02
	Total	0.18	2.66	0.48	0.02
Tailings – Kokoteasua	Proved	3.07	1.85	5.68	0.18
	Probable	1.73	1.85	3.20	0.10
	Total	4.80	1.85	8.88	0.29
Obuasi	Total	39.92	7.53	300.53	9.66


Ore Reserves below infrastructure

as at 31 December 2008		Metric			Imperial
Obuasi	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
KMS 50-60 level	Total	4.28	14.14	60.56	1.95

Obuasi – Underground (Metric)

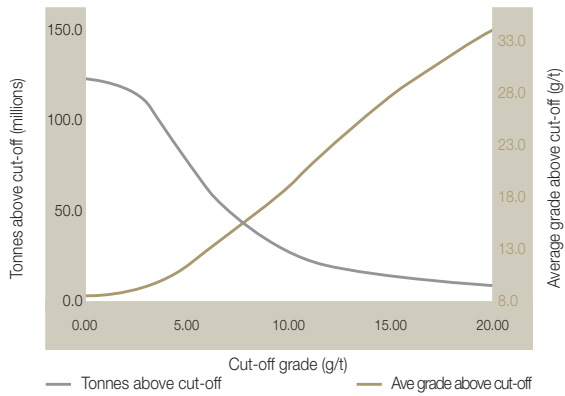

Obuasi – Surface (Metric)

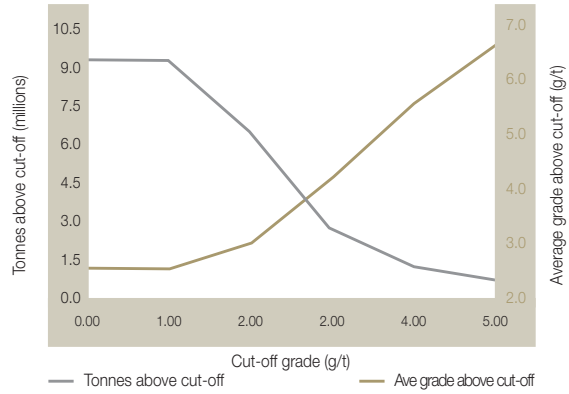


Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	H Eybers	AusIMM	229471	22 years
Ore Reserve	R Downing	AusIMM	229889	22 years

Guinea

Regional overview

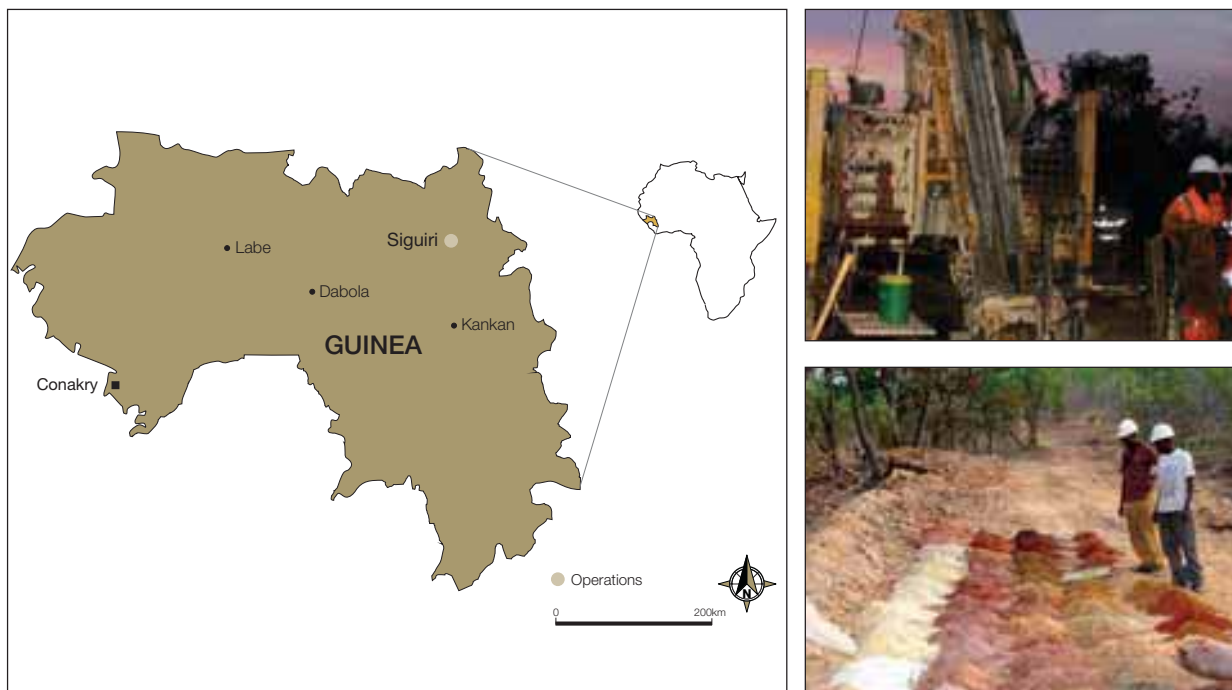

Siguri mine is AngloGold Ashanti's only operation in the Republic of Guinea in West Africa. The mine is 85% owned by AngloGold Ashanti and 15% by the government of Guinea.

MINERAL RESOURCE ESTIMATION

Mineral Resource definition drilling consists of Air Core (AC), Reverse Circulation (RC) and Diamond Drilling (DD) boreholes. All available geological drillhole information is validated for usage in the models and the local geology of the orebody is used to classify the drillhole information into appropriate geostatistical domains. Detailed statistical analyses are conducted on each of these domains and this allows for the identification of high grade outliers. If these values are anomalous to the general population characteristics then they are cut back to the appropriate upper limit of the population.

The Mineral Resources are estimated using three dimensional computer block models constructed in Datamine® software. Geological interpretation is based on Geological borehole data. A prototype block model ranging from 10m x 10m x 2.5m to 50m x 25m x 6m block sizes depending on the shape of the Ore body is used within the Geological model outlines. Ordinary and indicator kriging are used to estimate gold grades and a limiting pit shell at \$1,000/oz is used to quantify the total Mineral Resources.

Mineral Resource and Ore Reserve gold prices

	Units	2008	2007
Gold price – Mineral Resource	US\$/oz	1,000	700
Gold price – Ore Reserve	US\$/oz	720	600

Details of average drillhole spacing and type in relation to the Mineral Resource classification

Mine/ Project	Category	Spacing m (- x -)	Type of drilling				Comments
			Diamond	RC	Blasthole	Other	
Sigiri	Measured	5 x 10	-	✓	-	-	
	Indicated	20 x 40 25 x 25 25 x 50	-	✓	-	-	Both AC and RC, drilled in an offset pattern
	Inferred	20 x 40 25 x 50 50 x 50	-	✓	-	-	AC and RC and some DD holes, drilled in an offset pattern
	Grade control	5 x 12.5	-	✓	-	-	

ORE RESERVE ESTIMATION

The Mineral Resource models for each pit are depleted to the mining surfaces. Costs are assigned on a pit by pit basis reflecting the current existing cost structure of the operation. The relevant dilution and ore loss factors are applied and the optimisation is done in Earthworks® NPV Scheduler software. The relevant metallurgical recoveries, geotechnical parameters, cut-off grades and economics are applied to generate the final Ore Reserve.

Ore Reserve modifying factors

as at 31 December 2008				
Sigiri	Cut-off grade g/t Au	Dilution %	Mine call factor (MCF) %	Metallurgical recovery %
Sigiri				
Spent heap leach	0.35-0.55	-	100	93
Full Grade Ore	0.35-0.55	-	100	96
Marginal Ore	0.35-0.55	-	100	93
Sigiri Oxides				
Bidini	0.35-0.55	-	100	96
Eureka East	0.35-0.55	-	100	96
Kalamagna	0.35-0.55	-	100	96
Kami	0.35-0.55	-	100	96
Kosise	0.35-0.55	-	100	96
Kozan North	0.35-0.55	-	100	96
Kozan South	0.35-0.55	-	100	96
Seguelen	0.37-0.57	-	100	96
Sintroko South	0.4-0.60	-	100	96
Sokunu	0.35-0.55	-	100	96
Soloni	0.35-0.55	-	100	96
Sorofe	0.35-0.55	-	100	96

Guinea

Regional overview *cont.*

Reconciliation of Mineral Resource and Ore Reserve

as at 31 December 2008			Changes in gold contained							
Mine	Percentage attributable	Category	2007	Depletion ⁽¹⁾	Moz		2008	Net change		Comment
					Model change ⁽²⁾	Scope change ⁽³⁾		Diff	%	
Sigiri	100%	Resource	4.95	(0.48)	0.83	0.64	5.94	0.99	20	Increase due to higher resource gold price and increases in the resource at Sintroko and Foulata
		Reserve	2.63	(0.46)	0.04	1.04	3.25	0.62	24	Seguelen NW and Sintroko upgraded from Inferred to Indicated, coupled with mining efficiency increase
Total		Resource	4.95	(0.48)	0.83	0.64	5.94	0.99	20	
		Reserve	2.63	(0.46)	0.04	1.04	3.25	0.62	24	

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.
2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.
3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.



Guinea

Siguiri



SOCIÉTÉ ASHANTI GOLDFIELDS (SAG) DE GUINÉE

Siguiri gold mine is situated in the Siguiri district in the north-east of the Republic of Guinea, West Africa, about 850km from the capital city of Conakry. The SAG concession consists of four blocks totalling 1,494.58km². All ore and waste is mined by a mining contractor in a conventional open-pit mining operation. Processing is done via a Carbon-In-Pulp (CIP) plant.

GEOLOGY

This concession is dominated by Proterozoic Birimian rocks which consist of turbidite facies sedimentary sequences and volcanoclastic sequences. The mineralisation at Siguiri is structurally controlled and occurs either as sheeted veins or within shear zones. There are two main types of oxide mineralisation in the Siguiri basin: eluvial- or alluvial-hosted laterite mineralisation and primary quartz-vein-related or shear hosted mineralisation. The laterite mineralisation occurs as aprons of colluvial or as palaeo-channels of alluvial lateritic gravel adjacent to and immediately above the in situ vein-related or shear zone mineralisation. The vein-related mineralisation is hosted in meta-sediments with the better mineralisation associated with vein stockworks, that occur preferentially in the coarser, brittle siltstones and sandstones. Whereas the shearzone related mineralisation can cross cut both sedimentary and volcanoclastic lithologies. Mineralisation at Siguiri has been deeply weathered to a vertical depth of up to 100m, and the mineralised saprolite provides the primary oxide feedstock for the CIP plant. Fresh hard mineralisation is not processed in the current plant. The practice at Siguiri was to blend the laterite and saprolite ore types and to process these using the heap-leach method. With the percentage of available laterite ore decreasing, however, a CIP plant was brought on stream during 2005 to treat predominantly saprolite oxide ore.

MINERAL RESOURCE: SEGUELEN

The Mineral Resource as published for Seguelen does not reflect the full potential of the orebody. An additional 10 million tonnes grading at 1.2 grams per tonne (380 thousand ounces) have been delineated by a 50m x 50m drill pattern. This mineralisation is currently not accessible due to its proximity to the Kintinian village and hence cannot be considered at this stage to have a reasonable and realistic prospect for eventual economic extraction. Based on mineralised trends there may even be further untested potential beneath the Kintinian village. Negotiations with the local authorities are underway in an effort to secure access.

Guinea

Sigiri cont.

Mineral Resource					
as at 31 December 2008					
Sigiri	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Total stockpiles	Measured	24.18	0.59	14.19	0.46
	Indicated	31.95	0.54	17.29	0.56
	Inferred	13.40	0.57	7.61	0.25
	Total	69.53	0.56	39.09	1.26
Bidini	Measured	0.90	0.75	0.67	0.02
	Indicated	5.20	0.97	5.05	0.16
	Inferred	5.22	1.01	5.27	0.17
	Total	11.33	0.97	11.00	0.35
Eureka East	Measured	–	–	–	–
	Indicated	0.57	0.70	0.40	0.01
	Inferred	0.07	1.76	0.12	–
	Total	0.64	0.82	0.52	0.02
Eureka North	Measured	0.45	0.70	0.31	0.01
	Indicated	0.35	1.18	0.41	0.01
	Inferred	0.41	1.10	0.45	0.01
	Total	1.20	0.97	1.17	0.04
Foulata	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	5.04	1.32	6.65	0.21
	Total	5.04	1.32	6.65	0.21
Kalamagna	Measured	–	–	–	–
	Indicated	7.60	0.69	5.24	0.17
	Inferred	1.10	0.64	0.70	0.02
	Total	8.69	0.68	5.94	0.19
Kami	Measured	7.59	0.76	5.77	0.19
	Indicated	6.45	0.80	5.16	0.17
	Inferred	6.04	0.69	4.17	0.13
	Total	20.08	0.75	15.10	0.49
Kosise	Measured	0.41	0.74	0.31	0.01
	Indicated	9.18	0.81	7.46	0.24
	Inferred	3.21	0.94	3.01	0.10
	Total	12.80	0.84	10.77	0.35
Kozan North	Measured	–	–	–	–
	Indicated	6.50	0.73	4.74	0.15
	Inferred	6.99	0.79	5.52	0.18
	Total	13.49	0.76	10.27	0.33
Kozan South	Measured	–	–	–	–
	Indicated	3.18	0.68	2.16	0.07
	Inferred	1.15	0.63	0.73	0.02
	Total	4.33	0.67	2.89	0.09
Seguelen	Measured	–	–	–	–
	Indicated	17.73	1.09	19.27	0.62
	Inferred	11.59	1.14	13.16	0.42
	Total	29.32	1.11	32.43	1.04
Sintroko South	Measured	–	–	–	–
	Indicated	23.67	1.21	28.55	0.92
	Inferred	2.00	2.38	4.75	0.15
	Total	25.67	1.30	33.30	1.07

Mineral Resource (cont.)

as at 31 December 2008

Site	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Sokunu	Measured	–	–	–	–
	Indicated	3.15	0.76	2.40	0.08
	Inferred	1.16	0.77	0.89	0.03
	Total	4.31	0.76	3.29	0.11
Soloni	Measured	–	–	–	–
	Indicated	6.37	0.76	4.84	0.16
	Inferred	3.82	0.77	2.94	0.10
	Total	10.20	0.76	7.79	0.25
Sorofe	Measured	–	–	–	–
	Indicated	3.31	0.77	2.55	0.08
	Inferred	2.88	0.65	1.87	0.06
	Total	6.19	0.71	4.42	0.14
Sigiri	Total	222.82	0.83	184.63	5.94


Exclusive Mineral Resource

Site	Category	Tonnes million	Grade (g/t)	Contained gold tonnes	Contained gold Moz
Sigiri	Measured	5.57	0.70	3.91	0.13
	Indicated	37.13	0.79	29.51	0.95
	Inferred	64.36	0.91	58.49	1.88
	Total	107.06	0.86	91.91	2.95


The Exclusive Mineral Resource represents the future potential at Sigiri and comes from three areas:

- material that is economic at the Mineral Resource gold price of US\$1,000 per ounce, but not at the Ore Reserve price of US\$720 per ounce (67% of the Exclusive Mineral Resource);
- new deposits currently at the Inferred level of confidence. These areas will be in-fill drilled in the future (22% of the Exclusive Mineral Resource); and
- from Inferred Mineral Resources within the current pit designs (12% of the Exclusive Resource).

Sigiri: Mineral Resource reconciliation 2007 vs 2008

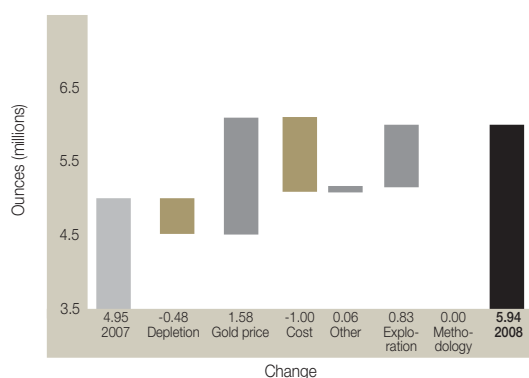

Sigiri: Ore Reserve reconciliation 2007 vs 2008

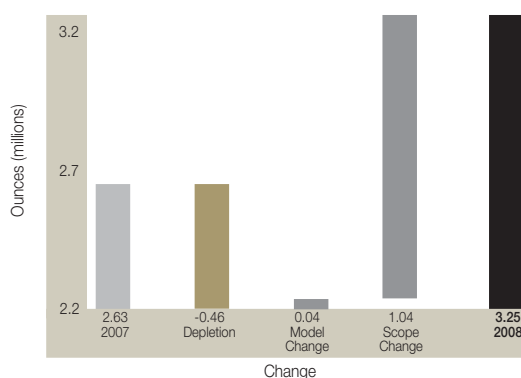

Guinea


Siguiiri cont.

Ore Reserve					
as at 31 December 2008					
Siguiiri	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Total stockpiles	Proved	56.13	0.56	31.48	1.01
	Probable	–	–	–	–
	Total	56.13	0.56	31.48	1.01
Bidini	Proved	–	–	–	–
	Probable	1.15	1.16	1.34	0.04
	Total	1.15	1.16	1.34	0.04
Eureka East	Proved	–	–	–	–
	Probable	0.30	0.81	0.24	0.01
	Total	0.30	0.81	0.24	0.01
Kalamagna	Proved	–	–	–	–
	Probable	4.91	0.76	3.73	0.12
	Total	4.91	0.76	3.73	0.12
Kami	Proved	–	–	–	–
	Probable	10.58	0.86	9.05	0.29
	Total	10.58	0.86	9.05	0.29
Kosise	Proved	–	–	–	–
	Probable	7.08	0.78	5.50	0.18
	Total	7.08	0.78	5.50	0.18
Kozan North	Proved	–	–	–	–
	Probable	4.02	0.84	3.37	0.11
	Total	4.02	0.84	3.37	0.11
Kozan South	Proved	–	–	–	–
	Probable	1.13	0.79	0.89	0.03
	Total	1.13	0.79	0.89	0.03
Seguelen	Proved	–	–	–	–
	Probable	14.12	1.30	18.35	0.59
	Total	14.12	1.30	18.35	0.59
Sintroko South	Proved	–	–	–	–
	Probable	14.09	1.36	19.18	0.62
	Total	14.09	1.36	19.18	0.62
Sokunu	Proved	–	–	–	–
	Probable	3.05	0.78	2.40	0.08
	Total	3.05	0.78	2.40	0.08
Soloni	Proved	–	–	–	–
	Probable	4.84	0.84	4.06	0.13
	Total	4.84	0.84	4.06	0.13
Sorofe	Proved	–	–	–	–
	Probable	1.84	0.84	1.55	0.05
	Total	1.84	0.84	1.55	0.05
Siguiiri	Total	123.24	0.82	101.12	3.25

INFERRED MINERAL RESOURCE IN BUSINESS PLAN

Inferred Mineral Resources were used in the pit optimisation process if their total percentage amounted to less than 15% of the total Ore Reserve. If the Inferred Mineral Resource was greater than 15%, the optimisation was redone excluding the Inferred Mineral Resource. The Inferred Mineral Resource within an optimised shell and subsequent design was used for scheduling. The final schedule included 366,000 ounces of Inferred Mineral Resource in the final designs, which represents 12% of the scheduled ounces.

Siguiri – Surface (Metric)

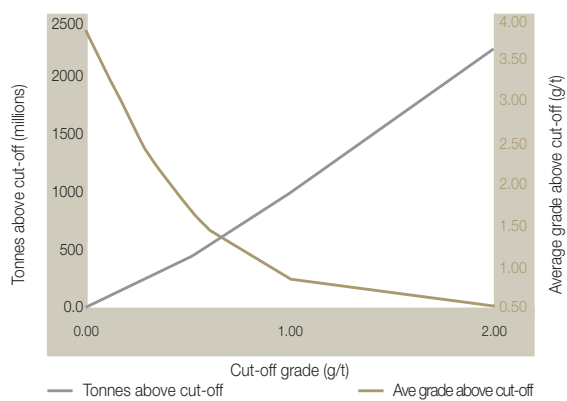


Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	P Winkler	AusIMM	220329	25 years
Ore Reserve	T Mushi	SAIMM	702438	9 years



Mali

Regional overview

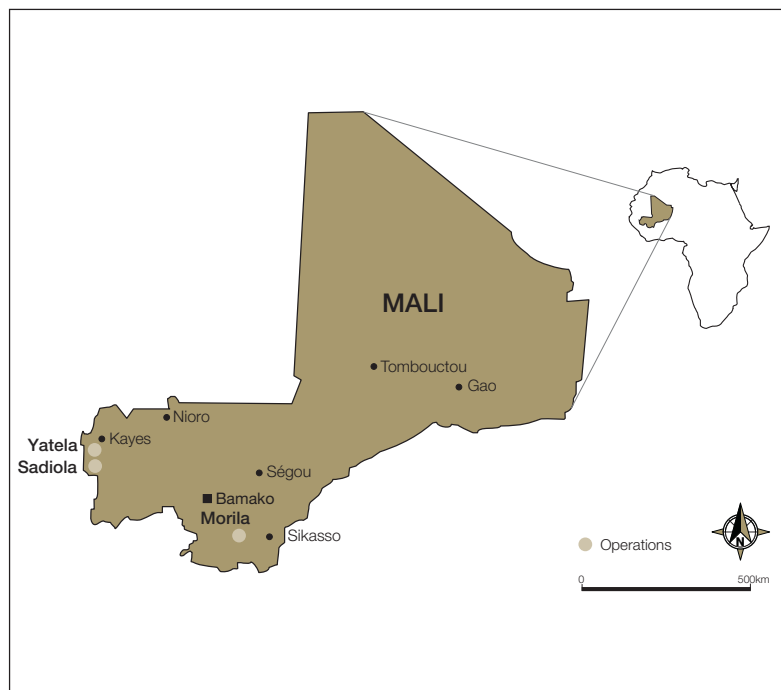

AngloGold Ashanti has interests in three operations in the West African country of Mali – Sadiola (38%), Yatela (40%) and Morila (40%). The Sadiola and Yatela operations are managed by AngloGold Ashanti, while Randgold Resources Limited manages Morila.

Mineral Resource and Ore Reserve gold prices

	Units	2008	2007
Gold price – Mineral Resource	US\$/oz	1,000	700
Gold price – Ore Reserve	US\$/oz	720-870	600

MINERAL RESOURCE ESTIMATION

The Mineral Resource is taken as the material that falls within the \$1,000/oz economic shell optimised for each individual deposit. A three dimensional surface is generated to create the outline of the geological model. This model is then used as a prototype model to estimate grades. Block sizes between 25m x 25m x 10m and 30m x 30m x 10m (X Y Z) and where appropriate selective sub-celling are used for definition on the geological and mineralisation boundaries. The dimensions of these sub cells are 12.5m x 12.5m x 3.33m and 10m x 10m x 5.0m. All the deposits have kriged block models and where appropriate a geostatistical technique called Uniform Conditioning is used to estimate the proportion of economic ore that occur above the Mineral Resource cut-off and this is reported according to the dimensions of the practical mining unit.

Details of average drillhole spacing and type in relation to Mineral Resource classification

Mine/Project	Category	Spacing m (- x -)	Type of Drilling			Comments
			Diamond	RC	Other	
Morila	Measured	10 x 10	✓	✓		Blastholes were only used for sampling when there was insufficient RC coverage.
	Indicated	30 x 30	✓	✓		
	Inferred	50 x 50	✓	✓		
	Grade control	10 x 10, 50 x 50		✓	✓	
Sadiola	Measured	20 x 20 and 25 x 25	✓	✓	✓	
	Indicated	25 x 50	✓	✓	✓	
	Inferred	>25 x 50		✓	✓	
	Grade control	5 x 10		✓	✓	
Yatela	Measured	10 x 10 and 25 x 25		✓	✓	
	Indicated	25 x 25 and 35 x 45		✓	✓	
	Inferred	>25 x 25 and > 35 x 45	✓			
	Grade control	5 x 10		✓	✓	

ORE RESERVE ESTIMATION

The Mineral Resource models are used as the basis for the Ore Reserves. Pit optimisation is done using Whittle® software. The typical Whittle approach for a mill-constrained operation is followed. Optimisations are run on Measured and Indicated Mineral Resources and Measured, Indicated and Inferred Mineral Resources. All appropriate costs, metallurgical recovery factors and geotechnical parameters are applied to generate the final Ore Reserves.

Ore Reserve modifying factors

as at 31 December 2008						
Mine	Gold price used USD\$/oz	Cut-off grade g/t Au	Dilution %	Mine call factor (MCF)	Metallurgical Recovery factor %	Comments
Morila						
Main Pit	720	1.0	10	100	89-91.5	5% ore loss
Stockpile FGO	720	1.4	–	100	89-91.5	No factors applied
Stockpile Marginal	720	1.0	–	100	89	

Mali

Regional overview *cont.*

Ore Reserve modifying factors (*cont.*)

as at 31 December 2008						
Mine	Gold price used US\$/oz	Cut-off grade g/t Au	Dilution %	Mine call factor (MCF)	Metallurgical Recovery factor %	Comments
Sadiola						
FE3	870	1.09	–	100	78-93	123 tonnes and 109 metal Factor; COG is for FGO only
FE4	870	1.12	–	100	78-93	130 tonnes and 120 metal Factor; COG is for FGO only
Main Pit – Oxide	870	1.26	–	100	78-93	100 tonnes and 100 metal Factor; COG is is for FGO only
Total stockpiles	870	1.20	–	100	78-93	No factors are applied on stockpile
Yatela						
Alamoutala Pit	–	–	–	–	–	
Main Pit	870	0.54	–	100	75-85	96% - MRF on metal
Total stockpiles	870	0.54	–	100	75-85	100% - MRF on metal

Reconciliation of Mineral Resource and Ore Reserve

as at 31 December 2008			Changes in gold contained Moz							
Mine	Percentage attributable	Category	2007	Deple- tion ⁽¹⁾	Model change ⁽²⁾	Scope change ⁽³⁾	2008	Net change Diff	%	Comment
Morila	40%	Resource	0.68	(0.22)	0.01	–	0.46	(0.22)	(32)	
		Reserve	0.63	(0.19)	0.02	–	0.46	(0.17)	(27)	Depletion
Sadiola	38%	Resource	1.93	(0.42)	0.47	1.15	3.13	1.20	62	Higher Mineral Resource gold price resulted in increased Mineral Resources, specifically from the deep sulphides
		Reserve	0.39	(0.20)	–	0.23	0.42	0.03	6	Positive RRF for FE3 and FE4, removal of MCF for sulphides, and positive effect of economics on FE3 and FE4 reserves
Yatela	40%	Resource	0.34	(0.08)	0.03	0.07	0.35	0.01	3	
		Reserve	0.20	(0.08)	0.02	0.02	0.16	(0.04)	(18)	Depletion
Total		Resource	2.95	(0.72)	0.50	1.22	3.95	0.10	34	
		Reserve	1.22	(0.47)	0.04	0.25	1.04	(0.18)	(15)	

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.

2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.

3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.

Mali

Morila



OVERVIEW

The Morila mine is situated some 280km by road south-east of Bamako, the capital city of Mali. The mine is operated by Morila SA, a joint venture company incorporating Randgold Resources Ltd (40%), AngloGold Ashanti Ltd (40%), and the Government of Mali (20%). Randgold Resources took over the operation of Morila mine from AngloGold Ashanti Ltd in February 2008.

MINING

Mining at Morila is from a single open-pit operation employing conventional truck and shovel methods. The mining method used is standard open-cut mining, involving a fleet of 10 drill rigs to drill and blast the ore and waste rock, prior to loading by four hydraulic shovels/excavators into a fleet of 18 Caterpillar 777 dump trucks. In 2007, the mine began dumping waste into the previously mined pushbacks. The pit mining operations will end in April 2009 after which the mine will treat low-grade stockpiles.

GEOLOGY

The Morila orebody is located predominantly in metasediments within a broad NNW-trending corridor of shearing. This shear zone has both near vertical and flat lying components. It is interpreted as being a second order shear off the main Banafin shear, approximately 25km to the east. The Doubalakoro granite pluton bounds the sediments to the west and the Massigui granite to the east. The deposit occurs within a sequence of metamorphosed Birimian meta-sediments (amphibolite facies). Gold mineralisation is associated with silica feldspar alteration and the sulphide minerals arsenopyrite, pyrrhotite, and pyrite (with minor chalcopyrite).

PROCESSING

Ore is processed at a rate of 4.2Mtpa via a conventional carbon-in-leach (CIL) plant after passing through primary and secondary crushing processes followed by further comminution via a semi-autogenous grinding (SAG)

Mali

Morila cont.


mill and ball mill. After crushing and milling, the slurried ore passes through the cyanide leach circuit for gold extraction after which the leached ore is pumped and deposited into the tailings storage facility (TSF). Supernatant water from the TSF is reclaimed and collected in the return water dam before being returned to the mill for re-use.

Mineral Resource						
as at 31 December 2008						
Morila	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz	
Main Pit	Measured	0.82	2.69	2.19	0.07	
	Indicated	–	–	–	–	
	Inferred	–	–	–	–	
	Total	0.82	2.69	2.19	0.07	
Total stockpiles	Measured	7.44	1.65	12.25	0.39	
	Indicated	–	–	–	–	
	Inferred	–	–	–	–	
	Total	7.44	1.65	12.25	0.39	
Morila	Total	8.25	1.75	14.44	0.46	


Exclusive Mineral Resource						
Morila	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz	
Morila	Measured	–	–	–	–	
	Indicated	–	–	–	–	
	Inferred	–	–	–	–	
Morila	Total	–	–	–	–	

The entire Mineral Resource is contained in the LOM pit design.

Morila: Mineral Resource reconciliation 2007 vs 2008

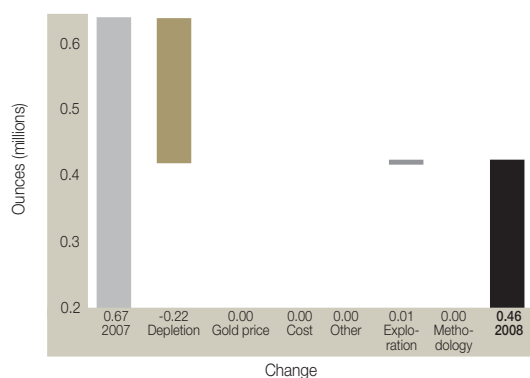

Morila: Ore Reserve reconciliation 2007 vs 2008

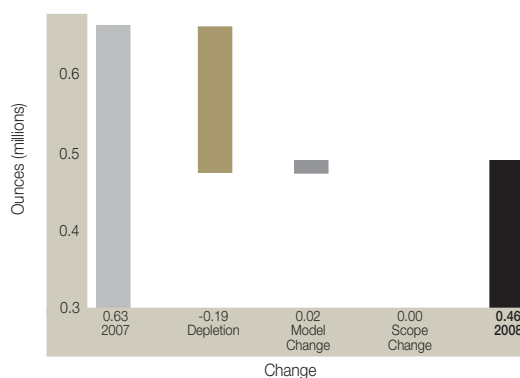


Ore Reserve

as at 31 December 2008

Morila	Category	Tonnes million	Grade g/t	Contained gold tonne	Contained gold Moz
Main Pit	Proved	0.67	2.74	1.82	0.06
	Probable	0.14	1.09	0.16	0.01
	Total	0.81	2.45	1.98	0.06
Total stockpiles	Proved	4.83	1.92	9.28	0.30
	Probable	2.61	1.14	2.97	0.10
	Total	7.44	1.65	12.25	0.39
Morila	Total	8.25	1.72	14.23	0.46

Morila – Surface (Metric)

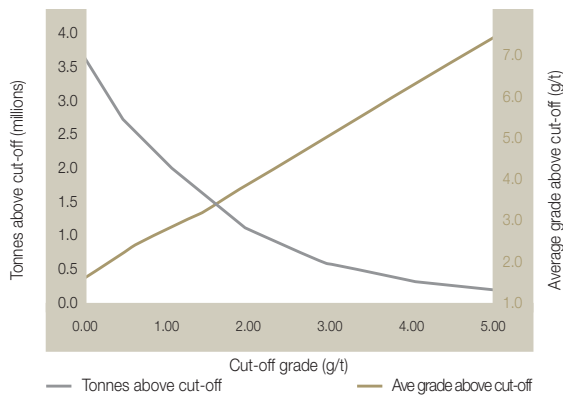

Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	A Kone	AusIMM	222568	16 years
Ore Reserve	S Ndede	AusIMM	201772	19 years

Mali

Sadiola



Sadiola is situated in the north-west of Mali, 77km to the south of the regional capital of Kayes. The mining operations take place in five open pits, the Sadiola Main Pit and four satellite pits, namely FE3 Pits 1 to 3 and pit FE4. Ore is treated in a 4.8Mt/year CIP processing plant. The plant was originally designed to treat soft oxide ore, but has been progressively adapted to receive soft sulphide ores and even some types of hard oxide ores. The down dip extension of the mineralisation mined in the Sadiola Main Pit has been named the Deep Sulphides Project (DSP), in which the gold ore occurs in the underlying fresh rock. A full feasibility study of the DSP is scheduled for completion in 2009. The project may substantially extend the life of Sadiola's operations and leverage exploration efforts and further discoveries of hard-rock gold deposits in the district.

GEOLOGY

The Sadiola deposits are located within the Malian portion of the Keniéba-Kedougou window, a major early Proterozoic-Birimian outlier along the north-east margin of the Kenema-Man shield. The deposits are confined to the north portion of the window.

The Sadiola Hill deposit is underlain by the north-trending Sadiola Fracture Zone (SFZ), over a drilled strike length of approximately 2,500m, running along the contact of marbles and greywackes and intruded by bodies of diorite and quartz-feldspar porphyries. North-east trending structures, often intruded by quartz-feldspar porphyries, extending to the east of the SFZ, also carry gold and have been adding ounces to the overall production from the Sadiola Main Pit. The mineralised zones have been intensely weathered to a maximum depth of 200m.

The Sadiola Hill deposit originally consisted of two zones, an upper oxidised cap and an underlying sulphide zone. From 1996 until 2002, shallow saprolite oxide ore was the primary ore source. Since 2002, the deeper saprolitic sulphide ore has been mined, progressively replacing the depleted oxide Ore Reserve.

The satellite pits are located to south-east of the Sadiola Hill mine and are underlain by a different type of ore. The mineralised zones straddle the contact between marbles to the west and carbon-rich pelites to the east, following a NNW-trend in the FE3 Pits 1 and 2, NNE at Pit 3, and a NE-strike in FE4 pit, due to regional folding. Gold mineralisation is mostly associated with lens-shaped breccia zones running broadly parallel to the enclosing metasediments and folded accordingly.

At this stage all the gold is recovered from mostly soft, oxidised ore. Some gold-rich, hard oxide nodes have been also treated in the Sadiola plant, after first stage crushing. The sulphide potential underneath the current satellite pits is targeted for investigation in 2009.

Mineral Resource					
as at 31 December 2008					
Sadiola	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
FE2	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	0.77	1.36	1.05	0.03
	Total	0.77	1.36	1.05	0.03
FE3	Measured	–	–	–	–
	Indicated	1.66	1.91	3.18	0.10
	Inferred	–	–	–	–
	Total	1.66	1.91	3.18	0.10
FE3S	Measured	–	–	–	–
	Indicated	1.72	2.15	3.69	0.12
	Inferred	0.17	2.88	0.48	0.02
	Total	1.88	2.21	4.17	0.13
FE4	Measured	–	–	–	–
	Indicated	1.24	2.24	2.77	0.09
	Inferred	0.45	1.75	0.78	0.03
	Total	1.68	2.11	3.55	0.11
FN2	Measured	–	–	–	–
	Indicated	0.21	1.51	0.32	0.01
	Inferred	0.26	4.01	1.03	0.03
	Total	0.47	2.89	1.35	0.04
FN3	Measured	–	–	–	–
	Indicated	0.04	1.71	0.07	–
	Inferred	0.60	1.30	0.77	0.03
	Total	0.64	1.32	0.84	0.03
Main Pit	Measured	–	–	–	–
	Indicated	4.99	1.90	9.46	0.30
	Inferred	0.49	1.52	0.75	0.02
	Total	5.48	1.86	10.21	0.33
Sekokoto	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	0.55	1.50	0.82	0.03
	Total	0.55	1.50	0.82	0.03
Tambali South	Measured	–	–	–	–
	Indicated	2.15	1.30	2.79	0.09
	Inferred	1.57	1.57	2.46	0.08
	Total	3.72	1.41	5.25	0.17
Total stockpiles	Measured	9.37	1.56	14.59	0.47
	Indicated	–	–	–	–
	Inferred	–	–	–	–
	Total	9.37	1.56	14.59	0.47
Deep Sulphides	Measured	–	–	–	–
	Indicated	12.80	2.83	36.15	1.16
	Inferred	5.96	2.74	16.30	0.52
	Total	18.75	2.80	52.45	1.69
Sadiola	Total	44.98	2.17	97.46	3.13

Mali

Sadiola cont.

Exclusive Mineral Resource					
Sadiola	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	4.12	0.75	3.11	0.10
	Indicated	20.72	2.36	48.90	1.57
	Inferred	10.80	2.26	24.45	0.79
Sadiola	Total	35.65	2.14	76.45	2.46


The Exclusive Mineral Resources for the Sadiola pits are those Mineral Resources that are outside the current Ore Reserve designs but inside the Mineral Resource shells. Any Inferred Mineral Resources within the design shells are also reported in the Exclusive Mineral Resources. Unless the gold price increases and the costs are favourable, only the Inferred Mineral Resource portion of the Mineral Resource within the LOM shell will be converted to Ore Reserves through grade control drilling.

FE3 Pit 1 has no Inferred Mineral Resource in the published Mineral Resource and therefore the only possibility for converting the Exclusive Mineral Resource to the Proved Ore Reserve is through favourable gold price and cost changes. The FE3S Pit has 5% of Inferred Mineral Resource within the design shell and FE4 has 22%.


The FE3S Inferred Mineral Resources can be upgraded into Ore Reserve by normal grade control drilling. For FE4 infill drilling has been completed and the FE4 Mineral Resource model will be revised in the first quarter of 2009. This should lead to an increase in Ore Reserve. For the Main Pit, only 4% of the Exclusive Mineral Resource is within the design pit.


These will be converted to Ore Reserve in 2009 through grade control drilling. The rest of the Main Pit Exclusive Mineral Resource can only be converted to Ore Reserve if the Deep Sulphides Project is successful.

Sadiola: Mineral Resource reconciliation 2007 vs 2008

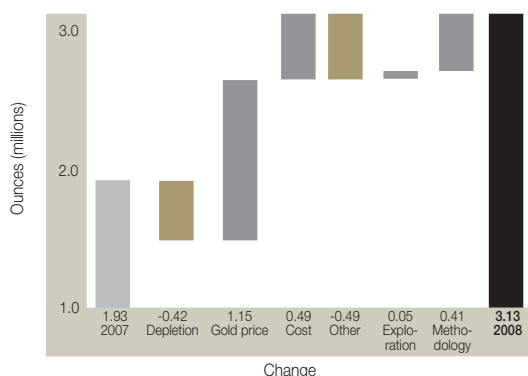

Sadiola: Ore Reserve reconciliation 2007 vs 2008

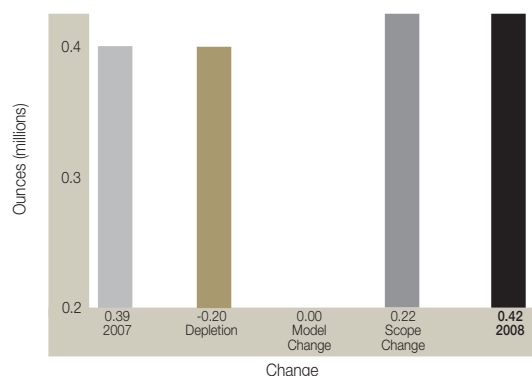

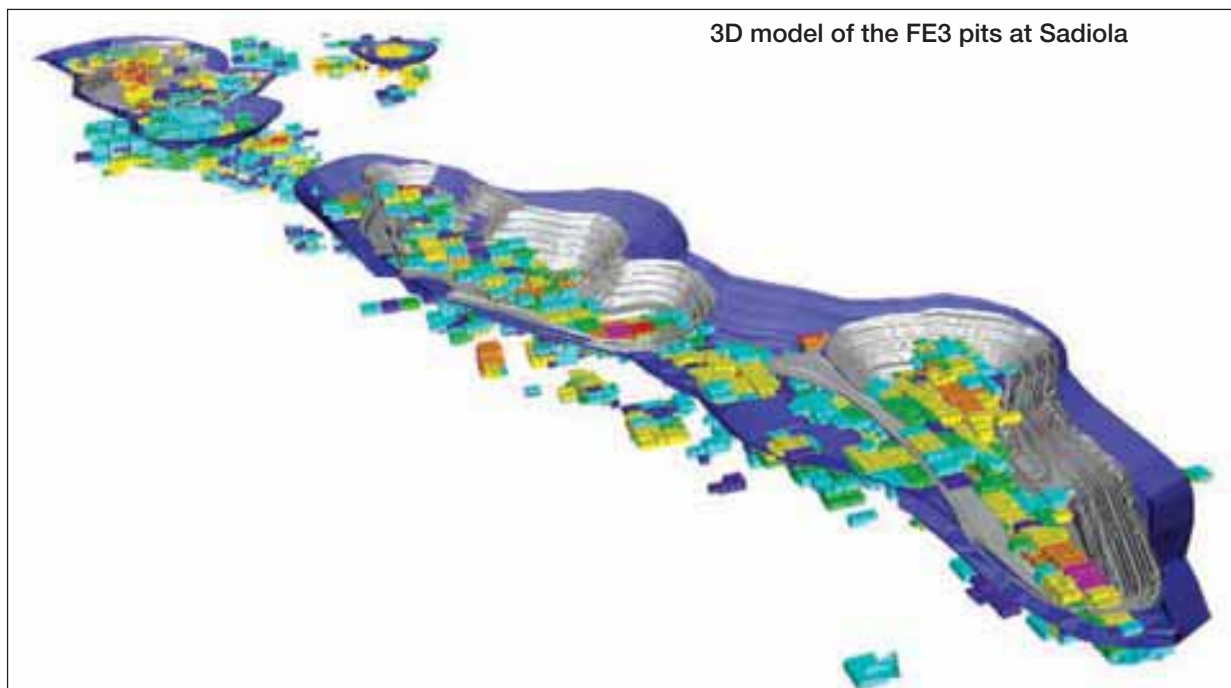

Ore Reserve


as at 31 December 2008

Sadiola	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
FE3	Proved	–	–	–	–
	Probable	1.64	2.47	4.05	0.13
	Total	1.64	2.47	4.05	0.13
FE4	Proved	–	–	–	–
	Probable	1.04	2.53	2.63	0.09
	Total	1.04	2.53	2.63	0.09
Main Pit	Proved	–	2.31	0.01	–
	Probable	0.43	3.14	1.36	0.04
	Total	0.44	3.13	1.37	0.04
Total stockpiles	Proved	2.42	2.06	4.99	0.16
	Probable	–	–	–	–
	Total	2.42	2.06	4.99	0.16
Sadiola	Total	5.54	2.35	13.04	0.42

INFERRED MINERAL RESOURCE IN PIT OPTIMISATION

The Inferred Mineral Resource was used in the pit optimisation process and 0.11 million ounces are present in the optimised pit, of which 0.06 million ounces are included in the final production schedule.

Sadiola – Surface (Metric)

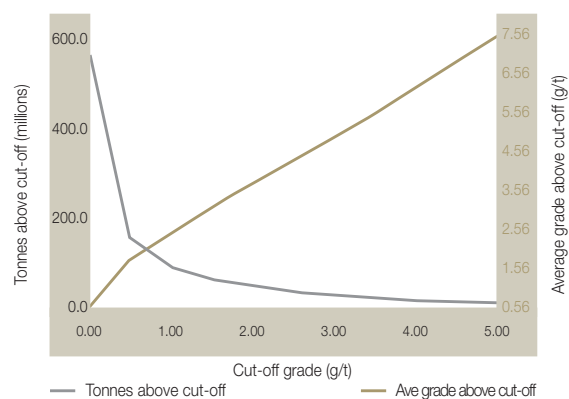

Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	A Ngilazi	AusIMM	229909	16 years
Ore Reserve	K Bartsch	AusIMM	107390	20 years



Mali

Yatela



The Yatela Mine is situated some 25km north of Sadiola and approximately 50km south-west of Kayes. The Yatela operation is currently mining from two open pits, the Yatela Main Pit and the satellite Alamoutala pits. The Yatela Main Pit is currently mining Pushback 7, toward the western end of the pit. The mine is approaching the end of its life.

Ore is processed through a 3.0Mtpa heap leach plant, commissioned in 1998. The pregnant liquor pond for gold recovery uses the carbon in solution process. Loaded carbon is sent to the Sadiola Mine for elution, regeneration, electro-winning and smelting.

GEOLOGY

The Yatela deposit is located within the Malian portion of the Keniéba-Kedougou window, a major Early Proterozoic-Birimian outlier along the north-east margin of the Kenema-Man shield.


The Yatela deposit is located in the north of the window and is hosted by sediments of the Kofi Formation, which have been intruded by numerous felsic intrusives. The sediments consist of fine-grained greywacke and pelites, which are locally carbon-rich, and impure limestones with minor tuffs and acid volcanics.

The primary gold mineralisation at Yatela is associated with a sheared contact between predominantly dolomitic rocks of the Kofi Formation to the west and a large, weakly mineralised, dioritic intrusion to the east. This primary mineralisation was concentrated to economic grades through dissolution of carbonate-rich rocks by supergene processes. Karsting of carbonate rocks has resulted in the development of deep, coalescent pot holes, collectively named the Yatela Basin, which were gradually filled by sandstones and conglomerates during peneplanation of the Proterozoic rocks. The chaotic collapse during karsting, coupled with the infill sediments resulted in the orebody being hosted in a melange-type of rocks made up of sedimentary rocks and dissolution residues. Gold is disseminated in the unconsolidated ferruginous, sandy-clayed layer that lines the bottom and walls of a deep trough with steep margins. The ore zone dips steeply on the west wall and more gently to the west on the east wall, following a keel-like geometry with tight closure towards the south. The supergenie enrichment of low-grade primary gold mineralisation, associated with the karst forming process, is the most important geological feature to the economics of the Yatela deposit.

Mali

Yatela cont.

In the Alamoutala pits, the gold mineralisation is mined from the saprolitised marbles and karstic rocks in the south, and from weathered Birimian rocks to the north. The Alamoutala area is underlain by north-trending Birimian clastic metasediments and calcitic marbles, which are intruded by a coarse grained granodiorite body. Gold mineralisation is found along an intermittently sheared and fractured contact, named the Alamoutala Fracture Zone, between the metaclastics and the carbonate units. These rocks have locally been strongly biotite- and feldspar-altered. High-grade gold mineralisation is also hosted in magnetite-bearing, skarn-like calc-silicate rocks along the contact with the granodiorite intrusive.

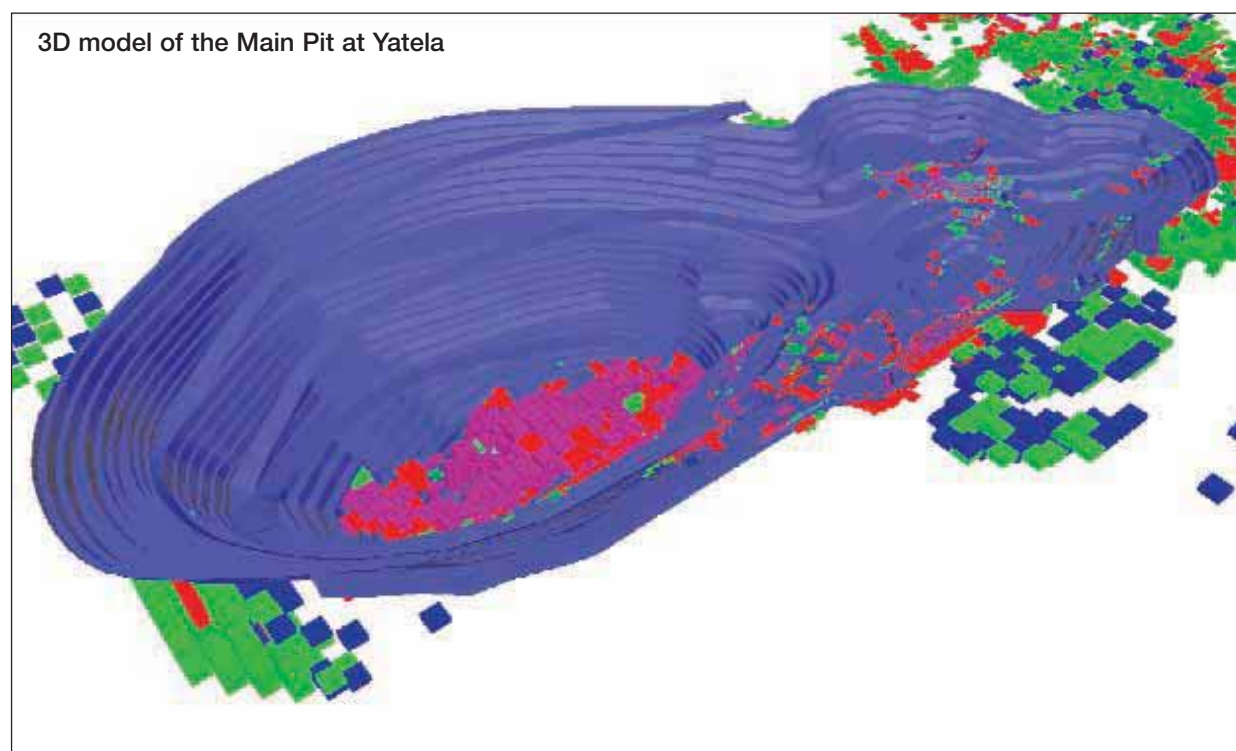

Mineral Resource

as at 31 December 2008

Yatela	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Alamoutala Pit	Measured	0.04	1.03	0.04	–
	Indicated	–	1.65	–	–
	Inferred	–	1.00	–	–
	Total	0.04	1.05	0.05	–
Main Pit	Measured	0.43	4.41	1.89	0.06
	Indicated	1.58	4.35	6.89	0.22
	Inferred	0.30	3.51	1.05	0.03
	Total	2.31	4.25	9.83	0.32
Total stockpile	Measured	1.30	0.70	0.91	0.03
	Indicated	–	–	–	–
	Inferred	–	–	–	–
	Total	1.30	0.70	0.91	0.03
Yatela	Total	3.65	2.95	10.78	0.35


Exclusive Mineral Resource

Yatela	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	0.22	1.80	0.39	0.01
	Indicated	0.70	2.63	1.85	0.06
	Inferred	0.30	3.51	1.05	0.03
Yatela	Total	1.22	2.70	3.29	0.11


The Exclusive Mineral Resources for Yatela are those Mineral Resources that fall outside the current life of mine (LOM) but inside the Mineral Resource shells for the Yatela Main and Alamoutala pits. Any Inferred Mineral Resources within the LOM shell are also considered Exclusive. Currently only Inferred Mineral Resources within the LOM shell at the Yatela Main Pit are convertible to Ore Reserves and this will be done through grade control drilling. In addition the Yatela Main Pit will also be optimised in order to ensure that all recoverable material is mined before the envisaged closure.

The Alamoutala Mineral Resources have been depleted to LOM design and are therefore exhausted. However, whilst the satellite pits were mined and exhausted in 2008, the Alamoutala Main Pit stopped mining in 2005. There is therefore a possibility of reviving the Alamoutala Main Pit under the prevailing gold price and cost regime. Some drilling has been carried out to the south and some further drillholes are planned across the existing pit to accurately determine the hard/soft boundary to see whether it is possible to mine the pit deeper.

Yatela: Mineral Resource reconciliation 2007 vs 2008

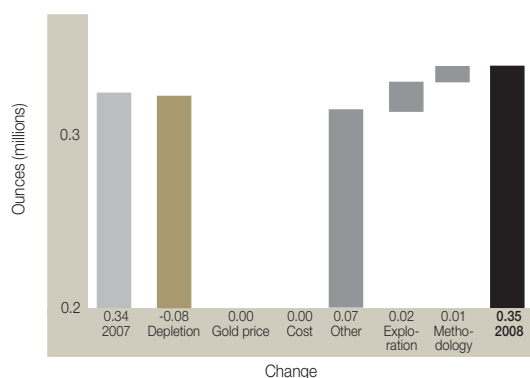

Yatela: Ore Reserve reconciliation 2007 vs 2008

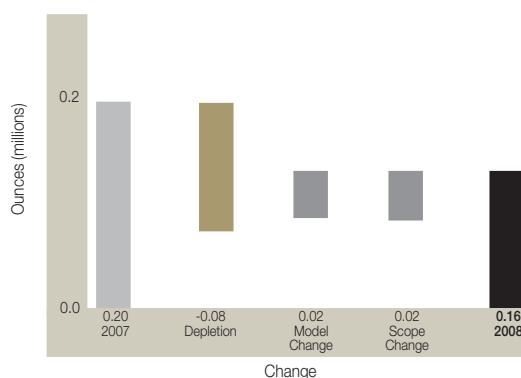

Ore Reserve


as at 31 December 2008

Yatela	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Main Pit	Proved	0.07	4.86	0.32	0.01
	Probable	0.79	4.86	3.86	0.12
	Total	0.86	4.86	4.18	0.13
Total stockpile	Proved	1.30	0.70	0.91	0.03
	Probable	–	–	–	–
	Total	1.30	0.70	0.91	0.03
Yatela	Total	2.16	2.36	5.09	0.16

Mali

Yatela cont.

Yatela – Surface (Metric)

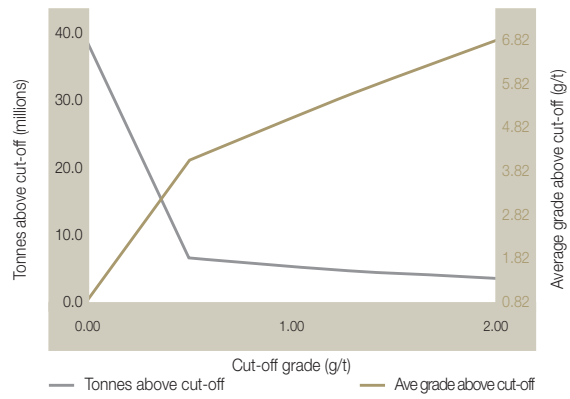


Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	A Ngilazi	AusIMM	229909	16 years
Ore Reserve	K Bartsch	AusIMM	107390	20 years



Namibia

Regional overview

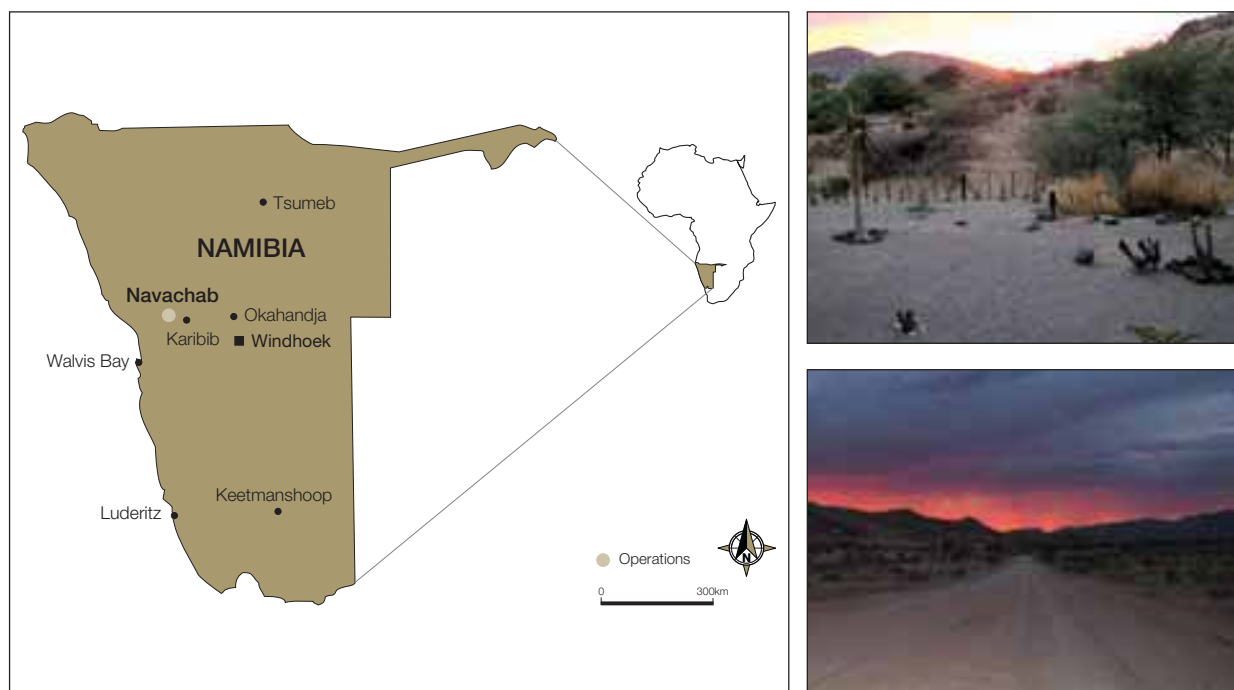

Navachab Gold Mine, AngloGold Ashanti's sole operation in Namibia, is wholly owned by the Company.

MINERAL RESOURCE ESTIMATION

Mineral Resource estimation is performed using Datamine® software. Block dimensions of 25m x 25m x 5m (X Y Z) are used as the prototype model. Grade interpolation is done into these blocks using Ordinary and Indicator Kriging methods. A geostatistical technique called Uniform Conditioning is then used to estimate the proportion of economic ore that occur above the Mineral Resource cut-off and this is reported according to the selective mining unit (SMU).

Mineral Resource and Ore Reserve gold prices and exchange rate

	Units	2008	2007
Gold price – Mineral Resource	US\$/oz	1,000	700
Gold price – Ore Reserve	US\$/oz	720	600
Exchange rate – South Africa	ZAR/US\$	8.07	7.70

Details of average drillhole spacing and type in relation to Mineral Resource classification

	Category	Spacing m (- x -)	Type of drilling				Comments
			Diamond	RC	Blasthole	Other	
Navachab	Measured	10 x 10	-	✓	-	-	
	Indicated	25 x 25	✓	✓	-	-	
	Inferred	50 x 50	✓	✓	-	-	
	Grade control	5 x 10 and 10 x 10	-	✓	-	-	

Namibia

Regional overview cont.

ORE RESERVE ESTIMATION

MineSight® optimisation software is used to generate optimised pit shells using economic parameters. The final pits are then designed based on the optimised pit shell, recommended slope geometry and ramp access requirements.

Ore Reserve modifying factors					
as at 31 December 2008					
Navachab	Cut-off grade g/t Au	Mine call factor (MCF)	Metallurgical recovery factor %	Comments	
Gecko	0.5	100	72-94	94% Grade adjustment factor applied – a combination of RRF and MRF	
Grid A	0.5	100	72-94	94% Grade adjustment factor applied – a combination of RRF and MRF	
Main Pit	0.5	100	72-94	94% Grade adjustment factor applied – a combination of RRF and MRF	
Stockpile - full grade ore	0.5	100	72-94	94% Grade adjustment factor applied – a combination of RRF and MRF	

Reconciliation of Mineral Resource and Ore Reserve										
as at 31 December 2008										
Mine	Percentage attributable	Category	Changes in gold contained Moz					Net change		Comment
			2007	Depletion ⁽¹⁾	Model change ⁽²⁾	Scope change ⁽³⁾	2008	Diff	%	
Navachab	100%	Resource	4.42	(0.19)	(0.15)	0.25	4.33	(0.10)	(2)	
		Reserve	1.47	(0.08)	0.01	(0.06)	1.34	(0.13)	(9)	Depletion and application of a 6% grade adjustment
Total		Resource	4.42	(0.19)	(0.15)	0.25	4.33	(0.10)	(2)	
		Reserve	1.47	(0.08)	0.01	(0.06)	1.34	(0.13)	(9)	

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.
2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.
3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.

Namibia

Navachab




Navachab gold mine is located 10km south-west of Karibib and 170km north-west of Windhoek, the capital of Namibia. Navachab mine is an open-pit mine. Its processing plant, with a production capacity of 120,000 tonnes per month, includes mills, CIP and electro-winning facilities.

GEOLOGY

The Navachab gold deposit is located in the Pan-African Damara Orogen and is hosted by greenschist-amphibolite facies calc-silicates, marbles and volcano-clastic rocks. The rocks have been intruded by granite, pegmatite and aplitic dykes and have also been deformed into a series of alternating dome and basin-like structures. The mineralised zone forms a sheet-like body which plunges at an angle of approximately 20° to the north-west. The mineralisation is predominantly hosted in a sheeted vein set ($\pm 60\%$) and a replacement skarn body ($\pm 40\%$). The mineralisation in the main pit is hosted by a NE-SW striking metamorphosed sequence of greenschist-amphibolite facies, calc-silicates, marbles and volcano-clastic rocks that dip at 70° to the west. The gold is very fine-grained and associated with pyrrhotite and minor amounts of pyrite, chalcocopyrite, arsenopyrite, sphalerite, malonite and bismuthinite. An estimated 90% of the gold occurs as free gold and the remainder is present in minerals such as malonite (Au_2Bi). Approximately 80% of the gold is free milling. Silver is also present and the gold to silver ratio is approximately 15 to 1.

Namibia

Navachab cont.

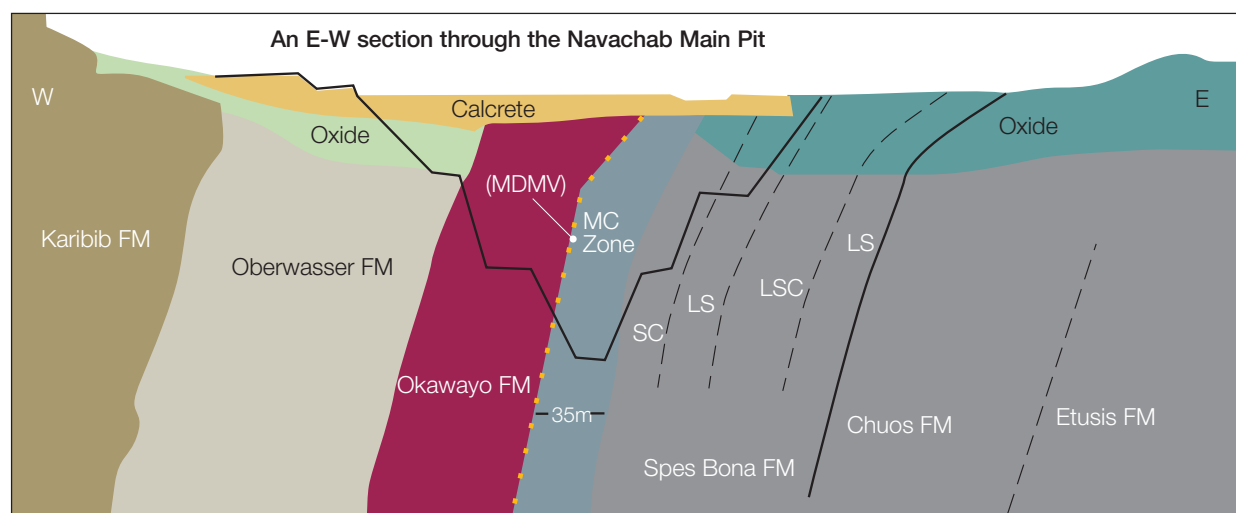

Mineral Resource

as at 31 December 2008

Navachab	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Anomaly 16	Measured	–	–	–	–
	Indicated	1.28	1.28	1.64	0.05
	Inferred	5.91	0.80	4.72	0.15
	Total	7.19	0.89	6.37	0.21
Gecko	Measured	–	–	–	–
	Indicated	0.33	1.43	0.47	0.02
	Inferred	0.88	1.21	1.07	0.03
	Total	1.21	1.27	1.54	0.05
Grid A	Measured	0.40	1.99	0.79	0.03
	Indicated	0.31	1.62	0.50	0.02
	Inferred	0.10	1.17	0.11	–
	Total	0.81	1.75	1.41	0.05
Main Pit	Measured	1.56	1.35	2.10	0.07
	Indicated	60.02	1.26	75.43	2.43
	Inferred	35.42	1.14	40.34	1.30
	Total	97.00	1.22	117.88	3.79
Total stockpiles	Measured	11.88	0.62	7.36	0.24
	Indicated	–	–	–	–
	Inferred	–	–	–	–
	Total	11.88	0.62	7.36	0.24
Navachab	Total	118.08	1.14	134.55	4.33


Exclusive Mineral Resource

Navachab	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	6.63	0.56	3.71	0.12
	Indicated	34.36	1.18	40.61	1.31
	Inferred	42.31	1.09	46.25	1.49
Navachab	Total	83.30	1.09	90.58	2.91


The largest portion (2.55Moz) of the Exclusive Mineral Resource is to be found in the Main Pit. A pre-feasibility study on the expansion of operations at Navachab is in progress and may bring approximately 1.02Moz into Ore Reserve. A five year drilling program has been developed to increase confidence and to follow the extent of the mineralisation at Navachab. Approximately 0.11Moz is tied up in the marginal ore stockpiles at a grade of 0.53g/t and the intention is to test this for economic viability through the DMS project (dense medium separation) during 2009. If the gold recoveries through the DMS process prove to be as designed then the marginal ore stockpiles will be included in the Ore Reserve by 2011.

Further minor amounts of Exclusive Mineral Resources are at the satellite ore bodies, such as Anomaly 16 (0.21Moz), Gecko (0.04Moz) and Grid A (0.01Moz). Drilling to improve the confidence in the ounces at Gecko has commenced and it is expected that all the Exclusive Mineral Resource ounces at Gecko will be included in the Ore Reserve by the end of 2009.

Navachab: Mineral Resource reconciliation 2007 vs 2008

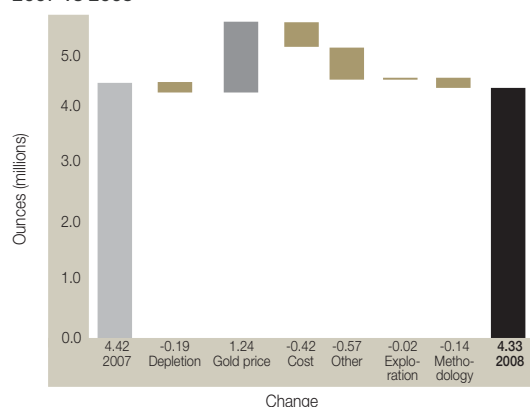

Navachab: Ore Reserve reconciliation 2007 vs 2008

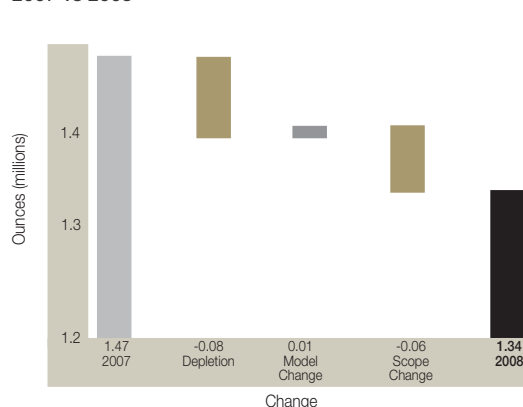

Ore Reserve

as at 31 December 2008

Navachab	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Gecko	Proved	–	–	–	–
	Probable	0.16	1.54	0.25	0.01
	Total	0.16	1.54	0.25	0.01
Grid A	Proved	0.38	1.92	0.72	0.02
	Probable	0.22	1.64	0.36	0.01
	Total	0.59	1.82	1.08	0.04
Main Pit	Proved	1.18	1.35	1.60	0.05
	Probable	27.20	1.27	34.58	1.11
	Total	28.38	1.27	36.18	1.16
Total stockpile	Proved	5.65	0.72	4.07	0.13
	Probable	–	–	–	–
	Total	5.65	0.72	4.07	0.13
Navachab	Total	34.78	1.20	41.58	1.34


INFERRED MINERAL RESOURCE IN BUSINESS PLAN

The Inferred Mineral Resource was used in the pit optimisation process and 0.14 million ounces are present in the optimised pit but 0.18 million ounces are included in the final production scheduling as the pit is designed beyond the optimised shell because of mining width constraints.

Namibia

Navachab cont.

Navachab – Surface (Metric)

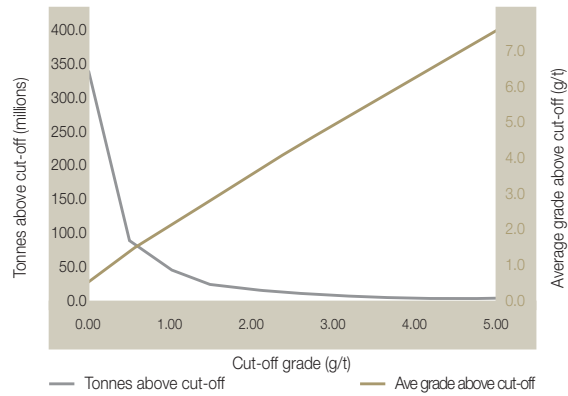


Competent persons

Type	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	F Badenhorst	AusIMM	211026	17 years
Ore Reserve	G Botshive	AusIMM	229475	9 years



Tanzania

Regional overview

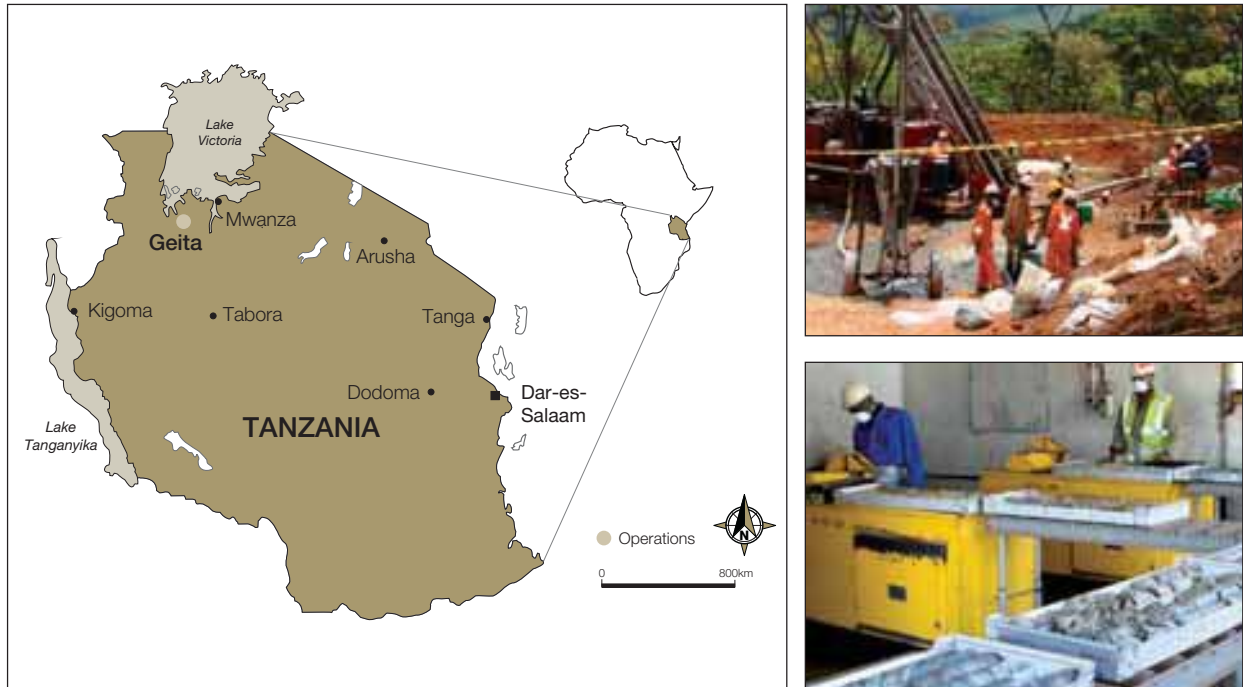

Geita is the largest of AngloGold Ashanti's seven open-pit mines in Africa. Prior to April 2004, Geita was managed under the joint venture agreement between Ashanti and AngloGold. Since the merger of the two companies, Geita is now a wholly-owned subsidiary.

MINERAL RESOURCE ESTIMATION

As with any estimation techniques the results are very dependent upon the data quality and availability. The geological model is a critical input to the Mineral Resource estimation process. The orebody boundaries for the individual deposits are defined from the detailed logging of all geological boreholes and after validation this information is used to create a three dimensional model. This model is subsequently populated with an appropriately dimensioned block model. The size of this block model is determined by analysing different block sizes in relation to the variance of the blocks. A block size which gives an optimal variance is then chosen. Ordinary kriging is used to interpolate values into the blocks. A geostatistical technique called Uniform Conditioning is then used to estimate the proportion of economic ore that occur above the Mineral Resource cut-off and this is reported according to the selective mining unit (SMU).

Mineral Resource and Ore Reserve gold price

	Units	2008	2007
Gold price – Mineral Resource	US\$/oz	1,000	700
Gold price – Ore Reserve	US\$/oz	720	600

Tanzania

Regional overview *cont.*

Details of average drillhole spacing and type in relation to Mineral Resource classification

Geita	Category	Spacing m (- x -)	Type of drilling				Comments
			Diamond	RC	Blasthole	Other	
	Measured	– – 10 x 10	–	✓	–	–	–
	Indicated	40 x 40	✓	✓	–	–	–
	Inferred	50 x 50 50 x 80	✓	✓	–	–	–
	Grade control	5 x 10 and 10 x 10	–	✓	–	–	–

ORE RESERVE ESTIMATION

The Mineral Resource models as produced by the geology department are used as the basis for the Ore Reserve. Appropriate mining dilution is used as a modifying factor in the Ore Reserve conversion process. Appropriate reserve cut-off grades are applied and optimised pit shells are generated taking into cognisance the economic parameters. The final pits are then designed taking into consideration the optimised pit shell and recommended slope geometry.

Ore Reserve modifying factors

as at 31 December 2008						
Geita	Cut-off grade g/t Au	Dilution %	Mine call factor (MCF)	Metallurgical recovery factor %	Comments	
Area 3 West	1.25-2.66	–	93.3	51.5-80.6	MCF reflects reconciliation concerns in first 5 years of the BP	
Chipaka	1.23-2.23	–	93.3	58.6-87.8	MCF reflects reconciliation concerns in first 5 years of the BP	
Full Grade stockpile	0.91-3.07	–	100	75.2-92.8	Used either \$720/oz or \$900/oz, depending on source	
Geita Hill Open Pit	0.72-1.17	–	90.2	78.6-87.8	12% reduction in tonnes over LOM, 23.5% drop in metal (2009), and 14.5% over rest of LOM	
Marginal stockpile	0.83-1.09	–	100	75.2-92.8	Used either \$720/oz or \$900/oz, depending on source	
Matandani	1.14-1.57	–	93.3	82.5	Only oxides considered for conversion to Ore Reserves	
Nyankanga Open Pit	0.7-1.05	–	90.2	88.2-91.6	4% reduction in tonnes over LOM, 22.7% drop in metal (2009-2010), and 17.2% over rest of LOM	
Ridge 8	1.14-2.01	–	93.3	66.4-85.1	MCF reflects reconciliation concerns in first 5 years of the BP	
Roberts	1.12-1.63	–	93.3	84.5-92.0	MCF reflects reconciliation concerns in first 5 years of the BP	
Star and Comet	0.78-1.25	–	90.2	84.4-92.8	4% reduction in tonnes and 12.6% drop in metal contained over LOM	

Reconciliation of Mineral Resource and Ore Reserve

as at 31 December 2008			Changes in gold contained						
Mine	Category	2007	Depletion ⁽¹⁾	Model change ⁽²⁾	Moz Scope change ⁽³⁾	2008	Net change Diff	%	Comment
Geita	Resource	12.45	(0.43)	0.37	0.46	12.86	0.40	3	Increase in underground potential due to lower cut-off and charges in Open Pit/UG interface (predominantly at Geita Hill). This offset the decrease due to model changes at Nyankanga.
	Reserve	6.48	(0.33)	(0.12)	(0.92)	5.11	(1.37)	(21)	Decrease due to Mineral Resource model changes and the application of grade factors to mitigate low model confidence. Cost increases also contributed to the decrease in Ore Reserves.
Total	Resource	12.45	(0.43)	0.37	0.46	12.86	0.40	3	
	Reserve	6.48	(0.33)	(0.12)	(0.92)	5.11	(1.37)	(21)	

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.

2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.

3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.



Tanzania

Geita



The Geita gold mine is located approximately 910km from Dar es Salaam in the Lake Zone of northern Tanzania; the tenement is situated within the Sukumaland Greenstone Belt of the Lake Victoria goldfields which host other gold mines including Golden Pride, Bulyanhulu, Tulawaka and North Mara. This geological terrain is considered to be one of the most productive Archaean Greenstone Belts in East Africa. Mining at Geita is undertaken by standard open-pit mining methods.

GEOLOGY

The Geita Greenstone trend is a component of the Sukumaland Greenstone Belt; it strikes east-west, is 60km long and up to 15km wide. The terrain is made up of upper to mid-Nyanzian greenstone facies rocks, mainly clastic sediments, intermediate to felsic volcanoclastics and Banded Iron Formation that forms a sedimentary sequence up to 1,000m thick.


In the mine lease area, north-west trending deformation corridors separate the Geita Greenstone trend into three distinct sub-terrains. Namely, Nyamulilima in the west (hosting the Star and Comet, Ridge 8, and Roberts deposits), Geita in the central part (hosting the Nyankanga, Geita Hill, Lone Cone, and Chipaka deposits) and Kukuluma to the north-east (hosting the Matandani, Kukuluma, and Area 3 West deposits). Approximately 83% of this resource is situated in the Geita Sub-Terrain, with 13% in the Nyamulilima Sub-Terrain, and 4% in the Kukuluma Sub-Terrain.

Late dextral faults have utilised these corridors, reactivating the pre-existing fault systems. Gold mineralisation and hydrothermal alteration of the host lithologies, on all scales, is associated with late stage ductile to brittle-ductile deformation.

Projects

With approximately 58% of the Kukuluma Sub-Terrain Mineral Resource comprising refractory ore, currently not economically treatable in the Geita treatment plant, a metallurgical project has been initiated to determine a treatment method for this material. Success in this regard could increase the potential of the underground Mineral Resource extension significantly below the Kukuluma and Matandani open pits.

With 3.6 million Mineral Resource ounces potentially exploitable by underground mining methods, Geita gold mine has begun an underground mining project to bring these Mineral Resources to Ore Reserves. To facilitate these projects the mine has initiated a 3D geological model of the Geita Trend that will amalgamate structure and mineralogy so as to optimise the definition of underground Mineral Resource extensions.

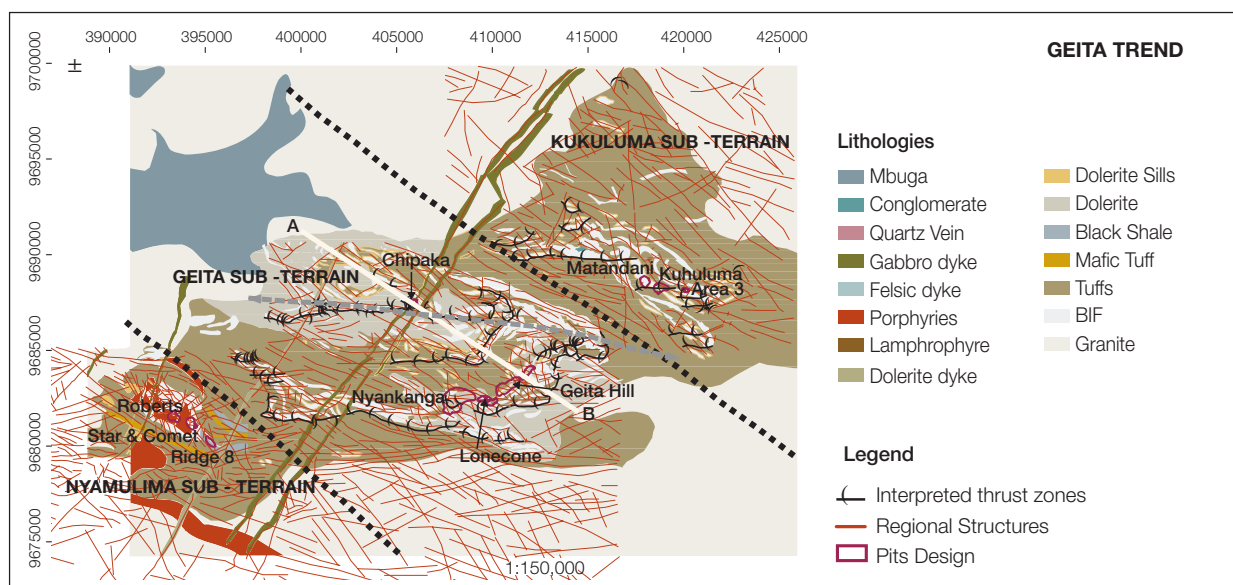

Mineral Resource

as at 31 December 2008

Geita	Category	Tonnes million	Grade (g/t)	Contained gold tonnes	Contained gold Moz
Area 3 West	Measured	–	–	–	–
	Indicated	1.01	2.49	2.53	0.08
	Inferred	0.01	4.65	0.02	–
	Total	1.02	2.50	2.55	0.08
Chipaka	Measured	–	–	–	–
	Indicated	2.50	2.28	5.71	0.18
	Inferred	–	–	–	–
	Total	2.50	2.28	5.71	0.18
Geita Hill Open Pit	Measured	–	–	–	–
	Indicated	18.07	2.99	54.09	1.74
	Inferred	0.12	2.42	0.29	0.01
	Total	18.19	2.99	54.37	1.75
Geita Hill Underground	Measured	–	–	–	–
	Indicated	6.27	4.99	31.31	1.01
	Inferred	3.13	5.30	16.59	0.53
	Total	9.40	5.10	47.90	1.54
Kalondwa Hill	Measured	–	–	–	–
	Indicated	–	–	–	–
	Inferred	1.05	3.67	3.84	0.12
	Total	1.05	3.67	3.84	0.12
Lone Cone	Measured	–	–	–	–
	Indicated	2.75	2.45	6.74	0.22
	Inferred	1.69	2.40	4.05	0.13
	Total	4.44	2.43	10.78	0.35

Tanzania

Geita cont.

Mineral Resource (cont.)					
as at 31 December 2008					
Geita	Category	Tonnes million	Grade (g/t)	Contained gold tonnes	Contained gold Moz
Matandani	Measured	–	–	–	–
	Indicated	3.34	3.24	10.80	0.35
	Inferred	0.03	4.74	0.13	–
	Total	3.37	3.25	10.94	0.35
Nyankanga Open Pit	Measured	–	–	–	–
	Indicated	26.13	4.80	125.29	4.03
	Inferred	10.77	2.68	28.81	0.93
	Total	36.89	4.18	154.10	4.95
Nyankanga Underground	Measured	–	–	–	–
	Indicated	3.21	5.91	18.99	0.61
	Inferred	5.48	5.26	28.85	0.93
	Total	8.69	5.50	47.83	1.54
Ridge 8	Measured	–	–	–	–
	Indicated	1.60	2.14	3.41	0.11
	Inferred	0.03	1.20	0.04	–
	Total	1.62	2.12	3.44	0.11
Ridge 8 Underground	Measured	–	–	–	–
	Indicated	1.10	8.17	9.03	0.29
	Inferred	2.13	5.26	11.17	0.36
	Total	3.23	6.25	20.20	0.65
Roberts	Measured	–	–	–	–
	Indicated	6.47	1.61	10.41	0.34
	Inferred	0.25	4.12	1.04	0.03
	Total	6.72	1.70	11.45	0.37
Star and Comet	Measured	–	–	–	–
	Indicated	3.36	4.96	16.66	0.54
	Inferred	0.45	2.09	0.94	0.03
	Total	3.81	4.62	17.60	0.57
Total stockpiles	Measured	–	–	–	–
	Indicated	8.02	1.14	9.15	0.29
	Inferred	–	–	–	–
	Total	8.02	1.14	9.15	0.29
Geita	Total	108.97	3.67	399.87	12.86


Exclusive Mineral Resource					
Geita	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	–	–	–	–
	Indicated	35.95	3.32	119.38	3.84
	Inferred	25.12	3.81	95.77	3.08
Geita	Total	61.07	3.52	215.15	6.92

The Exclusive Mineral Resource at Geita consists of the Mineral Resource that occurs between the Ore Reserve pit shell (\$720) and the Mineral Resource pit shell (\$1000). This material is sub economic to mine at the current Ore Reserve gold price and forms potential extensions to current life of mine (LOM) in an elevated gold price environment. A significant portion of this material is in the Inferred Mineral Resource category and infill drilling programs are planned to upgrade potentially economic areas to Indicated Mineral Resources.


In instances where the ore body extends down dip to below the current LOM design pit shell, a 35 m crown pillar below the bottom of the pit shell forms part of the Exclusive Mineral Resource. This material is not planned to be mined.

A large portion of the Exclusive Mineral Resources also occurs as underground extensions to the current open pit design shells. Scoping and pre-feasibility studies are currently in progress to determine the economic viability of this material. As part of these studies, exploration drives and infill drilling are planned to upgrade the confidence category of the Mineral Resource.

Geita: Mineral Resource reconciliation 2007 vs 2008

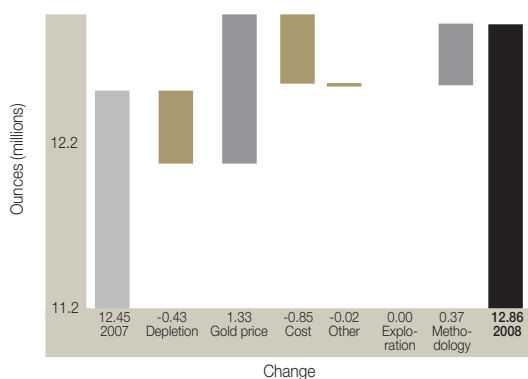

Geita: Ore Reserve reconciliation 2007 vs 2008

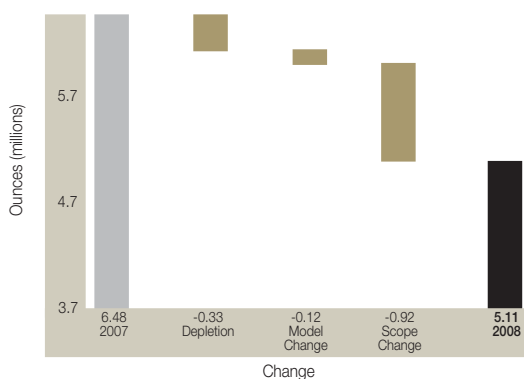


Tanzania


Geita cont.


Ore Reserve					
as at 31 December 2008					
Geita	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Area 3 West	Proved	–	–	–	–
	Probable	0.63	2.44	1.54	0.05
	Total	0.63	2.44	1.54	0.05
Chipaka	Proved	–	–	–	–
	Probable	1.19	2.40	2.84	0.09
	Total	1.19	2.40	2.84	0.09
Geita Hill Open Pit	Proved	–	–	–	–
	Probable	16.44	2.59	42.62	1.37
	Total	16.44	2.59	42.62	1.37
Matandani	Proved	–	–	–	–
	Probable	0.49	2.96	1.44	0.05
	Total	0.49	2.96	1.44	0.05
Nyankanga Open Pit	Proved	–	–	–	–
	Probable	21.92	3.80	83.34	2.68
	Total	21.92	3.80	83.34	2.68
Ridge 8	Proved	–	–	–	–
	Probable	0.68	2.62	1.78	0.06
	Total	0.68	2.62	1.78	0.06
Roberts	Proved	–	–	–	–
	Probable	2.23	1.65	3.68	0.12
	Total	2.23	1.65	3.68	0.12
Star and Comet	Proved	–	–	–	–
	Probable	3.18	4.41	14.01	0.45
	Total	3.18	4.41	14.01	0.45
Total stockpiles	Proved	–	–	–	–
	Probable	7.54	1.03	7.80	0.25
	Total	7.54	1.03	7.80	0.25
Geita	Total	54.30	2.93	159.06	5.14

Geita – Underground (Metric)

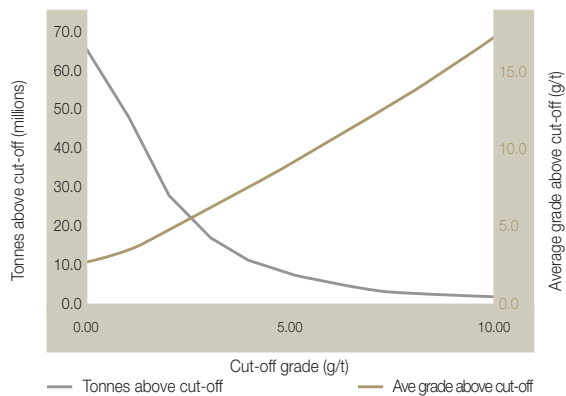

Geita – Surface (Metric)

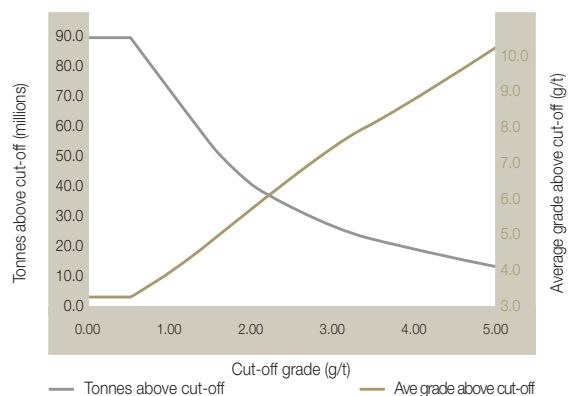

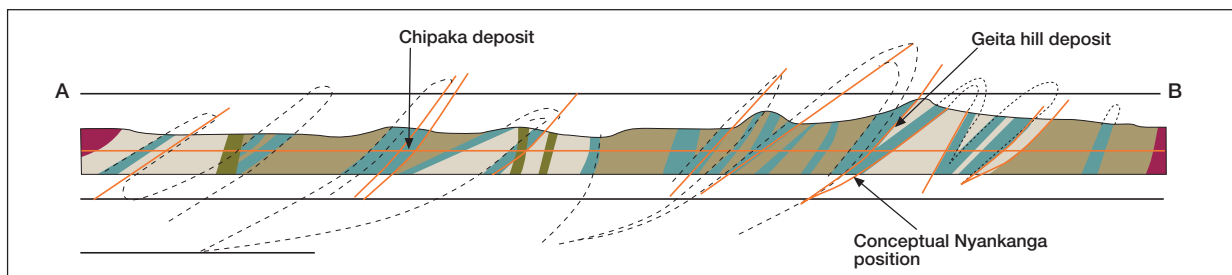


Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	S Robins	AusIMM	222533	13 years
Ore Reserve	A Murray	AusIMM	208304	20 years



United States

Regional overview

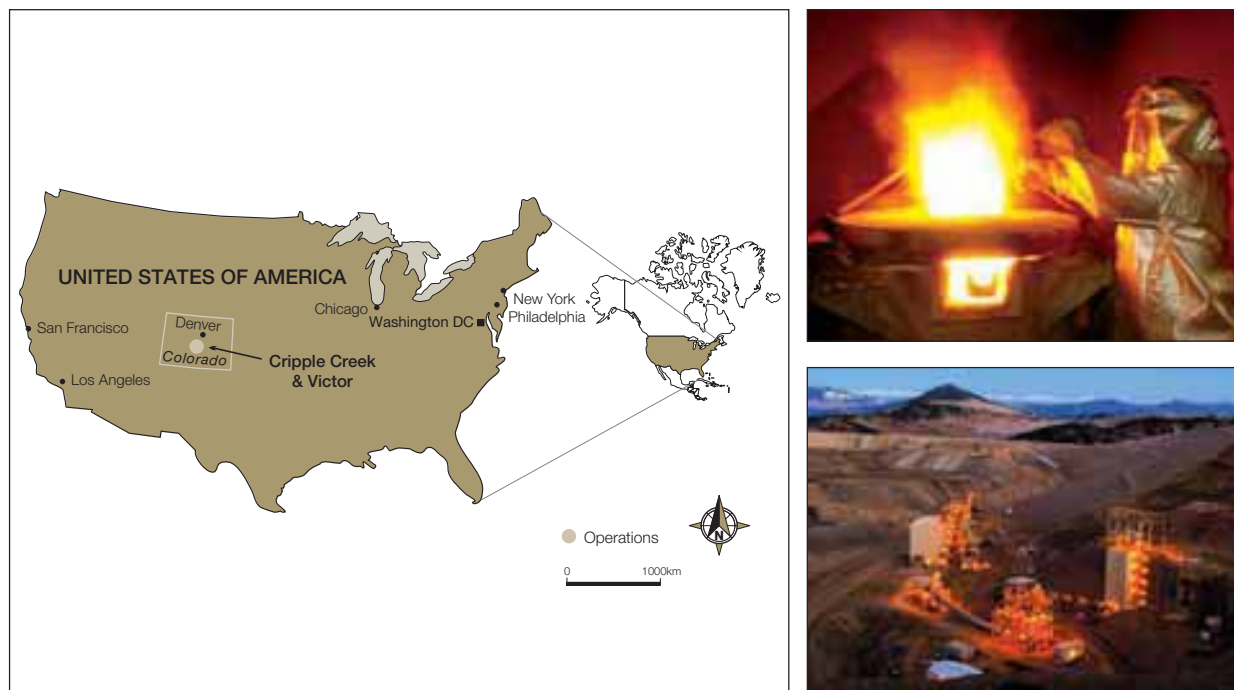

In March 1999 AngloGold Ashanti acquired the Pikes Peak Mining Company, and interests in the Cripple Creek & Victor Gold Mining Company (CC&V) and the Jerritt Canyon joint ventures.

MINERAL RESOURCE ESTIMATION

A single unified Mineral Resource model has been developed for the entire district. The unified model encompasses all known deposits and drilling within the CC&V property. Smaller sub-models are maintained for Altman and Wild Horse to accommodate the vertical shift in the mining benches. The estimation method is multiple indicator kriging (MIK) and the primary variable estimated is the recoverable gold (not contained gold). An estimated iron and oxide model is utilised to interpolate block specific coefficients for input into the metallurgical recovery function.

The method for calculating nominal shake leach values (SLV) is a robust regression technique using geologically logged categorical variables. Modelling software is MineSight® and updated drillhole information is used throughout. The drillhole database is thoroughly reviewed before each Mineral Resource estimation and the estimation domains are based primarily on lithology for each deposit.

Mineral Resource and Ore Reserve gold price

	Units	2008	2007
Gold price – Mineral Resource	US\$/oz	1,000	700
Gold price – Ore Reserve	US\$/oz	720	600

Details of average drillhole spacing and type in relation to Mineral Resource classification

CC&V	Category	Spacing m (- x -)	Type of drilling				Comments
			Diamond	RC	Blasthole	Other	
	Measured	30 x 30	✓	✓	-	-	
	Indicated	45 x 45	✓	✓	-	-	
	Inferred	75 x 75	✓	✓	-	-	
	Grade control	5 x 6	-	-	✓	-	

ORE RESERVE ESTIMATION

The Ore Reserve pit designs were based on LG optimisations of the geological model. The LG algorithm applies economic values to individual blocks and then generates a pit shell based on geotechnical constraints. Successive nested shells are generated until the economic limits of the pit are established. These shells are then used as a template for final mine design. Pit slope designs for all deposits were based on geotechnical studies and fell into two categories of overall angles (60° and 45°). All deposits were designed using a 10.7m (35 feet) bench height.

INFERRED MINERAL RESOURCE IN BUSINESS PLAN

Inferred Mineral Resource is not used in the pit optimisation.

Ore Reserve modifying factors

as at 31 December 2008					
CC&V	Cut-off grade g/t Au	Mine call factor (MCF)	Metallurgical recovery factor %	Comments	
Altman	0.36	100	50		
Cresson	0.35	100	54		
Globe Hill	0.21	100	77		
Schist Island	0.24	100	61		
South Cresson	0.26	100	50		
Wild Horse Extension	0.26	100	50		
Wildhorse	0.34	100	60		

United States

Regional overview *cont.*

Reconciliation of Mineral Resource and Ore Reserve

as at 31 December 2008			Changes in gold contained							
Mine	Percentage attributable	Category	2007	Depletion ⁽¹⁾	Model change ⁽²⁾	Scope change ⁽³⁾	Moz		Net change	% Comment
							2008	2008		
CC&V	100%	Resource	12.07	(0.48)	–	1.72	13.31	1.24	10	Successful exploration of completion of conceptual studies for MLE2 and MLE3
		Reserve	4.75	(0.48)	0.20	0.45	4.93	0.17	4	Stated reserves fill current leach pad capacity, including the addition of MLE1 (phase 5 extension). Reserve is constrained by leach pad capacity until the pre-feasibility study of MLE2 is completed.
Total		Resource	12.07	(0.48)	–	1.72	13.31	1.24	10	
		Reserve	4.75	(0.48)	0.20	0.45	4.93	0.17	4	

1. Depletion: reduction in Ore Reserve based on ore delivered to the plant and corresponding in situ reduction in the Mineral Resource.

2. Model change: difference between the Ore Reserve based on the start of year and end of year Mineral Resource models.

3. Scope change: difference resulting from change in cut-off grade, mine call factor, new project studies and any other factors influencing the Mineral Resource and Ore Reserve estimations.



United States

Cripple Creek and Victor



BACKGROUND

Cripple Creek & Victor (CC&V) is located south-west of Colorado Springs in the state of Colorado in the United States. Large-scale surface mining began in 1991 and grew with the start of production at the CC&V Cresson Project in 1994. Today, CC&V is a low-grade, open-pit operation. The ore is treated using a valley-type, heap-leach process with activated carbon used to recover the gold. The resulting doré buttons are shipped to a refinery for final processing.

MINE LIFE EXTENSION PROJECT

CC&V has completed a feasibility study for a mine life extension (MLE) project that would extend its LOM.

The MLE would extend mining slightly in two areas of the existing Main Cresson Mine, extend mining to the north into the Wild Horse Extension of the East Cresson Mine, and extend mining to the north and south of the Schist Island Mine in the areas of the prior Globe Hill Mine. Processing and recovery of the additional gold will be completed through a Phase 5 extension of the existing VLF. Overburden resulting from mining in these extension areas will be placed into portions of the existing Main Cresson Mine, East Cresson Mine, and North Cresson Mine as mine backfill or placed for storage in the existing Squaw Gulch Overburden Storage Area.

Approximately 103 million tonnes of additional ore and 250 million tonnes of additional overburden will be mined within the proposed MLE areas for a total of 353 million tonnes over the additional four years of mining in the MLE area. The ore will be crushed and processed using the existing crushing and conveying facilities. Ore will be processed on the existing VLF and the Phase 5 extension, and recovered in the existing process facility.

United States

Cripple Creek and Victor *cont.*

GEOLOGY

The mining district is located between the towns of Cripple Creek and Victor. The dominant geological feature is a Tertiary-aged, diatreme intrusive complex 6.4km long, 3.2km wide. The diatreme-intrusive complex is hosted in Precambrian age rocks including biotite gneiss, granodiorite, quartz monzonite and granite. The diatreme is primarily composed of highly variable eruptive phase Cripple Creek Breccias, and volcanoclastics, intruded by stocks, dykes, sills and discordant breccias, composed of alkaline phonolite-phonotephrite petrographic series rock types followed by late lamprophyre dykes and breccia pipes. The host rocks have undergone a complex history of structural deformation and hydrothermal activity and alteration. Gold mineralisation post dates volcanic activity, and is hosted in all rock types as veins and disseminated and/or structurally controlled orebodies. The gold mineralisation has been dated between 27.8Ma and 26.6Ma.

District structures are generally near vertical and strike north-north-west to north-east. These structures commonly controlled the intrusions and acted as primary conduits for late-stage, gold mineralising solutions. Higher grade pods of mineralisation occur at structural intersections and/or as sheeted vein zones along zones of strike deflection. High-grade gold mineralisation is associated with K-feldspar + pyrite +/- carbonate alteration and occurs adjacent to the major structural and intrusive dyke zones. The broader zones of disseminated mineralisation occur primarily as micro-fracture halos around the stronger alteration zones in the more permeable Cripple Creek Breccia wall rocks.

The average depth of oxidation is 120m and is also developed along major structural zones to even greater depths. Individual orebodies can be tabular, pipe-like, irregular or massive. Individual gold particles are generally less than 20 microns in size. Gold occurs as native gold with pyrite, native gold and gold-silver tellurides. In the oxide zone, gold occurs with hydrous iron and manganese oxides. Silver is present but is economically unimportant. Iron and manganese oxides, pyrite, K-feldspar alteration and quartz can encapsulate gold mineralisation locally.

Mineral Resource

as at 31 December 2008


CC&V	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Cresson	Measured	255.90	0.87	223.31	7.18
	Indicated	183.75	0.73	134.97	4.34
	Inferred	83.61	0.66	55.60	1.79
	Total	523.26	0.79	413.88	13.31
CC&V	Total	523.26	0.79	413.88	13.31

Exclusive Mineral Resource


CC&V	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
	Measured	143.33	0.83	118.71	3.82
	Indicated	128.04	0.67	86.38	2.78
	Inferred	83.61	0.66	55.60	1.79
CC&V	Total	354.99	0.73	260.69	8.38

The Exclusive Mineral Resources at CC&V lie peripheral to, and along mineralised strike extensions in the current pit designs. None of this material will be brought into the Ore Reserves during 2009 as CC&V is currently engaged in a Mine Life Extension (MLE-2) Pre-Feasibility Study. The study will be completed at the end of 2009 and a portion of the material is then expected to be brought into the Ore Reserves in 2010.

Cripple Creek and Victor: Mineral Resource reconciliation 2007 vs 2008

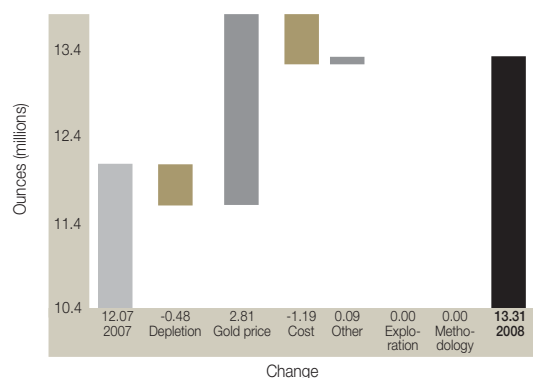

Cripple Creek and Victor: Ore Reserve reconciliation 2007 vs 2008

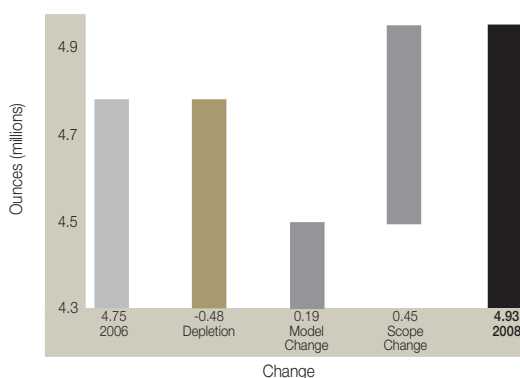

Ore Reserve


as at 31 December 2008

CC&V	Category	Tonnes million	Grade g/t	Contained gold tonnes	Contained gold Moz
Altman	Proved	0.73	0.87	0.63	0.02
	Probable	0.08	0.59	0.04	-
	Total	0.80	0.84	0.68	0.02
Cresson	Proved	63.07	0.93	58.41	1.88
	Probable	31.98	0.89	28.49	0.92
	Total	95.05	0.91	86.90	2.79
Globe Hill	Proved	7.11	0.51	3.66	0.12
	Probable	4.30	0.45	1.94	0.06
	Total	11.41	0.49	5.60	0.18
Schist Island	Proved	12.42	0.74	9.24	0.30
	Probable	7.78	0.75	5.87	0.19
	Total	20.20	0.75	15.11	0.49
South Cresson	Proved	12.02	0.85	10.22	0.33
	Probable	2.48	0.89	2.21	0.07
	Total	14.50	0.86	12.43	0.40
Wild Horse Extension	Proved	16.55	1.32	21.78	0.70
	Probable	8.98	1.11	9.95	0.32
	Total	25.53	1.24	31.73	1.02
Wildhorse	Proved	0.67	0.97	0.65	0.02
	Probable	0.11	0.79	0.09	-
	Total	0.78	0.94	0.74	0.02
CC&V	Total	168.27	0.91	153.19	4.93

United States

Cripple Creek and Victor *cont.*

CC&V – Surface (Metric)

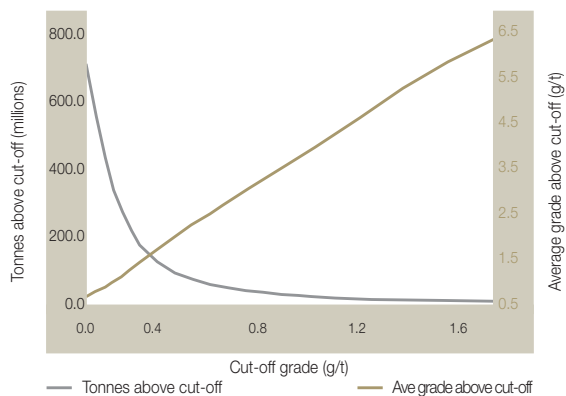

Competent persons

Category	Name	Professional organisation	Registration number	Relevant experience
Mineral Resource	T Brown	AusIMM	226857	24 years
Ore Reserve	A Keith	SME	1689600	27 years



Definitions

MINERAL RESOURCE

The SAMREC/JORC definition of a Mineral Resource is as follows:

A Mineral Resource is a concentration or occurrence of material of intrinsic economic interest in or on the earth's crust in such form, quality and quantity that there are reasonable prospects for eventual economic extraction. The location, quantity, grade, geological characteristics and continuity of a Mineral Resource are known, estimated or interpreted from specific geological evidence and knowledge. Mineral Resources are subdivided, in order of increasing geological confidence, into Inferred, Indicated and Measured categories.

The Mineral Resource is estimated using all drilling and sampling information along with a detailed geological model. The geological models are based on core logging, mapping, geophysics, geochemistry and geological understanding that have been developed for each deposit. Most of the AngloGold Ashanti deposits have been the subject of research by world experts in the class of gold deposit.

The grade estimation for each deposit has been developed over the life of the mine and is constantly reviewed in terms of grade control information and reconciliation with the metallurgical plant. In general, the deep South African mines utilise a process of compound log normal macro kriging for the estimation of the Mineral Resource, while the open pits and shallow underground mines generally use recoverable Mineral Resource models, estimated using uniform conditioning or multiple indicator kriging.

In order to comply with the economic requirement of the definition of Mineral Resource, all AngloGold Ashanti Mineral Resources are constrained at an upside gold price, with all other parameters being kept the same as used for estimation of the Ore Reserve. In the underground gold mines, scoping studies are conducted on all coherent blocks of ground that lie above the calculated Mineral Resource cut-off. These studies include all cost and capital requirements to access the block. In the case of open pit operations, pit optimisations are conducted at the Mineral Resource gold price and all material outside these shells is excluded from the Mineral Resource, unless it is potentially mineable from underground.

It is the opinion of AngloGold Ashanti that the Mineral Resource represents a realistic view of an upside potential to the Ore Reserve. In interpreting the Mineral Resource it is critical to factor in the following:

- The Mineral Resource is quoted in situ and has not been corrected for dilution, mining losses or recovery.
- The Mineral Resource includes a high percentage of inferred material, which, following further exploration drilling may be converted to an Indicated or Measured Mineral Resource.
- Many of the areas lying in the exclusive Mineral Resource are currently being actively drilled and are the subject of economic and technical studies. It can, however, not be assumed at this stage that the company has intent to mine these areas.

Mineral Resource classification is based on the '15% Rule'. A Measured Mineral Resource should be expected to be within 15% of the quarterly metal estimate at least 90% of the time, while for an Indicated Mineral Resource estimate the annual metal estimate should be within 15% of the metal estimated at least 90% of the time. For an Inferred Mineral Resource the annual error may for 90% of the time, be greater than 15%.

The process and methodology of classification are at the discretion of the competent person and involves expressing the '15% Rule' as a required level of information, in tangible terms the spacing of the drillhole or tunnel spacing in a particular deposit. Techniques such as conditional simulation or even an empirical reconciliation-based approach are employed. However, all operations are responsible for demonstrating, through reconciliation, that their classification system conforms to the 15% rule set out above.

AngloGold Ashanti quotes its Mineral Resource as inclusive of the Ore Reserve. However, in this document the exclusive Mineral Resource is also quoted. The exclusive Mineral Resource is defined as the inclusive Mineral Resource less the Ore Reserve before dilution and other factors are applied.

Definitions

cont.

The exclusive Mineral Resource consists of the following components:

- Inferred Mineral Resource within the optimised shell;
- Other Inferred Mineral Resource;
- Measured and Indicated Mineral Resource that lies between the life of mine (LOM) pit shell/mine design and the Mineral Resource pit shell. This material will become economic if the gold price increases; and
- Mineral Resource where the technical studies to engineer an Ore Reserve have not yet been completed.

ORE RESERVE

The SAMREC/JORC definition of an Ore Reserve is as follows:

An Ore Reserve is the economically mineable part of a Measured and/or Indicated Mineral Resource. It includes diluting materials and allowances for losses, which may occur when the material is mined. Appropriate assessments and studies have been carried out, and include consideration of and modification by realistically assumed mining, metallurgical, economic, marketing, legal, environmental, social and governmental factors. These assessments demonstrate at the time of reporting that extraction could reasonably be justified. Ore Reserves are sub-divided, in order of increasing confidence, into Probable Ore Reserves and Proved Ore Reserves.

In the underground operations Ore Reserves are based on a full mine design and in the case of open pits on a pit optimisation followed by a final pit design. Ore Reserves are reported according to tonnage, mean grade(s), and contained metal inclusive of mining dilution, mining ore losses and mine call factors. These modifying factors are based on measurements, rather than estimates. Tonnage and grade estimates for surface stockpile materials that meet Ore Reserve criteria are itemised separately.

Only those Ore Reserves included for treatment in the business unit plan production schedule are considered in the Ore Reserve statement. These sometimes include marginal or sub-grade ores as well as Inferred Mineral Resource. These Inferred Mineral Resources are not included in the Ore Reserve statement.

For new projects an Ore Reserve is only reported if an auditable pre-feasibility or feasibility study has been completed that demonstrates the viability of the project and meets the company's investment requirements. There should also be intent on the part of the company to proceed to feasibility and ultimately a mining phase.

Glossary

of terms

ALL TERMS

BIF

Banded Ironstone Formation. A chemically formed iron-rich sedimentary rock.

By-products

Any products that emanate from the core process of producing gold, including silver, uranium and sulphuric acid.

Calc-silicate rock

A metamorphic rock consisting mainly of calcium-bearing silicates such as diopside and wollastonite, and formed by metamorphism of impure limestone or dolomite.

Capital expenditure

Total capital expenditure on tangible assets which includes stay-in-business and project capital.

Carbon-in-leach (CIL)

Gold is leached from a slurry of gold ore with cyanide in agitated tanks and adsorbed on to carbon granules in the same circuit. The carbon granules are separated from the slurry and treated in an elution circuit to remove the gold.

Carbon-in-pulp (CIP)

Gold is leached conventionally from a slurry of gold ore with cyanide in agitated tanks. The leached slurry then passes into the CIP circuit where carbon granules are mixed with the slurry and gold is adsorbed on to the carbon. The granules are separated from the slurry and treated in an elution circuit to remove the gold.

Comminution

Comminution is the crushing and grinding of ore to make gold available for treatment. (See also "Milling").

Contained gold

The total gold content (tons multiplied by grade) of the material being described.

Cut-off grade – surface mines (COG)

The minimum grade at which a unit of ore will be mined to achieve the desired economic outcome.

Depletion

The decrease in quantity of ore in a deposit or property resulting from extraction or production.

Development

The process of accessing an orebody through shafts and/or tunnelling in underground mining operations.

Discontinued operation

A component of an entity that, pursuant to a single plan, has been disposed of or abandoned or is classified as held-for-sale until conditions precedent to the sale have been fulfilled.

Doré

Impure alloy of gold and silver produced at a mine to be refined to a higher purity, usually consisting of 85% gold on average.

Electro-winning

A process of recovering gold from solution by means of electrolytic chemical reaction into a form that can be smelted easily into gold bars.

Elution

Recovery of the gold from the activated carbon into solution before zinc precipitation or electro-winning.

Full grade ore (FGO)

FGO is ore material with sufficient grade to carry the full operating cost. FGO cut-off is the break-even grade where cost is representative of all costs to carry the full operation excluding direct mining cost.

Glossary

of terms *cont.*

Gold produced

Refined gold in a saleable form derived from the mining process.

Grade

The quantity of gold contained within a unit weight of gold-bearing material generally expressed in ounces per short ton of ore (oz/t), or grams per metric tonne (g/t).

Leaching

Dissolution of gold from crushed or milled material, including reclaimed slime, prior to adsorption on to activated carbon.

Life of mine (LOM)

Number of years that the operation is planning to mine and treat ore, and is taken from the current mine plan.

Marginal ore (MO)

MO is ore material with grade below the FGO cut-off that can be economically treated at the end of mine life when overhead and mining costs are reduced. MO cut-off is the break-even grade where cost is representative of the reduced cost that will be experienced after mining has ended.

Metallurgical plant

A processing plant erected to treat ore and extract gold.

Milling

A process of reducing broken ore to a size at which concentrating can be undertaken. (See also "Comminution")

Mine call factor (MCF)

The ratio, expressed as a percentage, of the total quantity of recovered and unrecovered mineral product after processing with the amount estimated in the ore based on sampling. The ratio of contained gold delivered to the metallurgical plant divided by the estimated contained gold of ore mined based on sampling.

Mineral deposit

A mineral deposit is a concentration (or occurrence) of material of possible economic interest in or on the Earth's crust.

Mining reconciliation factor (MRF)

This is the variance between the gold called for as defined by the ore perimeters and what the processing plant receives. It is expressed in both a grade and tonnage number.

Ounce (oz) (troy)

Used in imperial statistics. A kilogram is equal to 32.1507 ounces. A troy ounce is equal to 31.1035 grams.

Pay limit

The grade of a unit of ore at which the revenue from the recovered mineral content of the ore is equal to the total cash cost including Ore Reserve Development and stay-in-business capital. This grade is expressed as an in-situ value in grams per tonne or ounces per short ton (before dilution and mineral losses).

Precipitate

The solid product of chemical reaction by fluids such as the zinc precipitation referred to below.

Price received (\$/oz and R/kg)

Attributable gold income including realised non-hedge derivatives divided by attributable ounces or kilograms sold.

Productivity

An expression of labour productivity based on the ratio of grams of gold produced per month to the total number of employees in underground mining operations.

Reclamation

In the South African context, reclamation describes the process of reclaiming slimes (tailings) dumps using high-pressure water cannons to form a slurry which is pumped back to the metallurgical plants for processing.

Recovered grade

The recovered mineral content per unit of ore treated.

Reef

A gold-bearing sedimentary horizon, normally a conglomerate band that may contain economic levels of gold.

Refining

The final purification process of a metal or mineral.

Region

Defines the operational management divisions within AngloGold Ashanti, namely South Africa, Argentina, Australia, Brazil, Ghana, Guinea, Mali, Namibia, Tanzania and United States of America.

Rehabilitation

The process of reclaiming land disturbed by mining to allow an appropriate post-mining use. Rehabilitation standards are defined by country-specific laws including, but not limited to the South African Department of Minerals and Energy, the US Bureau of Land Management, the US Forest Service, and the relevant Australian mining authorities, and address among other issues, ground and surface water, topsoil, final slope gradient, waste handling and re-vegetation issues.

Resource reconciliation factor (RRF)

This is the variance between the resource model and the ore perimeters.

Seismic event

A sudden inelastic deformation within a given volume of rock that radiates detectable seismic energy.

Shaft

A vertical or subvertical excavation used for accessing an underground mine; for transporting personnel, equipment and supplies; for hoisting ore and waste; for ventilation and utilities; and/or as an auxiliary exit.

Smelting

A pyro-metallurgical operation in which gold is further separated from impurities.

Stay-in-business capital

Capital expenditure to maintain existing production assets. This includes replacement of vehicles, plant and machinery, ore reserve development and capital expenditure related to safety, health and the environment.

Stope

Underground excavation where the orebody is extracted.

Stopping

The process of excavating ore underground.

Stripping ratio

The ratio of waste tonnes to ore tonnes mined calculated as total tonnes mined less ore tonnes mined divided by ore tonnes mined.

Tailings

Finely ground rock of low residual value from which valuable minerals have been extracted.

Tailings dam (slimes dam)

Dam facilities designed to store discarded tailings.

Tonne

Used in metric statistics. Equal to 1,000 kilograms.

Ton

Used in imperial statistics. Equal to 2,000 pounds. Referred to as a short ton.

Glossary

of terms *cont.*

Tonnage

Quantity of material measured in tonnes or tons.

Waste

Material that contains insufficient mineralisation for consideration for future treatment and, as such, is discarded.

ABBREVIATIONS

\$	United States dollars
A\$ or AUD	Australian dollars
ADS	American Depositary Share
ADR	American Depositary Receipt
ARS	Argentinean peso
ASX	Australian Stock Exchange
Au	Contained gold
BCM	Bank cubic metres, ie ore in the ground
BIF	Banded iron formation
BRL	Brazilian real
capex	Capital expenditure
CIL	Carbon-in-leach
CIP	Carbon-in-pulp
CLR	Carbon Leader Reef
FGO	Full grade ore
g	Grams
g/t	Grams per tonne
g/TEC	Grams per total employee costed
JORC	Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves
JSE	JSE Limited
kg	Kilograms
LOM	Life of mine
m ² /TEC	Square metres per total employee costed
M or m	Metre or million, depending on the context
Moz	Million ounces
Mt	Million tonnes or tons
Mtpa	Million tonnes/tons per annum
oz	Ounces (troy)
oz/t	Ounces per ton
R or ZAR	South African rands
SAMREC	South African Code for the Reporting of Mineral Resources and Mineral Reserves
t	Tons (short) or tonnes (metric)
tpm	Tonnes/tons per month
tpa	Tonnes/tons per annum
tpd	Tonnes/tons per day
VCR	Ventersdorp Contact Reef
VR	Vaal Reef

Forward-looking statements

Certain statements contained in this document, including, without limitation, those concerning AngloGold Ashanti's strategy to reduce its gold hedging position, including the extent and effect of the hedge reduction, the economic outlook for the gold mining industry, expectations regarding gold prices, production, cash costs and other operating results, growth prospects and outlook of AngloGold Ashanti's operations, individually or in the aggregate, including the completion and commencement of commercial operations of certain of AngloGold Ashanti's exploration and production projects and completion of acquisitions and dispositions, including the disposition of AngloGold Ashanti's interest in the Boddington Project, AngloGold Ashanti's liquidity and capital resources and capital expenditure, and the outcome and consequence of any pending litigation proceedings, contain certain forward-looking statements regarding AngloGold Ashanti's operations, economic performance and financial condition. Although AngloGold Ashanti believes that the expectations reflected in such forward-looking statements are reasonable, no assurance can be given that such expectations will prove to have been correct. Accordingly, results could differ materially from those set out in the forward-looking statements as a result of, amongst other factors, changes in economic and market conditions, success of business and operating initiatives, changes in the regulatory environment and other government actions, fluctuations in gold prices and exchange rates, and business and operational risk managements. For a discussion of such risk factors, refer to the section titled "Risk management and internal controls" in these annual financial statements. AngloGold Ashanti undertakes no obligation to update publicly or release any revisions to these forward-looking statements to reflect events or circumstances after the date of these annual financial statements or to reflect the occurrence of unanticipated events. All subsequent written or oral forward-looking statements attributable to AngloGold Ashanti or any person acting on its behalf are qualified by the cautionary statements herein.

Administrative information

ANGLOGOLD ASHANTI LIMITED

Registration No.
1944/017354/06
Incorporated in the Republic of
South Africa

Share codes:
ISIN: ZAE000043485

JSE: ANG
LSE: AGD
NYSE: AU
ASX: AGG
GhSE (Shares): AGA
GhSE (GhDS): AADA
Euronext Paris: VA
Euronext Brussels: ANG

JSE Sponsor: UBS Limited

Auditors: Ernst & Young Inc.

OFFICES

Registered and Corporate

76 Jeppe Street
Newtown 2001
(PO Box 62117, Marshalltown
2107)
South Africa
Telephone: +27 11 637 6000
Fax: +27 11 637 6624

Australia

Level 13, St Martins Tower
44 St George's Terrace
Perth, WA 6000
(PO Box Z5046, Perth WA 6831)
Australia
Telephone: +61 8 9425 4602
Fax: +61 8 9425 4662

Ghana

Gold House
Patrice Lumumba Road
(PO Box 2665)
Accra
Ghana
Telephone: +233 21 772190
Fax: +233 21 778155

United Kingdom Secretaries

St James's Corporate Services
Limited
6 St James's Place
London SW1A 1NP
England
Telephone: +44 20 7499 3916
Fax: +44 20 7491 1989
E-mail:
jane.kirton@corpsev.co.uk

DIRECTORS

Executive

M Cutifani † (Chief Executive
Officer)
S Venkatakrishnan *

Non-Executive

RP Edey * (Chairman)
Dr TJ Motlatsi (Deputy Chairman)
FB Arisman #
RE Bannerman ‡
JH Mensah ‡
WA Nairn
Prof WL Nkuhlu
SM Pityana

* British # American
‡ Ghanaian † Australian

Company Secretary

Ms L Eatwell

CONTACTS

Charles Carter

Telephone: +27 11 637 6385
Fax: +27 11 637 6400
E-mail:
cecarter@AngloGoldAshanti.com

Himesh Persotam

Telephone: +27 11 637 6647
Fax: +27 11 637 6400
E-mail:
hpersotam@AngloGoldAshanti.com

General e-mail enquiries

investors@AngloGoldAshanti.com

AngloGold Ashanti website

www.AngloGoldAshanti.com

Annual report website

www.aga-reports.com

Company secretarial e-mail

companysecretary@AngloGold
Ashanti.com

AngloGold Ashanti posts infor-
mation that is important
to investors on the main page
of its website at www.anglgo-
ldashanti.com and under the
"Investors" tab on the main page.
This information is updated regu-
larly. Investors should visit this
website to obtain important infor-
mation about AngloGold Ashanti.

SHARE REGISTRARS

South Africa

Computershare Investor Services
(Pty) Limited
Ground Floor, 70 Marshall Street
Johannesburg 2001
(PO Box 61051, Marshalltown
2107)
South Africa
Telephone: 0861 100 724 (in SA)
Fax: +27 11 688 5218
web.queries@computershare.co.za

United Kingdom

Computershare Investor
Services PLC
PO Box 82
The Pavilions
Bridgwater Road
Bristol BS99 7NH
England
Telephone: +44 870 702 0000
Fax: +44 870 703 6119

Australia

Computershare Investor Services
Pty Limited
Level 2, 45 St George's Terrace
Perth, WA 6000
(GPO Box D182 Perth, WA 6840)
Australia
Telephone: +61 8 9323 2000
Telephone: 1300 55 2949 (in
Australia)
Fax: +61 8 9323 2033

Ghana

NTHC Limited
Martco House
Off Kwame Nkrumah Avenue
PO Box K1A 9563 Airport
Accra
Ghana
Telephone: +233 21 229664
Fax: +233 21 229975

ADR DEPOSITARY

The Bank of New York Mellon
BNY Mellon Shareowner Services
P O Box 358016
Pittsburgh, PA 15252-8016
United States of America
Telephone: +1 800 522 6645
(Toll free in USA)
International Calls: +1 201 680 6578
E-mail:
shrrelations@mellon.com
Website:
www.bnymellon.com/shareowner

Global BuyDIRECTSM
BoNY maintains a direct share
purchase and dividend reinvest-
ment plan for AngloGold Ashanti.
Telephone: +1-888-BNY-ADRS

The Annual Financial Statements 2008 is available in printed or CD format from the contacts whose details appear above or on the Internet at the above-mentioned website address. In addition, AngloGold Ashanti must by no later than 30 June 2009, produce a Form 20-F (a report required by the Securities and Exchange Commission in the United States), copies of which will be available free of charge on EDGAR at www.sec.gov, or from the contacts detailed above. A signed copy of the Annual Financial Statements 2008 may be viewed at the company's registered address.

Supplementary information on Mineral Resources, Ore Reserves and development, prepared on a business unit basis, is obtainable from the above sources as well as in PDF format on the AngloGold Ashanti website. Plans of the South Africa region underground workings are also available on request.



ANGLOGOLD ASHANTI

www.anglogoldashanti.com

SIGNATURES

Pursuant to the requirements of the Securities Exchange Act of 1934, the registrant has duly caused this report to be signed on its behalf by the undersigned, thereunto duly authorized.

Date: March 27, 2009

AngloGold Ashanti Limited

By: /s/ L Eatwell
Name: L Eatwell
Title: Company Secretary